
















P

SERIES

















SELECTION

Line-up includes a selection of eight indoor units and four series of outdoor units.
Easily construct a system that best matches room air conditioning needs.

R32 INDOOR UNIT		R32 OUTDOOR UNIT	
 4-way ceiling-cassette PLA-ZM EA PLA-M EA  Ceiling-concealed PEAD-M  Ceiling-suspended PCA-M  Professional Kitchen PCA-M HA  Wall-mounted PKA-M LA (L) PKA-M KA (L)  Ceiling-concealed PEA-M  Floor-standing PSA-M		Power Inverter  PUZ-ZM35/50  PUZ-ZM60/71  PUZ-ZM100/125/140/ 200/250	Standard Inverter  SUZ-M35  SUZ-M50  SUZ-M60/71  PUZ-M100/125/140  PUZ-M200/250

* Some indoor units cannot be used with this unit.





R410A INDOOR UNIT		R410A OUTDOOR UNIT	
 4-way ceiling-cassette PLA-ZM EA PLA-M EA  Ceiling-concealed PEAD-M  Ceiling-suspended PCA-M  Professional Kitchen PCA-M HA  Wall-mounted PKA-M LA (L) PKA-M KA (L)  Floor-standing PSA-M  Ceiling-concealed PEA-M		Power Inverter  PUHZ-ZRP35/50  PUHZ-ZRP60/71  PUHZ-ZRP100/125/140/ 200/250	Standard Inverter  SUZ-KA35  SUZ-KA50/60/71  PUHZ-P100/125/140  PUHZ-P200/250

To confirm compatibility with the MXZ Series, refer to the MXZ Series page.

* Some indoor units cannot be used with this unit.

SELECT COMBINATION

Choose the installation pattern for the indoor units. (In the case of a multi-system, distribution piping is necessary, so please select the necessary piping as well.)

<div><h3>Single System</h3></div>	<div><h3>Simultaneous Multi-System</h3><div><div><h4>Twin</h4><p>Allows simultaneous operation of two indoor units on one floor.</p></div><div><h4>Triple</h4><p>Can cover a large-scale space or dispersed installation on the same floor.</p></div></div></div>	<div><h3>Quadruple</h3><p>Realises the optimum temperature distribution even in a large space.</p></div>
--	--	---

Connectable Combinations for Inverter Units

Outdoor Unit Capacity	Indoor Unit Capacity		
	Twin 50 : 50	Triple 33 : 33 : 33	Quadruple 25 : 25 : 25 : 25
71	35 × 2	—	—
100	50 × 2	—	—
125	60 × 2	—	—
140	71 × 2	50 × 3	—
200	100 × 2	60 × 3	50 × 4
250	125 × 2	71 × 3	60 × 4
Distribution Pipe	MSDD-50TR-E MSDD-50WR-E MSDD-50TR2-E2 MSDD-50WR2-E	MSDT-111R-E MSDT-111R3-E	MSDF-1111R-E MSDF-1111R2-E

Note: The distribution pipe listed is required for simultaneous multi-systems.

Power Inverter SERIES

Our Eco-conscious Power Inverter Series is designed to achieve industry-leading seasonal energy-efficiency through use of New R32 refrigerant and advanced technologies.



PUZ-ZM35/50VKA2



PUZ-ZM60/71VHA2




PUZ-ZM100/125/140V(Y)KA2
PUZ-ZM200/250YKA2

Industry-leading energy efficiency

Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 7.0 achieved for all capacity range.


Introduction of new R32 refrigerant reduces energy consumption and realises energy savings.

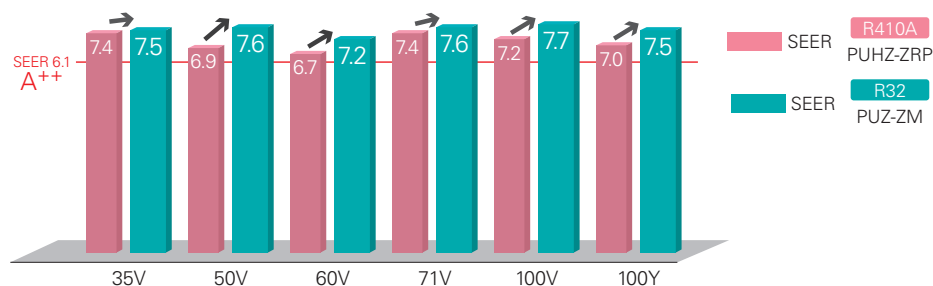

Longer piping (60/71/100/125/140/200/250)


Longer piping length realised for 60, 71, 100, 125, 140, 200 and 250 classes, widely increasing installation flexibility.

	Piping Length	
	R410A PUHZ-ZRP	R32 PUZ-ZM
35/50	50m	50m
60/71	50m	55m
100/125/140	75m	100m
200/250	100m	100m

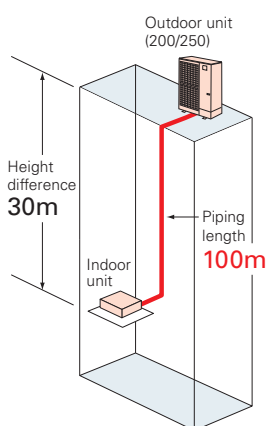

Rated heating capacity maintained down to -3°C*

Rated heating capacity maintained even when the outside temperature is down to -3°C. Stay warm even at times of cold weather.

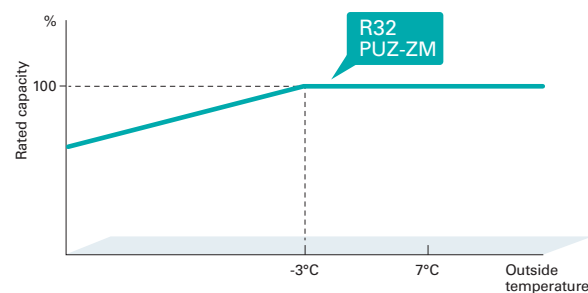

*PUZ-ZM35/50/60/71/100/125/140 only.


2+1 Back-up rotation*

The use of a three-refrigerant air conditioning system enables you to utilize the back-up, rotation, and cut-in functions. This allows you to implement effective risk management for added peace of mind.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Back-up Function

In the unlikely event that one of the units stops operation due to an abnormality, the standby unit immediately starts back-up operation. Being fully prepared for a failure guarantees that and operation is always available and gives you the confidence that your system will be reliable in any situation.

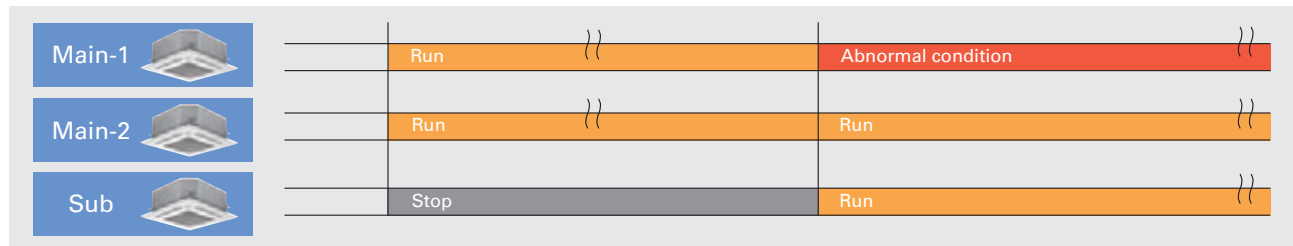


Rotation Function

A single remote controller is used to operate three-refrigerant air conditioning system in a rotation pattern. Reducing the burden on the equipment allows you to maintain a longer time between maintenance and increases product life.



Cut-in Function

If the actual room temperature greatly differs from the set temperature and two-refrigerant air conditioning system is insufficient, the standby unit starts operation to provide support.

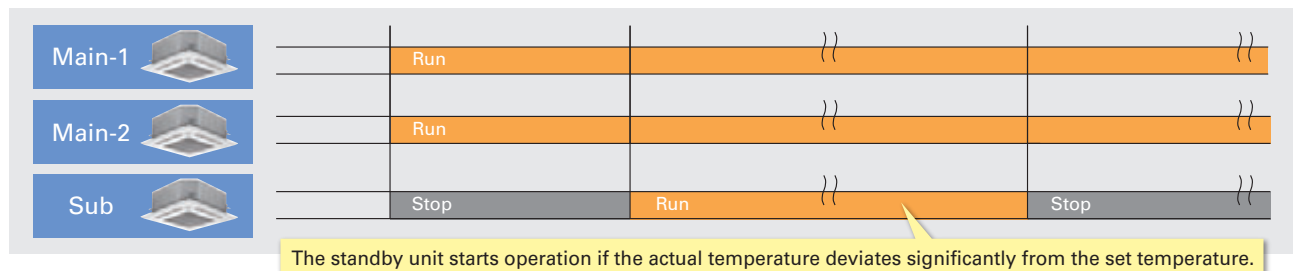


Extended cooling set temperature range*

In environments such as gyms where people do strenuous exercise, even if the room is cooled to an appropriate temperature, people may feel that it is hot, and they need a cooler air. To satisfy such demands, we have extended the lower limit of the cooling set temperature range from 19–30°C. to 14–30°C.

*Insulation kit (PAC-SK36HK-E) is required when indoor unit is PLA series.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

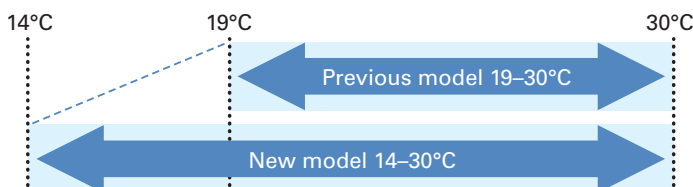

Display of model names and serial numbers*

The model names and serial numbers of the indoor/outdoor units that are connected to the MA smart remote controller can be automatically acquired and displayed through one simple operation. This eliminates the need to directly check each unit and helps with inquiries in the case of an abnormality.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

●Model name display (example)

Collect model names and S/N	
OU	PUZ-ZM200YKA2
IU1	PLA-ZM50EA2
IU2	PLA-ZM50EA2
IU3	PLA-ZM50EA2
IU4	PLA-ZM50EA2
Collect data: ✓	
—Address +	S/N

●Serial number display (example)

Collect model names and S/N	
OU	1ZU00001
IU1	1ZA00001
IU2	1ZA00002
IU3	1ZA00003
IU4	1ZA00004
Collect data: ✓	
—Address +	Model

Preliminary error history*

In addition to error history, the history of preliminary abnormalities can be displayed. The feature enables the unit status check during inspection and maintenance.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

●Error history (Sample)

Error history 1/4				
Error	Unt#	dd/mm/yy		
E0	0-1	21/10/20	PM12:34	
E0	0-1	20/12/20	AM 1:23	
E0	0-1	20/11/20	PM10:55	
E0	0-1	20/10/20	PM12:01	
Error history menu:				
▼ Page ▲		Delete		

●Preliminary error history (Sample)

Preliminary error hist. 1/8				
Error	Unt#	dd/mm/yy		
E0	0-1	21/10/20	PM12:34	
E0	0-1	20/12/20	AM 1:23	
E0	0-1	20/11/20	PM10:55	
E0	0-1	20/10/20	PM12:01	
Error history menu:				
▼ Page ▲		Delete		

Display of power consumption*

It is possible to measure, acquire, and display the amount of energy used by each air conditioning system.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

< Data Collection Period >

Time data: Every 30 minutes over the past month

Monthly/daily data: Monthly over the past 14 months

Energy consumption values are calculated from estimated power consumption values according to the operating conditions. They may vary from the actual power consumption values. Please note that the power consumption of optional parts is not included except in the case of optional parts that have their power supplied directly by the outdoor unit.

●Every 30 minutes (example)

Energy data				
2019- 1-	1234.5kWh	1/6		
0:30 123.4kWh	2:30 123.4kWh			
1:00 123.4kWh	3:00 123.4kWh			
1:30 123.4kWh	3:30 123.4kWh			
2:00 123.4kWh	4:00 123.4kWh			
Return:				
- Date +		▼ Page ▲		

●Daily (example)

Energy data				
2019- 1	123456.7kWh	1/4		
31 1234.5kWh	27 1234.5kWh			
30 1234.5kWh	26 1234.5kWh			
29 1234.5kWh	25 1234.5kWh			
28 1234.5kWh	24 1234.5kWh			
Return:				
▼ Page ▲				

●Monthly (example)

Energy data				
▶2019- 1	123456.7kWh	1/3		
2018-12	123456.7kWh			
2018-11	123456.7kWh			
2018-10	123456.7kWh			
2018- 9	123456.7kWh			
View daily data:				
▼ Cursor ▲				

Improved defrosting performance*


*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Avoiding Simultaneous Defrosting


When each of multiple units is in operation for heating in the same space, these may start defrosting at the same time, resulting in a drop in the room temperature. Therefore, we have developed a new function that controls up to four-refrigerant air conditioning system to avoid simultaneous defrosting. By ensuring that defrosting is only performed by one unit at a time, it is possible to minimize any decrease in room temperature.

Example System Configuration

Four sets controlled by a single remote controller

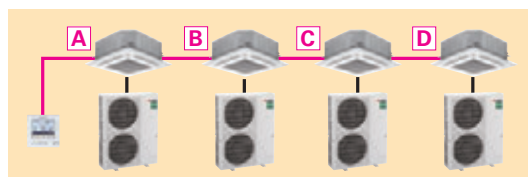


■When All Sets Are Controlled Together

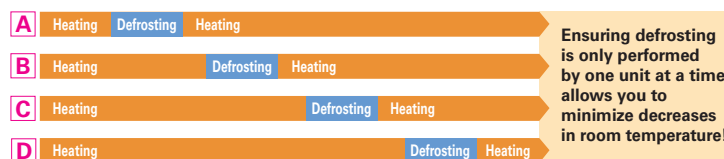

Defrosting When People Are Absent


The use of the 3D i-see sensor allows a more comfortable defrosting schedule. After a large amount of frost has built up, the system will switch to defrosting when the 3D i-see sensor detects that no people are present. By minimizing defrosting while people are in the room, there is a much lower chance of a temperature drop while the room is occupied.

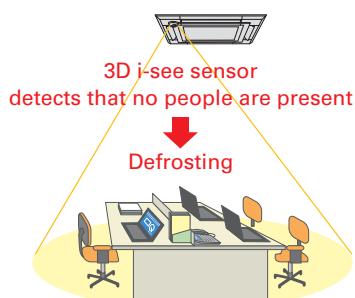

* Only compatible with 4-way cassette and 2x2 cassette models with an attached 3D i-see sensor panel. Even though people are present in the room, the defrosting process may start if all defrosting conditions are met.

Defrosting When Operation is Stopped

It takes a long time to start operation if there is an excess build-up of frost. Therefore, each unit is equipped with a control system where defrosting is performed immediately after operation is stopped when there is a large amount of frost. This allows heating to be quickly started the next day.

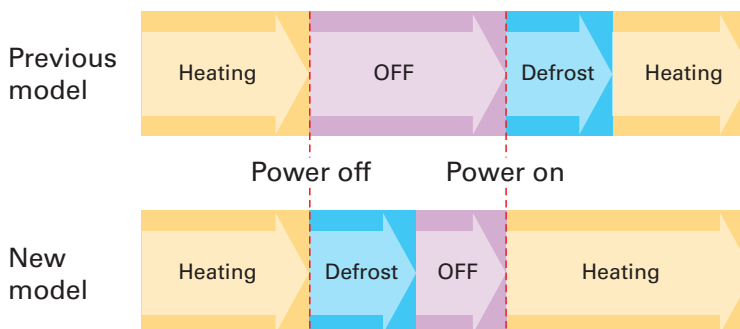

The power turns off after defrosting is complete and the system will start up smoothly the next time it is used.

Easier M-NET Adapter Installation

The optional M-NET adapter, which allows centralized control (M-NET control), is now easier to install. The redesigned mounting position significantly reduces the time and effort for installation.


Conventional Model

PAC-SJ96MA-E

Removed parts

The (1) top panel, (2) front panel, (3) service panel, and (4) electronics box need to be removed, and the connector must be temporarily unplugged.

M-NET adapter mounting position




New Model

PAC-SK15MA-E

Removed parts

There is no need to remove the (1) top panel, (2) service panel, (3) service plate, electronics box, nor temporarily unplug the connector.

M-NET adapter mounting position



Improved chargeless piping length ZM100/125/140

PUZ-ZM100/125/140V(Y)KA used to have a chargeless pipe length of 30 m. However, starting with the V(Y)KA2 model, this has been extended to 40 m. This allows it to be used for a wider range of applications without the need for additional charging of refrigerant.

	Maximum piping length	Chargeless piping length
PUZ-ZM 100V (Y)KA	100m	30m
PUZ-ZM 125V (Y)KA	100m	30m
PUZ-ZM 140V (Y)KA	100m	30m



	Maximum piping length	Chargeless piping length
PUZ-ZM 100V (Y)KA2	100m	40m
PUZ-ZM 125V (Y)KA2	100m	40m
PUZ-ZM 140V (Y)KA2	100m	40m

Utilizing IoT for Improved Convenience*

*Availability of IoT functions are depending on MELCloud version.


By connecting to a MAC-587IF-E Wi-Fi interface, it is possible to collect data and perform air conditioning control via MELCloud. In addition to basic functions such as turning the power on/off and setting the temperature, it is also possible to acquire data used for maintenance and inspection such as model names, serial numbers, and operation data.

[Basic Operation Functions]


- Operation on/off
- Temperature setting
- Operation mode
- Airflow speed
- Airflow direction etc...

[Data Collection and Display]


- Model name display
- Serial number display
- Collection of operation data
- Energy consumption display etc...

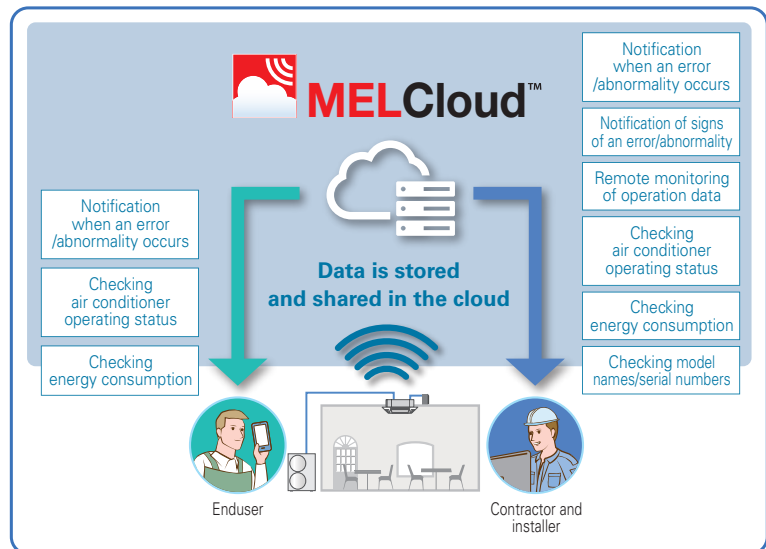

MELCloud System Configuration

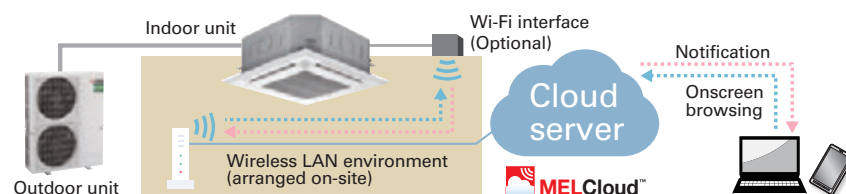

Wi-Fi Adapter (Optional) Installation

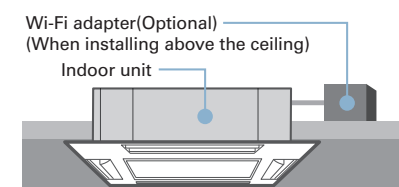

On-Site Installation and Configuration

① Wireless LAN adapter installation

Connect the wireless LAN adapter to the indoor unit PCB and install it above the ceiling.

② Wireless LAN adapter and router connection settings

③ Wireless LAN adapter and server connection settings

Collection of operation data

All the operation data required for maintenance and inspection can be collected in a simple step. This data can then be easily checked via MELcloud. This makes it easy to check the operating status data even in cases when it is difficult to do a visual inspection. This allows you to quickly identify any system malfunctions. This function also helps to improve the quality of installation work and shortening the time required for maintenance and inspection.

Operation data that can be collected (example)

- Compressor frequency ●Compressor operating current ●Outdoor discharge temperature
- Outdoor heat exchanger temperature ●Outdoor air temperature ●Compressor shell temperature
- Sub cool ●Discharge superheat ●Indoor inlet temperature ●Indoor heat exchanger temperature
- Total compressor operating time●Compressor operation count ●Indoor filter operating time

This operation data is strange...



*1 The total compressor operating time is displayed in units of 10 hours. The compressor operation count is displayed in units of 100.
*2 Indicates the elapsed time since a filter sign reset was performed.

Demand control

It is possible to control air-conditioners to appropriately operate according to the energy supply-demand adjustment by electric power companies and each electricity rate plan of end users.


e.g. <Peak cut control> It is possible to utilize an external demand signal to reduce power consumption during peak hours. By satisfying the need for reducing peak power consumption or shifting consumption to a non-peak period, we have increased the range of options for our customers.

Notification of potential abnormality

The comprehensive analysis of operating data allows the early detection of abnormalities in small functional parts by alerting the operator of any signs of abnormal behaviour. The recognition in advance of abnormalities in each unit further improves the ease of servicing and maintenance. Since this allows a countermeasure to be implemented before the abnormality requires the unit to be completely shut down, it is an effective method for maintaining the unit in its optimum condition.

[Abnormalities That Have Their Signs Monitored]

- Filter blockage ●Drain blockage ●Refrigerant leakage
- Heat exchanger blockage etc...

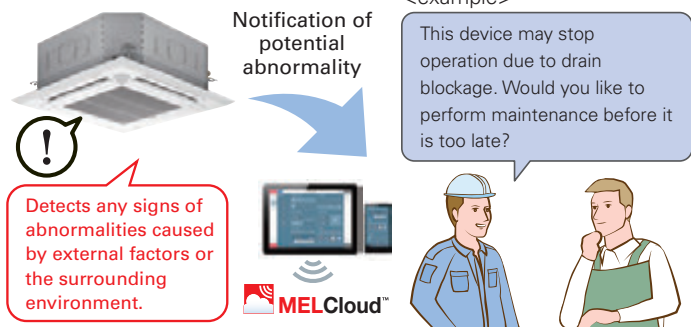

Standard Inverter SERIES

Our Standard Series become light and compact with greater energy-saving performance.



SUZ-M35VA

SUZ-M50VA


SUZ-M60/71VA

PUZ-M100/125/140V(Y)KA2

PUZ-M200/250YKA2

Improved energy efficiency


Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 6.6 achieved for all capacity range.

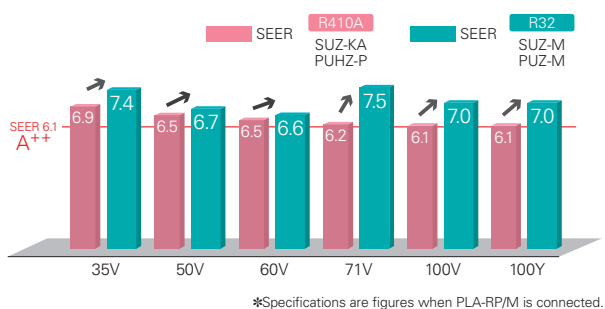

Longer piping (100/125/140/200/250)

Longer piping length realised for 100, 125, 140, 200 and 250 classes, widely increasing installation flexibility.

	Max. Piping Length	
	R410A SUZ-KA PUHZ-P	R32 SUZ-M PUZ-M
25/35	20m	20m
50/60/71	30m	30m
100	50m	55m
125/140	50m	65m
200/250	70m	70m



Light weight and compact size

Compact design fits into narrow outdoor unit space of condominiums and offices. Light weight design facilitates easy installation.



SUZ-KA50VA6

Height 880mm
Weight 54kg



SUZ-M50VA

Height 714mm **18% reduction**
Weight 41kg **24% reduction**



PUHZ-P140YHA2

Height 1,350mm
Weight 101kg




PUZ-M140YKA2


Height 981mm **27% reduction**
Weight 85kg **15% reduction**

Unobstructive, compact, and easy to hide from view

Conventional outdoor units may spoil the view. Due to its compact size, the new model can be installed in locations that previous model is not suitable.

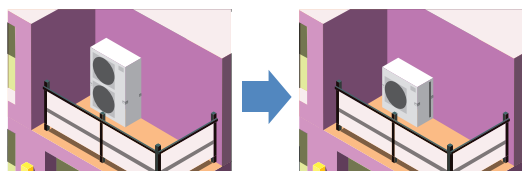

Easy transportation and installation

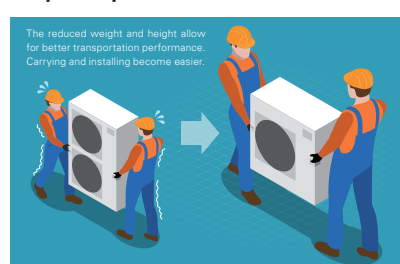

Transport efficiency improves thanks to its low height. The unit can even be transported by minivan.


2+1 Back-up rotation*

The use of a three-refrigerant air conditioning system enables you to utilize the back-up, rotation, and cut-in functions. This allows you to implement effective risk management for added peace of mind.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Back-up Function

In the unlikely event that one of the units stops operation due to an abnormality, the standby unit immediately starts back-up operation. Being fully prepared for a failure guarantees that and operation is always available and gives you the confidence that your system will be reliable in any situation.

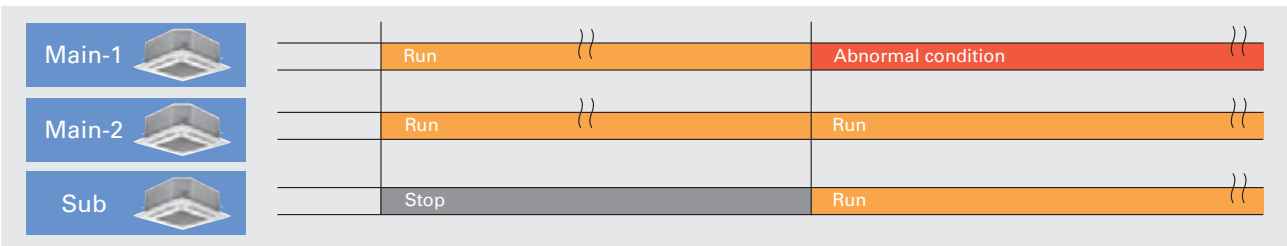


Rotation Function

A single remote controller is used to operate three-refrigerant air conditioning system in a rotation pattern. Reducing the burden on the equipment allows you to maintain a longer time between maintenance and increases product life.



Cut-in Function

If the actual room temperature greatly differs from the set temperature and two-refrigerant air conditioning system is insufficient, the standby unit starts operation to provide support.

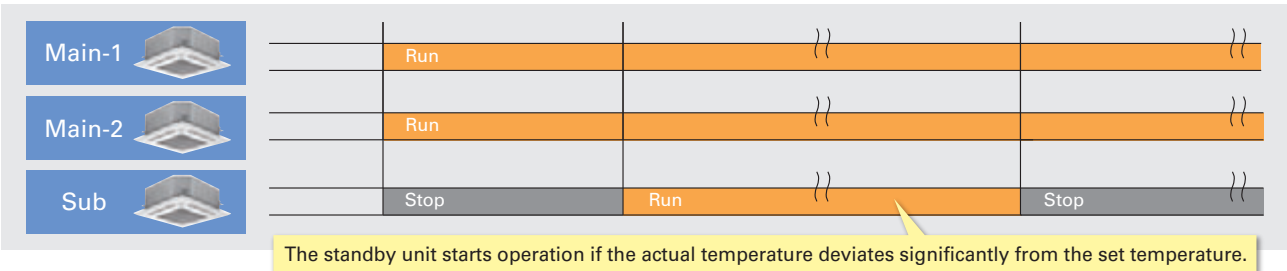


Extended cooling set temperature range*

In environments such as gyms where people do strenuous exercise, even if the room is cooled to an appropriate temperature, people may feel that it is hot, and they need a cooler air. To satisfy such demands, we have extended the lower limit of the cooling set temperature range from 19–30°C. to 14–30°C.

*Insulation kit (PAC-SK36HK-E) is required when indoor unit is PLA series.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

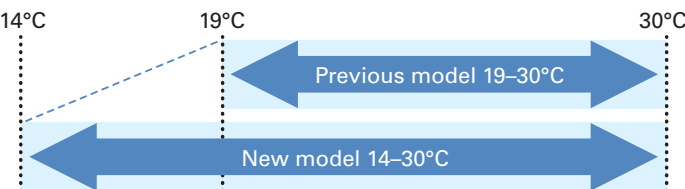

Display of model names and serial numbers*

The model names and serial numbers of the indoor/outdoor units that are connected to the MA smart remote controller can be automatically acquired and displayed through one simple operation. This eliminates the need to directly check each unit and helps with inquiries in the case of an abnormality.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

●Model name display (example)

Collect model names and S/N	
00 PUZ-ZM200YKA2	
IU1 PLA-ZM50EA2	
IU2 PLA-ZM50EA2	
IU3 PLA-ZM50EA2	
IU4 PLA-ZM50EA2	
Collect data: ✓	
-Address +	S/N

●Serial number display (example)

Collect model names and S/N	
00 1ZU00001	
IU1 1ZA00001	
IU2 1ZA00002	
IU3 1ZA00003	
IU4 1ZA00004	
Collect data: ✓	
-Address +	Model

Preliminary error history*

In addition to error history, the history of preliminary abnormalities can be displayed. The feature enables the unit status check during inspection and maintenance.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

●Error history (Sample)

Error history 1/4			
Error	Unt#	dd/mm/yy	
E0	0-1	21/10/20	PM12:34
E0	0-1	20/12/20	AM 1:23
E0	0-1	20/11/20	PM10:55
E0	0-1	20/10/20	PM12:01
Error history menu:			
▼ Page ▲		Delete	

●Preliminary error history (Sample)

Preliminary error hist. 1/8			
Error	Unt#	dd/mm/yy	
E0	0-1	21/10/20	PM12:34
E0	0-1	20/12/20	AM 1:23
E0	0-1	20/11/20	PM10:55
E0	0-1	20/10/20	PM12:01
Error history menu:			
▼ Page ▲		Delete	

Display of power consumption*

It is possible to measure, acquire, and display the amount of energy used by each air conditioning system.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

< Data Collection Period >

Time data: Every 30 minutes over the past month

Monthly/daily data: Monthly over the past 14 months

Energy consumption values are calculated from estimated power consumption values according to the operating conditions. They may vary from the actual power consumption values. Please note that the power consumption of optional parts is not included except in the case of optional parts that have their power supplied directly by the outdoor unit.

●Every 30 minutes (example)

Energy data			
2019- 1-	1234.5kWh	1/6	
0:30 123.4kWh	2:30 123.4kWh		
1:00 123.4kWh	3:00 123.4kWh		
1:30 123.4kWh	3:30 123.4kWh		
2:00 123.4kWh	4:00 123.4kWh		
Return:			
- Date +		▼ Page ▲	

●Daily (example)

Energy data			
2019- 1	123456.7kWh	1/4	
31 1234.5kWh	27 1234.5kWh		
30 1234.5kWh	26 1234.5kWh		
29 1234.5kWh	25 1234.5kWh		
28 1234.5kWh	24 1234.5kWh		
Return:			
▼ Page ▲			

●Monthly (example)

Energy data			
▶2019- 1	123456.7kWh	1/3	
2018- 12	123456.7kWh		
2018- 11	123456.7kWh		
2018- 10	123456.7kWh		
2018- 9	123456.7kWh		
View daily data:			
▼ Cursor ▲			


Improved defrosting performance*

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.


Avoiding Simultaneous Defrosting

When each of multiple units is in operation for heating in the same space, these may start defrosting at the same time, resulting in a drop in the room temperature. Therefore, we have developed a new function that controls up to four-refrigerant air conditioning system to avoid simultaneous defrosting. By ensuring that defrosting is only performed by one unit at a time, it is possible to minimize any decrease in room temperature.

Example System Configuration Four sets controlled by a single remote controller

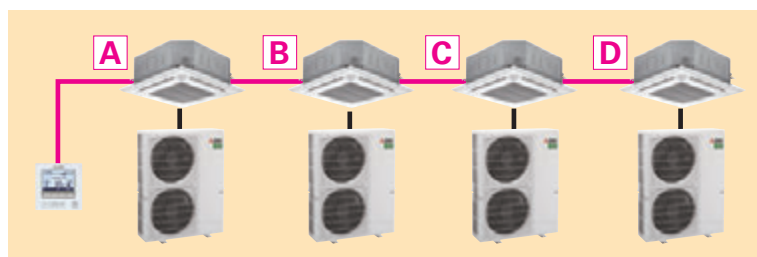

■When All Sets Are Controlled Together

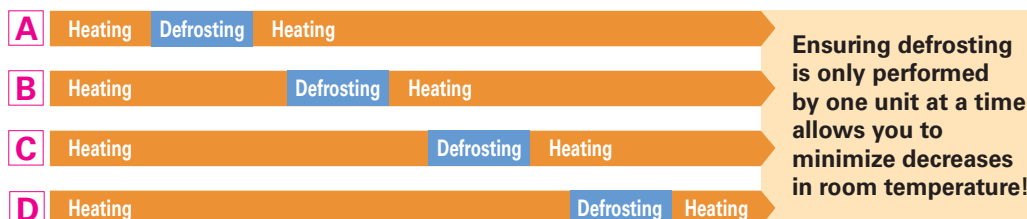

Utilizing IoT for Improved Convenience*

*Availability of IoT functions are depending on MELCloud version.


By connecting to a MAC-587IFE Wi-Fi interface, it is possible to collect data and perform air conditioning control via MELCloud. In addition to basic functions such as turning the power on/off and setting the temperature, it is also possible to acquire data used for maintenance and inspection such as model names, serial numbers, and operation data.

[Basic Operation Functions]


- Operation on/off ●Temperature setting
- Operation mode ●Airflow speed
- Airflow direction etc...

[Data Collection and Display]


- Model name display ●Serial number display
- Collection of operation data
- Energy consumption display etc...

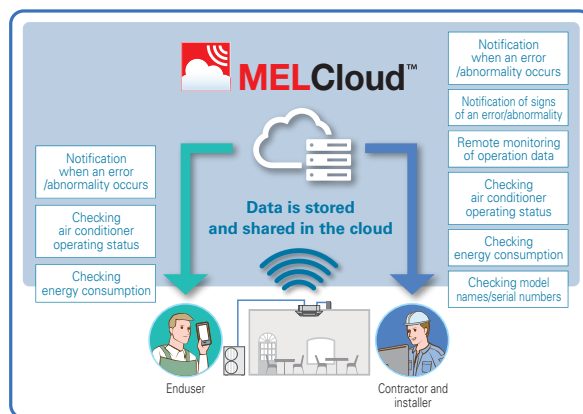

MELCloud System Configuration

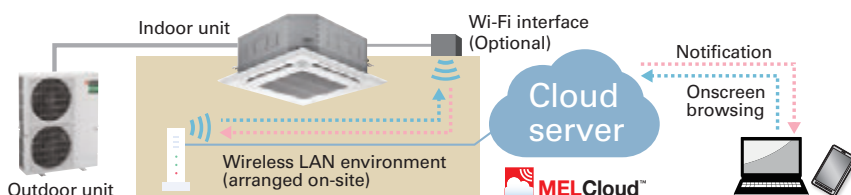

Wi-Fi Adapter (Optional) Installation

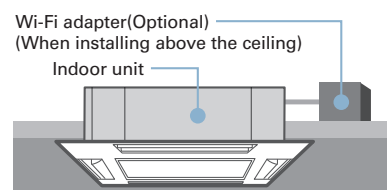

On-Site Installation and Configuration

①Wireless LAN adapter installation

Connect the wireless LAN adapter to the indoor unit PCB and install it above the ceiling.

②Wireless LAN adapter and router connection settings

③Wireless LAN adapter and server connection settings

Collection of operation data

All the operation data required for maintenance and inspection can be collected in a simple step. This data can then be easily checked via MELcloud. This makes it easy to check the operating status data even in cases when it is difficult to do a visual inspection. This allows you to quickly identify any system malfunctions. This function also helps to improve the quality of installation work and shortening the time required for maintenance and inspection.

Operation data that can be collected (example)

- Compressor frequency ●Compressor operating current ●Outdoor discharge temperature
- Outdoor heat exchanger temperature ●Outdoor air temperature ●Compressor shell temperature
- Sub cool ●Discharge superheat ●Indoor inlet temperature ●Indoor heat exchanger temperature
- Total compressor operating time ●Compressor operation count ●Indoor filter operating time

This operation data is strange...



*1 The total compressor operating time is displayed in units of 10 hours. The compressor operation count is displayed in units of 100.
*2 Indicates the elapsed time since a filter sign reset was performed.

Demand control

It is possible to control air-conditioners to appropriately operate according to the energy supply-demand adjustment by electric power companies and each electricity rate plan of end users.


e.g. <Peak cut control> It is possible to utilize an external demand signal to reduce power consumption during peak hours. By satisfying the need for reducing peak power consumption or shifting consumption to a non-peak period, we have increased the range of options for our customers.

Notification of potential abnormality

The comprehensive analysis of operating data allows the early detection of abnormalities in small functional parts by alerting the operator of any signs of abnormal behaviour. The recognition in advance of abnormalities in each unit further improves the ease of servicing and maintenance. Since this allows a countermeasure to be implemented before the abnormality requires the unit to be completely shut down, it is an effective method for maintaining the unit in its optimum condition.

[Abnormalities That Have Their Signs Monitored]

- Filter blockage ●Drain blockage ●Refrigerant leakage
- Heat exchanger blockage etc...

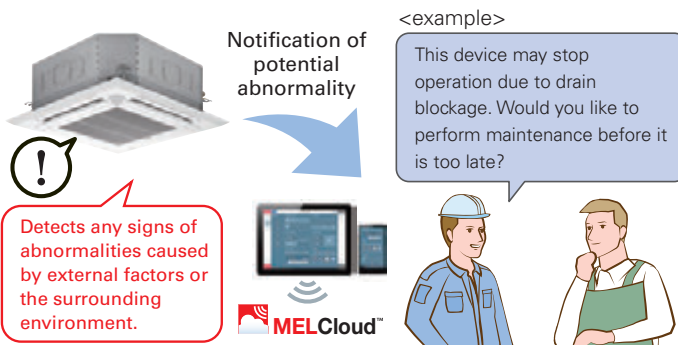

PLA SERIES

PLA-ZM35/50/60/71/100/125/140EA2

PLA-M35/50/60/71/100/125/140EA2

A complete line-up including deluxe units that offer added energy savings. The incorporation of "3D total flow" and the "3D i-see Sensor" enhances airflow distribution control, achieving an enhanced level of comfort throughout the room. The synergy of higher energy efficiency and more comfortable room environment results in the utmost user satisfaction.





Deluxe 4-way Cassette Line-up

For users seeking even further energy savings, Mitsubishi Electric now offers deluxe units (PLA-ZM) to complete the line-up of models in this series, from 35-140. Compared to the standard models (PLA-M), deluxe models provide additional energy savings, contributing to a significant reduction in electricity costs.

Indoor/Outdoor Unit Combinations


Line-up

Series	Model	35	50	60	71	100	125	140
R32 R410A	Deluxe 4-way Cassette (PLA-ZM)	●	●	●	●	●	●	●
R32 R410A	Standard 4-way Cassette (PLA-M)	●	●	●	●	●	●	●

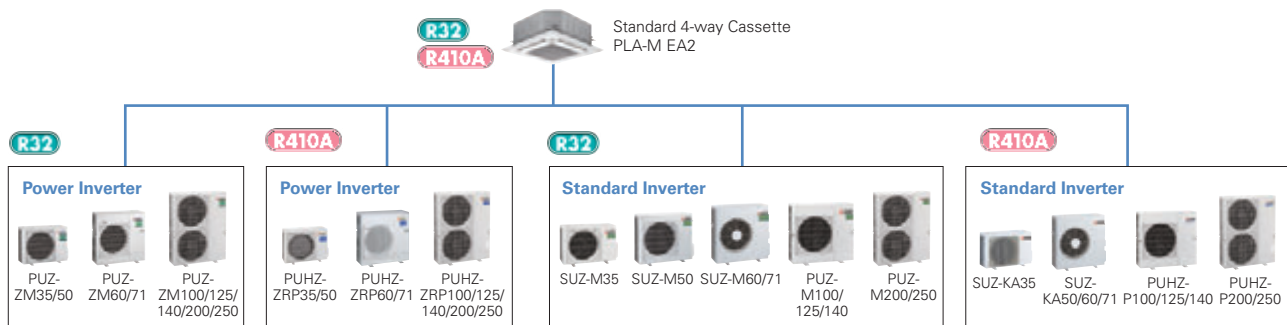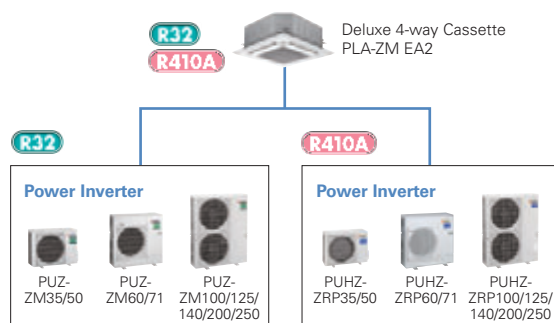

Industry-leading energy efficiency



Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 7.0 achieved for all capacity range. Introduction of new R32 refrigerant reduces energy consumption and realises energy savings.

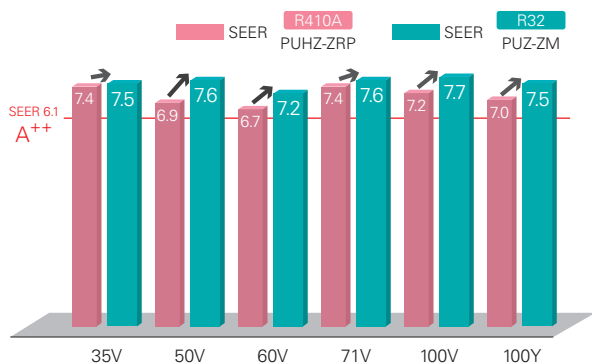

Horizontal Airflow

The new airflow control removes that uncomfortable drafty feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

[Horizontal airflow]
Model name: PLA-ZM140EA2
Ceiling height: 3.2m
Mode: Cooling

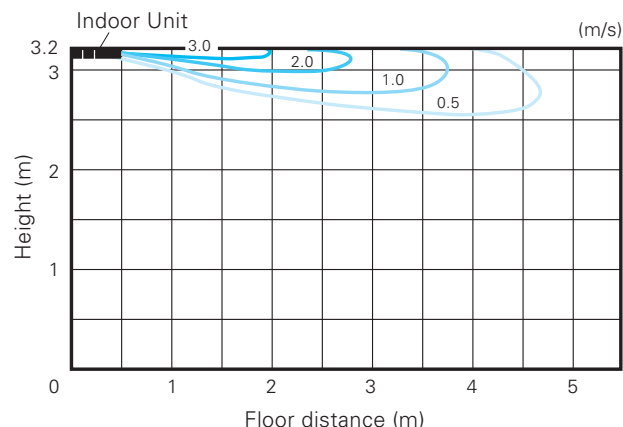

Automatic Grille Lowering Function (PLP-6EAJ, PLP-6EAJE)*

An automatic grille lowering function is available for easy filter maintenance. Special wired and wireless remote controllers can be used to lower the intake grille for maintenance.

*Auto elevation panel(PLP-6EAJ,PLP-6EAJE) cannot be used with Plasma Quad Connect(PAC-SK51FTE) and Insulation kit (PAC-SK36HK-E).



Grille Elevation Remote Controller
(comes with the automatic elevation panel)



Wired Remote Controller



Wireless Remote Controller



Easy Installation

Electrical box wiring

After reviewing the power supply terminal position in the electrical box, the structure was redesigned to improve connectivity. This has made previously complex wiring work easier.

■ Previous model (B Series)




■ New model (E Series)



Increased space for plumbing work

The top and bottom positions of the liquid and gas pipes have been reversed to allow the gas pipe work, which requires more effort, to be completed first. Further, through structural innovations related to the space around the pipes, the area where the spanner can be moved has been increased, thus improving liquid pipe work and enabling it to be completed smoothly.

■ Previous model (B Series)



■ New model (E Series)



Temporary hanging hook

The structure of the panel has been revised and is now equipped with a temporary hanging hook. This has improved work efficiency during panel installation.



No need to remove screws

Installation is possible without removing the screws for the corner panel and the control box, simply loosen them. This lowers the risk of losing screws.

■ Corner panel




■ Control box cover



Lightweight decorative panel

After reviewing the structure and materials, weight has been reduced approximately 20% compared to the previous model, reducing the burden of installation.



3D i-see Sensor for S & P SERIES

Detects number of people


3D i-see Sensor detects the number of people in the room and sets the air-conditioning power accordingly. This makes automatic power-saving operation possible in places where the number of people entering and exiting is large. Additionally, when the area is continuously unoccupied, the system switches to a more enhanced power-saving mode. Depending on the setting, it will save additional capacity or stop operation altogether.

Detects people's position



Once the position of a person is detected, the duct angle of the vane is automatically adjusted in that direction. Each vane can be independently set to "block wind" or "not block wind" according to taste.



Detects number of people



Detects people's position

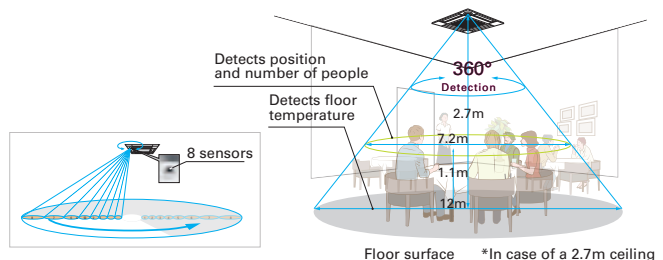

Detects number of people (3D i-see Sensor)

Room occupancy energy-saving mode

The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air-conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 1°C during both cooling and heating operation is saved. The temperature is controlled according to the number of people.

No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is in the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60min, air-conditioning power equivalent to 2°C during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.

No occupancy Auto-Off mode*

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10min, ranging from 60 to 180 min.

* When MA Remote Controller is used to control multiple refrigerant systems, "No occupancy Auto-Off mode" cannot be used.

Room occupancy energy save mode



1°C power savings

No occupancy energy save mode



2°C power savings

No occupancy Auto-Off mode




Auto-Off

*PAR-41MAA is required for each setting

Detects people's position (3D i-see Sensor)

Direct/Indirect settings*

Some people do not like the feel of wind, some want to be warm from head to toe. People's likes and dislikes vary. With the 3D i-see Sensor, it is possible to choose to block or not block to the wind for each vane.

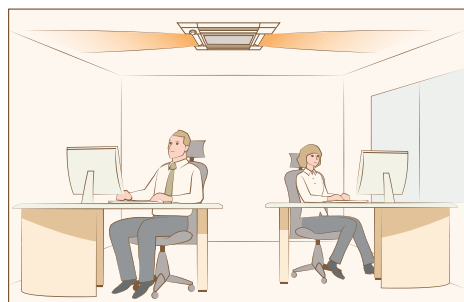

*PAR-41MAA or PAR-SL101A-E is required for each setting.


Seasonal airflow*

<When cooling>

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This clever function contributes to keeping a comfortable coolness.

<When heating>

The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is reused via circulation. When a pre-set temperature is reached the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.

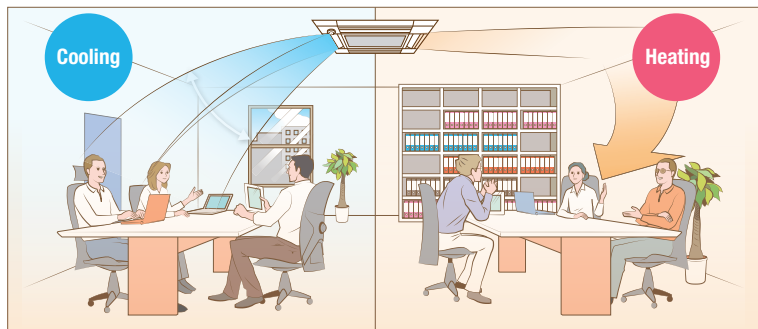


*PAR-41MAA is required for each setting.

3D Total Flow*

3D Total Flow is an innovative function. Our original 3D i-see sensor detects the temperature of the floor, and then the newly installed 3D Total Flow unit automatically controls the airflow in the left/right directions in a smart manner.

*3D Total Flow unit (PLP-U160ELR-E) cannot be used with Plasma Quad Connect (PAC-SK51TFE), Insulation kit (PAC-SK36HK-E), Shutter Plate (PAC-SJ37SP-E), Multi functional casement (PAC-SJ41TM-E) and High-efficiency filter element (PAC-SH59KF-E)

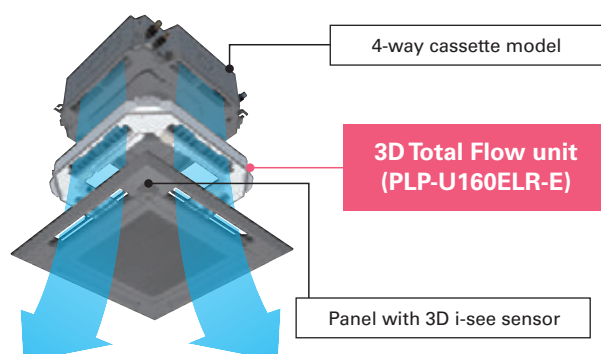

Horizontal louver (3D Total Flow)

In addition to the ability of conventional models to control airflow in the vertical direction, the adoption of a horizontal louver unit allows each outlet to blow air over a horizontal angle of 90 degrees. The combination of four outlets delivers 360° airflow control around the entire circumference. This now makes it possible to blow air in diagonal directions which eliminates temperature irregularities.



louvers can provide horizontal airflow control.





Swinging

Since airflow can be controlled in the horizontal and vertical directions, you can efficiently make the entire room comfortable.

Horizontal, vertical, and diagonal airflow delivered to every corner

The combination of the vertical vanes with the horizontal louver unit makes it possible to direct airflow in any direction. This quickly makes the entire room comfortable, even when diagonal airflow is necessary.


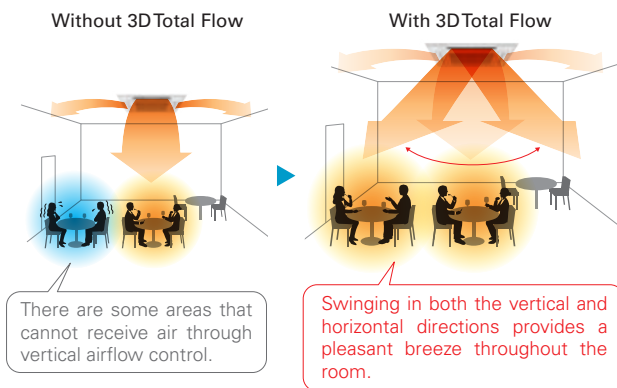


Indirect mode

When set to "Indirect" mode, the system detects the position of a person and maintains comfort while diverting airflow away from them.

Prevents direct airflow and keeps you comfortable

This function prevents people from being directly exposed to airflow while still ensuring comfort. The "Indirect" mode of 3D Total Flow keeps the downward airflow while avoiding direct blow to people, delivering a pleasant warmth.


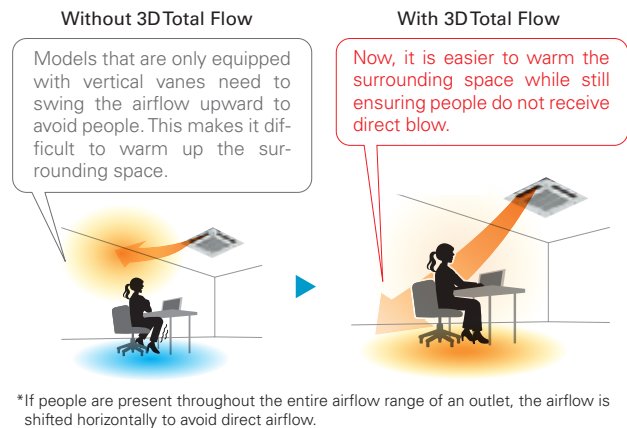


Targeting

The system can detect spaces with uneven temperatures and target them by sending air even if they are in a diagonal direction.

Detects and targets areas with uneven temperatures

3D i-see sensor detects areas with uneven temperatures, even if they are caused by the installation orientation of the air conditioner or the influence of strong sunlight. Efficient air conditioning is possible thanks to the ability to send focused airflow to such areas, even those in a diagonal position.

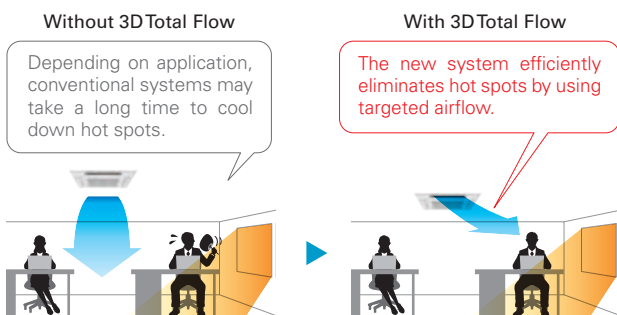


Direct mode

When set to "Direct" mode, the system detects the position and diverts airflow towards wherever they are located.

Delivers airflow even in diagonal directions


You can freely turn on "Direct" mode depending on personal preference. This allows for air conditioning in diagonal directions which was difficult for models that could only swing the airflow up and down. This feature is perfect for when you come back home on a hot day.

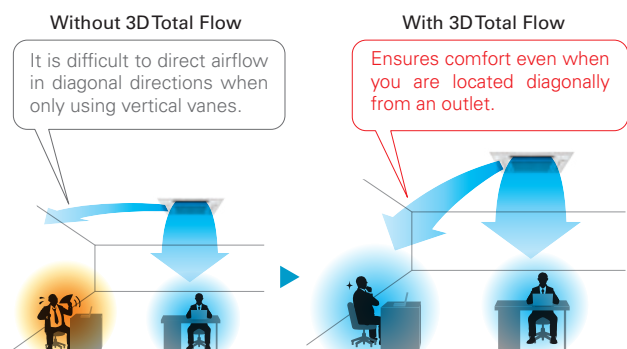

Connectable to *Plasma Quad Connect* *

The optional Plasma Quad Connect PAC-SK51FTE can be installed on the indoor units.

*Plasma Quad Connect(PAC-SK51FTE) cannot be used with PLP-U160ELR-E(3D Total Flow unit), Insulation kit (PAC-SK36HK-E), Auto elevation panel(PLP-6EAJ, PLP-6EAJE), Multi functional casement(PAC-SJ41TM-E) and High-efficiency filter element(PAC-SH59KF-E).



SERIES SELECTION

Power Inverter Series

Indoor Unit

R32
R410A



Panel

PLA-ZM35/50/60/71/100/125/140EA2

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EALM2	✓	✓		
PLP-6EAJ*	✓			✓
PLP-6EAJE*	✓	✓		✓
PLP-6EALM2	✓	✓	✓	
PLP-6EALME2	✓	✓	✓	

*Auto elevation panel(PLP-6EAJ,PLP-6EAJE) cannot be used with Plasma Quad Connect(PAC-SK51FT-E) and Insulation kit (PAC-SK36HK-E).

Outdoor Unit

R32

For Single



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71



PUZ-ZM100/125/140/200/250

3D Total Flow Unit

PLP-U160ELR-E
(optional)



Remote Controller



Optional



Optional



Optional



* Enclosed in
PLP-6EALM2/PLP-6EALME2

PLA-ZM EA2 Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E				MSDD-50WR2-E		MSDT-111R3-E			MSDF-1111R2-E	

SERIES SELECTION

Standard Inverter Series

Indoor Unit

R32
R410A



Panel

PLA-M35/50/60/71/100/125/140EA2

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EALM2	✓	✓		
PLP-6EAJ*	✓			✓
PLP-6EAJE*	✓	✓		✓
PLP-6EALM2	✓	✓	✓	
PLP-6EALME2	✓	✓	✓	

*Auto elevation panel(PLP-6EAJ,PLP-6EAJE) cannot be used with Plasma Quad Connect(PAC-SK51FT-E) and Insulation kit (PAC-SK36HK-E).

Outdoor Unit

R32

For Single



SUZ-M35



SUZ-M50




SUZ-M60/71




PUZ-M100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140



PUZ-M200/250

3D Total Flow Unit

PLP-U160ELR-E*
(optional)

*SUZ combination is
not available.



Remote Controller



Optional



Optional



Optional



* Enclosed in
PLP-6EALM2/PLP-6EALME2

PLA-M EA2 Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (SUZ & PUZ-M)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	–	–	–	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
Distribution Pipe		–	–	–	–	–	–	–	–	–	–	MSDD-50TR2-E			MSDD-50WR2-E		MSDT-111R3-E			MSDF-1111R2-E	

PLA-ZM SERIES

POWER INVERTER



Type	Inverter Heat Pump																																	
Indoor Unit				PLA-M35EA2	PLA-M50EA2	PLA-M60EA2	PLA-M71EA2	PLA-M100EA2	PLA-M125EA2	PLA-M125EA2	PLA-M140EA2	PLA-M140EA2																						
Outdoor Unit				PUZ-M35VKA2	PUZ-M50VKA2	PUZ-M60VHA2	PUZ-M71VHA2	PUZ-M100VKA2	PUZ-M125VKA2	PUZ-M125VKA2	PUZ-M140VKA2	PUZ-M140VKA2																						
Refrigerant (*)				R32																														
Power Supply	Source				Outdoor power supply																													
Cooling	Outdoor(V/Phase/Hz)				VKA-VHA:230/Single/50, YKA:400/Three/50																													
	Capacity	Rated		kW	3.6	5.0	6.1	7.1	9.5	12.5	12.5	13.4	13.4																					
		Min-Max		kW	1.6 ~ 4.5	2.3 ~ 5.6	2.7 ~ 6.5	3.3 ~ 8.1	4.9 ~ 11.4	5.5 ~ 14.0	5.5 ~ 14.0	6.2 ~ 15.0	6.2 ~ 15.0																					
	Total Input	Rated		kW	0.705	1.106	1.452	1.651	2.159	2.159	3.378	3.378	3.722	3.722																				
	EER				5.10	4.52	4.20	4.30	4.40	4.40	3.70	3.70	3.60	3.60																				
	Design load			kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—																				
	Annual electricity consumption (*)			kWh/a	168	230	296	327	431	442	—	—	—	—																				
	SEER (*)				7.5	7.6	7.2	7.6	7.7	7.5	—	—	—	—																				
		Energy efficiency class			A++	A++	A++	A++	A++	A++	—	—	—	—																				
	Heating	Capacity	Rated		kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0																			
		Min-Max		kW	1.6 ~ 5.2	2.5 ~ 7.3	2.8 ~ 8.2	3.5 ~ 10.2	4.5 ~ 14.0	4.5 ~ 14.0	5.0 ~ 16.0	5.0 ~ 16.0	5.7 ~ 18.0	5.7 ~ 18.0																				
Total Input		Rated		kW	0.820	1.363	1.707	1.818	2.604	2.604	3.674	3.674	4.312	4.312																				
COP					5.00	4.40	4.10	4.40	4.30	4.30	3.81	3.81	3.71	3.71																				
Design load				kW	2.5	3.8	4.4	4.7	7.8	7.8	—	—	—	—																				
Declared Capacity		at reference design temperature		kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—																				
		at bivalent temperature		kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—																				
		at operation limit temperature		kW	2.1 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—																				
Back up heating capacity				kW	0.0	0.0	0.0	0.0	0.0	0.0	—	—	—	—																				
Annual electricity consumption (*)				kWh/a	744	1086	1339	1371	2271	2272	—	—	—	—																				
SCOP (*)				4.7	4.9	4.6	4.8	4.8	4.8	—	—	—	—																					
	Energy efficiency class			A++	A++	A++	A++	A++	A++	—	—	—	—																					
Operating Current(Max)			A	13.2	13.2	19.2	19.3	20.5	8.5	27.0	9.5	30.7	12.5																					
Indoor Unit	Input [cooling / Heating]	Rated		kW	0.03 / 0.03	0.03 / 0.03	0.03 / 0.03	0.05 / 0.05	0.07 / 0.07	0.07 / 0.07	0.08 / 0.08	0.08 / 0.08	0.10 / 0.10	0.10 / 0.10																				
	Operating Current(Max)			A	0.21	0.22	0.22	0.34	0.47	0.47	0.52	0.52	0.66	0.66																				
	Dimensions	H*W*D		mm	258-840-840 <40-950-950>			298-840-840 <40-950-950>																										
	Weight			kg	21 <5>	21 <5>	21 <5>	24 <5>	26 <5>	26 <5>	26 <5>	26 <5>	26 <5>	26 <5>																				
	Air Volume (Lo-Mi2-Mi1-Hi)			m³/min	11-13-15-16	12-14-16-18	12-14-16-18	17-19-21-23	19-22-25-28	19-22-25-28	21-24-26-29	21-24-26-29	24-26-29-32	24-26-29-32																				
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)			dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-32-36	31-34-37-40	31-34-37-40	33-36-39-41	33-36-39-41	36-39-42-44	36-39-42-44																				
	Sound Level (PWL)			dB(A)	51	54	54	57	61	61	62	62	65	65																				
	Dimensions	H*W*D		mm	630-809-300			630-809-300			943-950-330(+25)			943-950-330(+25)			1338-1050-330(+40)			1338-1050-330(+40)														
	Weight			kg	46			46			67			67			105			111			105			114			105			118		
	Air Volume	Cooling		m³/min	45			45			55			55			110			110			120			120			120			120		
	Heating		m³/min	45			45			55			55			110			110			120			120			120			120			
Sound Level (SPL)	Cooling		dB(A)	44			44			47			47			49			49			50			50			50			50			
	Heating		dB(A)	46			46			49			49			51			51			52			52			52			52			
Sound Level (PWL)	Cooling		dB(A)	65			65			67			67			69			69			70			70			70			70			
Operating Current(Max)			A	13			13			19			19			20			8			26.5			9			30			11.8			
Breaker Size			A	16			16			25			25			32			16			32			16			40			16			
Ext.Piping	Diameter**	Liquid/Gas		mm	6.35 / 12.7			6.35 / 12.7			9.52 / 15.88			9.52 / 15.88			9.52 / 15.88			9.52 / 15.88			9.52 / 15.88			9.52 / 15.88			9.52 / 15.88					
	Max.Length	Out-In		m	50			50			55			55			100			100			100			100			100					
	Max.Height	Out-In		m	30			30			30			30			30			30			30			30			30					
Guaranteed Operating Range (Outdoor)	Cooling**		°C	-15 ~ +46			-15 ~ +46			-15 ~ +46			-15 ~ +46			-15 ~ +46			-15 ~ +46			-15 ~ +46			-15 ~ +46			-15 ~ +46						
	Heating		°C	-11 ~ +21			-11 ~ +21			-20 ~ +21			-20 ~ +21			-20 ~ +21			-20 ~ +21			-20 ~ +21			-20 ~ +21			-20 ~ +21						

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 560. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 560 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PLA-M SERIES

STANDARD INVERTER



Type				Inverter Heat Pump										
Indoor Unit				PLA-M35EA2	PLA-M50EA2	PLA-M60EA2	PLA-M71EA2	PLA-M100EA2	PLA-M100EA2	PLA-M125EA2	PLA-M125EA2	PLA-M140EA2	PLA-M140EA2	
Outdoor Unit				PUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA2	PUZ-M100VKA2	PUZ-M125VKA2	PUZ-M125VKA2	PUZ-M140VKA2	PUZ-M140VKA2	
Refrigerant ^(*)				R32										
Power Supply				Outdoor power supply										
Source Outdoor(V/Phase/Hz)				VA-VKA: 230/Single/50, YKA:400/Three/50										
Cooling	Capacity	Rated	kW	3.6	5.5	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4	
		Min-Max	kW	0.8 - 3.9	1.2 - 5.6	1.6 - 6.3	2.2 - 8.1	4.0 - 10.6	4.0 - 10.6	5.8 - 13.0	5.8 - 13.0	5.8 - 14.1	5.8 - 14.1	
		Rated	kW	0.900	1.617	1.848	1.918	2.714	2.714	4.019	4.019	4.962	4.962	
	EER			4.00	3.40	3.30	3.70	3.50	3.50	3.01	3.01	2.70	2.70	
	Design load			kW	3.6	5.5	6.1	7.1	9.5	9.5	—	—	—	—
	Annual electricity consumption ^{(*)2}			kWh/a	170	285	320	331	475	475	—	—	—	—
	SEER ^{(*)4}				7.4	6.7	6.6	7.5	7.0	7.0	—	—	—	—
	Energy efficiency class				A++	A++	A++	A++	A++	A++	—	—	—	—
Heating	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0	
		Min-Max	kW	1.0 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	2.8 - 12.5	2.8 - 12.5	4.1 - 15.0	4.1 - 15.0	4.2 - 15.8	4.2 - 15.8	
	Total Input	Rated	kW	0.976	1.734	1.842	2.216	3.018	3.018	3.638	3.638	4.398	4.398	
		COP		4.20	3.46	3.80	3.61	3.71	3.71	3.71	3.71	3.41	3.41	
	Design load		kW	2.6	4.3	4.6	5.8	8.0	8.0	—	—	—	—	
		Declared Capacity	at reference design temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	—	—	—	—
	at bivalent temperature		kW	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	—	—	—	—	
	at operation limit temperature		kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	—	—	—	—	
	Back up heating capacity			kW	0.3	0.5	0.5	0.6	2.0	2.0	—	—	—	—
	Annual electricity consumption ^{(*)2}			kWh/a	774	1458	1459	1798	2406	2406	—	—	—	—
SCOP ^{(*)4}				4.7	4.1	4.4	4.5	4.6	4.6	—	—	—	—	
Energy efficiency class				A++	A+	A+	A+	A++	A++	—	—	—	—	
Operating Current(Max)				A	8.7	13.7	15.0	15.1	20.5	12	27.2	30.7	12.2	
Indoor Unit	Input [cooling / Heating]		Rated	kW	0.03 / 0.03	0.03 / 0.03	0.03 / 0.03	0.04 / 0.04	0.07 / 0.07	0.07 / 0.07	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10	
	Operating Current(Max)		A	0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66	0.66	
	Dimensions		H*W*D	mm	258-840-840 <40-950-950>			298-840-840 <40-950-950>						
	Weight		kg	19 <5>	19 <5>	21 <5>	21 <5>	24 <5>	24 <5>	26 <5>	26 <5>	26 <5>	26 <5>	
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	11-13-15-16	12-14-16-18	12-14-16-18	17-19-21-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31	24-26-29-32	24-26-29-32	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	29-30-32-34	31-34-37-40	31-34-37-40	33-37-41-44	33-37-41-44	36-39-42-44	36-39-42-44	
	Sound Level (PWL)		dB(A)	51	54	54	56	61	61	65	65	65	65	
	Dimensions		H*W*D	mm	550-800-285			880-840-330			981-1050-330(+40)			
Outdoor Unit	Weight		kg	35	41	54	55	76	78	84	85	84	85	
	Air Volume	Cooling	m³/min	34.3	45.8	50.1	50.1	79	79	86	86	86	86	
		Heating	m³/min	32.7	43.7	50.1	50.1	79	79	92	92	92	92	
	Sound Level (SPL)	Cooling	dB(A)	48	48	49	49	51	51	54	54	55	55	
		Heating	dB(A)	48	49	51	51	54	54	56	56	57	57	
	Sound Level (PWL)	Cooling	dB(A)	59	64	65	66	70	70	72	72	73	73	
		Heating	dB(A)	59	64	65	66	70	70	72	72	73	73	
	Operating Current(Max)			A	8.5	13.5	14.8	14.8	20	11.5	26.5	11.5	30	11.5
	Breaker Size			A	10	20	20	20	32	16	32	16	40	16
	Ext.Piping	Diameter ^{(*)5}		Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Max.Length		Out-In	m	20	30	30	30	55	55	65	65	65		
Max.Height		Out-In	m	12	30	30	30	30	30	30	30	30		
Cooling ^{(*)9}		°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46		
Guaranteed Operating Range (Outdoor)				Heating ^{(*)9}	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

PLA-M SERIES

POWER INVERTER



Type				Inverter Heat Pump									
Indoor Unit				PLA-M35EA2	PLA-M50EA2	PLA-M60EA2	PLA-M71EA2	PLA-M100EA2	PLA-M100EA2	PLA-M125EA2	PLA-M125EA2	PLA-M140EA2	PLA-M140EA2
Outdoor Unit				PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM100VKA2	PUZ-ZM125VKA2	PUZ-ZM125VKA2	PUZ-ZM140VKA2	PUZ-ZM140VKA2
Refrigerant ⁽¹⁾				R32									
Power Supply	Source	Outdoor power supply											
	Outdoor(V/Phase/Hz)	VKA・VHA:230/Single/50, YKA:400/Three/50											
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
	Total Input	Rated	kW	0.751	1.175	1.523	1.716	2.209	2.209	3.396	3.396	3.746	3.746
	EER			4.79	4.25	4.00	4.14	4.30	4.30	3.68	3.68	3.58	3.58
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—
	Annual electricity consumption ⁽²⁾		kWh/a	172	234	301	336	437	448	—	—	—	—
Heating (Average Season)	SEER ⁽⁴⁾			7.3	7.4	7.1	7.4	7.6	7.4	—	—	—	—
	Energy efficiency class			A++	A++	A++	A++	A++	A++	—	—	—	—
	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
		Min-Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
	Total Input	Rated	kW	0.890	1.581	1.863	2.014	2.685	2.685	3.773	3.773	4.365	4.365
	COP			4.61	3.79	3.76	3.97	4.17	4.17	3.71	3.71	3.67	3.67
	Design load		kW	2.5	3.8	4.4	4.7	7.8	7.8	—	—	—	—
	Declared Capacity	at reference design temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—
		at bivalent temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—
		at operation limit temperature	kW	2.1 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—
Back up heating capacity		kW	0.0	0.0	0.0	0.0	0.0	0.0	—	—	—	—	
Annual electricity consumption ⁽²⁾		kWh/a	798	1187	1422	1429	2496	2497	—	—	—	—	
SCOP ⁽⁴⁾			4.3	4.4	4.3	4.6	4.3	4.3	—	—	—	—	
Energy efficiency class			A+	A+	A+	A++	A+	A+	—	—	—	—	
Operating Current(Max)		A	13.2	13.2	19.2	19.3	20.5	8.5	27.2	9.7	30.7	12.5	
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.03 / 0.03	0.03 / 0.03	0.03 / 0.03	0.04 / 0.04	0.07 / 0.07	0.07 / 0.07	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
	Operating Current(Max)		A	0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66	0.66
	Dimensions	H*W*D	mm	258-840-840			<40-950-950>			298-840-840			<40-950-950>
	Weight		kg	19 <5>	19 <5>	21 <5>	21 <5>	24 <5>	24 <5>	26 <5>	26 <5>	26 <5>	26 <5>
	Air Volume (Lo-Mid-Hi)		m³/min	11-13-15-16	12-14-16-18	12-14-16-18	14-17-19-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31	24-26-29-32	24-26-29-32
	Sound Level (Lo-Mid-Hi) (SPL)		dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-32-34	31-34-37-40	31-34-37-40	33-37-41-44	33-37-41-44	36-39-42-44	36-39-42-44
Outdoor Unit	Sound Level (PWL)		dB(A)	51	54	54	56	61	61	65	65	65	65
	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)	943-950-330(+25)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)
	Weight		kg	46	46	67	67	105	111	105	114	105	118
	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120	120
		Heating	m³/min	45	45	55	55	110	110	120	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50
		Heating	dB(A)	46	46	49	49	51	51	52	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70
	Operating Current(Max)		A	13	13	19	19	20	8	26.5	9	30	11.8
	Breaker Size		A	16	16	25	25	32	16	32	16	40	16
Ext.Piping	Diameter ⁽³⁾	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	50	50	55	55	100	100	100	100	100	100
	Max.Height	Out-In	m	30	30	30	30	30	30	30	30	30	30
Guaranteed Operating Range (Outdoor)			Cooling ⁽²⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
			Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

SERIES SELECTION

Power Inverter Series

Indoor Unit

R32
R410A



PLA-ZM35/50/60/71/100/125/140EA2

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EALE	✓	✓		
PLP-6EAJ	✓			✓
PLP-6EAJE	✓	✓		✓
PLP-6EALM2	✓		✓	
PLP-6EALME2	✓	✓	✓	

Outdoor Unit

R410A


For Single



PUHZ-ZRP35/50



PUHZ-ZRP60/71




PUHZ-ZRP100/125/140

R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-ZRP71



PUHZ-ZRP100/125/140/200/250

Remote Controller



Optional



Optional



Optional



* Enclosed in PLP-6EALM2/PLP-6EALME2

PLA-ZM EA2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
Distribution Pipe		—	—	—	—	—	—	—	—	—	MSDD-50TR-E			MSDD-50WR-E			MSDT-111R-E			MSDF-111R-E	

SERIES SELECTION

Standard Inverter Series

Indoor Unit

R410A



PLA-M35/50/60/71/100/125/140EA2

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EALE	✓	✓		
PLP-6EAJ	✓			✓
PLP-6EAJE	✓	✓		✓
PLP-6EALM2	✓		✓	
PLP-6EALME2	✓	✓	✓	

Outdoor Unit

R410A

For Single



SUZ-KA35



SUZ-KA50/60/71




PUHZ-P100/125/140

R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-P100/125/140



PUHZ-P200/250

Remote Controller



Optional



Optional



Optional



* Enclosed in PLP-6EALM2/PLP-6EALME2

PLA-M EA2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (SUZ & PUHZ-P)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E			MSDD-50WR-E		MSDT-111R-E			MSDF-1111R-E	

PLA-ZM SERIES

POWER INVERTER



Type		Inverter Heat Pump											
Indoor Unit		PLA-M35EA2	PLA-M50EA2	PLA-M60EA2	PLA-M71EA2	PLA-M100EA2	PLA-M125EA2	PLA-M125EA2	PLA-M140EA2	PLA-M140EA2	PLA-M140EA2	PLA-M140EA2	PLA-M140EA2
Outdoor Unit		PUHZ-ZRP35KA2	PUHZ-ZRP50KA2	PUHZ-ZRP60VHA2	PUHZ-ZRP71VHA2	PUHZ-ZRP100KA3	PUHZ-ZRP125KA3	PUHZ-ZRP125KA3	PUHZ-ZRP140KA3	PUHZ-ZRP140KA3	PUHZ-ZRP140KA3	PUHZ-ZRP140KA3	PUHZ-ZRP140KA3
Refrigerant ⁽¹⁾		R410A											
Power Supply		Outdoor power supply											
Cooling		VKA-VHA:230/Single/50, YKA:400/Three/50											
Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	12.5	12.5	13.4	13.4	13.4	13.4
	Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0	6.2 - 15.0
	Total Input	kW	0.782	1.330	1.660	1.790	2.200	2.200	3.846	3.846	4.364	4.364	4.364
	EER		4.60	3.75	3.66	3.95	4.32	4.32	3.25	3.25	3.07	3.07	3.07
	Design load	kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—	—
Heating	Annual electricity consumption ⁽²⁾	kWh/a	170	253	318	335	461	472	—	—	—	—	—
	SEER ⁽⁴⁾		7.4	6.9	6.7	7.4	7.2	7.0	—	—	—	—	—
	Energy efficiency class		A++	A++	A++	A++	A++	A++	—	—	—	—	—
	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0	16.0
	Min-Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0	5.7 - 18.0
COP	Rated	kW	0.850	1.550	1.890	1.900	2.600	2.600	3.674	3.674	4.848	4.848	4.848
	Design load	kW	4.2	3.85	3.70	4.20	4.31	4.31	3.81	3.81	3.30	3.30	3.30
	Declared Capacity	kW	2.5	3.8	4.4	4.7	7.8	7.8	—	—	—	—	—
	at reference design temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—	—
	at bivalent temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—	—
Back up heating capacity	at operation limit temperature	kW	2.1 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—	—
	Annual electricity consumption ⁽²⁾	kWh/a	713	1108	1335	1337	2223	2224	—	—	—	—	—
	SCOP ⁽⁴⁾		4.9	4.8	4.6	4.9	4.9	4.9	—	—	—	—	—
	Energy efficiency class		A++	A++	A++	A++	A++	A++	—	—	—	—	—
	Rated	kW	13.2	13.2	19.2	19.3	27.0	27.0	8.5	27.0	10.0	28.7	13.7
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.03 / 0.03	0.03 / 0.03	0.03 / 0.03	0.05 / 0.05	0.07 / 0.07	0.07 / 0.07	0.08 / 0.08	0.08 / 0.08	0.10 / 0.10	0.10 / 0.10
	Operating Current(Max)	A	0.21	0.22	0.22	0.34	0.47	0.47	0.52	0.52	0.66	0.66	0.66
	Dimensions	H*W*D	mm	258-840-840	<40-950-950>	21 <5>	24 <5>	26 <5>	26 <5>	26 <5>	26 <5>	26 <5>	26 <5>
	Weight	kg	21 <5>	21 <5>	21 <5>	24 <5>	26 <5>	26 <5>	26 <5>	26 <5>	26 <5>	26 <5>	26 <5>
	Air Volume (Lo-Mi2-Mi1-Hi)	m³/min	11-13-15-16	12-14-16-18	12-14-16-18	17-19-21-23	19-22-25-28	19-22-25-28	21-24-26-29	21-24-26-29	24-26-29-32	24-26-29-32	24-26-29-32
Outdoor Unit	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)	dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-33-36	31-34-37-40	31-34-37-40	33-36-39-41	33-36-39-41	36-39-42-44	36-39-42-44	36-39-42-44
	Sound Level (PWL)	dB(A)	51	54	54	56	61	61	65	65	65	65	65
	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-960-330(+30)	943-960-330(+30)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)
	Weight	kg	43	46	70	70	116	123	116	125	118	131	131
	Air Volume	m³/min	45	45	55	55	110	110	120	120	120	120	120
Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50	50
	Heating	dB(A)	46	46	48	48	51	51	52	52	52	52	52
	Sound Level (PWL)	dB(A)	65	65	67	67	69	69	70	70	70	70	70
	Operating Current(Max)	A	13	13	19	19	26.5	8	26.5	9.5	28	13	13
	Breaker Size	A	16	16	25	25	32	16	32	16	40	16	16
Ext.Piping	Diameter ⁽⁵⁾	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	50	50	50	50	75	75	75	75	75	75
	Max.Height	Out-In	m	30	30	30	30	30	30	30	30	30	30
	Guaranteed Operating Range (Outdoor)	Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PLA-M SERIES

STANDARD INVERTER



Type	Inverter Heat Pump												
Indoor Unit			PLA-M35EA2	PLA-M50EA2	PLA-M60EA2	PLA-M71EA2	PLA-M100EA2	PLA-M100EA2	PLA-M125EA2	PLA-M125EA2	PLA-M140EA2	PLA-M140EA2	
Outdoor Unit			SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6	SUZ-KA71VA6	PUHZ-P100VKA	PUHZ-P100VKA	PUHZ-P125VKA	PUHZ-P125VKA	PUHZ-P140VKA	PUHZ-P140VKA	
Refrigerant ⁽¹⁾			R410A										
Power Supply	Source	Outdoor power supply											
Cooling	Outdoor(V/Phase/Hz)		VA-VKA:230/Single/50, YKA:400/Three/50										
	Capacity	Rated	kW	3.6	5.5	5.7	7.1	9.4	9.4	12.1	12.1	13.6	13.6
		Min-Max	kW	1.4 - 3.9	2.3 - 5.6	2.3 - 6.3	2.8 - 8.1	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 14.1	5.8 - 14.1
	Total Input	Rated	kW	1.020	1.610	1.760	2.100	3.186	3.186	4.101	4.101	5.418	5.418
	EER			3.53	3.42	3.24	3.38	2.95	2.95	2.95	2.95	2.51	2.51
	Design load		kW	3.6	5.5	5.7	7.1	9.4	9.4	—	—	—	—
	Annual electricity consumption ⁽²⁾		kWh/a	181	296	306	400	537	537	—	—	—	—
Heating	SEER ⁽⁴⁾			6.9	6.5	6.5	6.2	6.1	6.1	—	—	—	—
		Energy efficiency class		A++	A++	A++	A++	A++	A++	—	—	—	—
	Capacity	Rated	kW	4.1	5.8	6.9	8.0	11.2	11.2	13.5	13.5	15.0	15.0
		Min-Max	kW	1.7 - 5.0	1.7 - 7.2	2.5 - 8.0	2.6 - 10.2	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8	4.9 - 15.8
	Total Input	Rated	kW	1.000	1.690	1.970	2.247	3.265	3.265	3.846	3.846	4.672	4.672
	COP			4.10	3.43	3.50	3.56	3.43	3.43	3.51	3.51	3.21	3.21
	Design load		kW	2.6	4.3	4.6	5.8	8.0	8.0	—	—	—	—
	Declared Capacity	at reference design temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.0 (-10°C)	4.7 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	—	—	—	—
		at bivalent temperature	kW	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	4.1 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	—	—	—	—
		at operation limit temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.0 (-10°C)	4.7 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	—	—	—	—
Back up heating capacity		kW	0.3	0.5	0.6	1.1	2.0	2.0	—	—	—	—	
Annual electricity consumption ⁽²⁾		kWh/a	826	1499	1493	1888	2433	2433	—	—	—	—	
SCOP ⁽⁴⁾			4.4	4.0	4.3	4.3	4.6	4.6	—	—	—	—	
	Energy efficiency class		A+	A+	A+	A+	A++	A++	—	—	—	—	
Operating Current(Max)		A	8.4	12.2	14.2	16.4	20.5	12.0	27.2	12.2	30.7	12.2	
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.03 / 0.03	0.03 / 0.03	0.03 / 0.03	0.04 / 0.04	0.07 / 0.07	0.07 / 0.07	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
	Operating Current(Max)		A	0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66	0.66
	Dimensions	H*W*D	mm	258-840-840 <40-950-950>				298-840-840 <40-950-950>					
	Weight		kg	19 <5>	19 <5>	21 <5>	21 <5>	24 <5>	24 <5>	26 <5>	26 <5>	26 <5>	26 <5>
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	11-13-15-16	12-14-16-18	12-14-16-18	14-17-19-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31	24-26-29-32	24-26-29-32
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-32-34	31-34-37-40	31-34-37-40	33-37-41-44	33-37-41-44	36-39-42-44	36-39-42-44
	Sound Level (PWL)		dB(A)	51	54	54	56	61	61	65	65	65	65
Outdoor Unit	Dimensions	H*W*D	mm	550-800-285	880-840-330	880-840-330	880-840-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330
	Weight		kg	35	54	50	53	76	78	84	85	84	85
	Air Volume	Cooling	m³/min	36.3	44.6	40.9	50.1	79	79	86	86	86	86
		Heating	m³/min	34.8	44.6	49.2	48.2	79	79	92	92	92	92
	Sound Level (SPL)	Cooling	dB(A)	49	52	55	55	51	51	54	54	56	56
		Heating	dB(A)	50	52	55	55	54	54	56	56	57	57
	Sound Level (PWL)	Cooling	dB(A)	62	65	65	69	70	70	72	72	75	75
	Operating Current(Max)		A	8.2	12	14	16.1	20	11.5	26.5	11.5	30	11.5
	Breaker Size		A	10	20	20	20	32	16	32	16	40	16
	Ext.Piping	Diameter ⁽³⁾	Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Max.Length		Out-In	m	20	30	30	30	50	50	50	50	50	50
Max.Height		Out-In	m	12	30	30	30	30	30	30	30	30	30
Guaranteed Operating Range (Outdoor)			Cooling ⁽³⁾	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
			Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

PLA-M SERIES

POWER INVERTER



Type	Inverter Heat Pump													
Indoor Unit				PLA-M35EA2	PLA-M50EA2	PLA-M60EA2	PLA-M71EA2	PLA-M100EA2	PLA-M100EA2	PLA-M125EA2	PLA-M125EA2	PLA-M140EA2	PLA-M140EA2	
Outdoor Unit				PUHZ-ZRP35VKA2	PUHZ-ZRP50VKA2	PUHZ-ZRP60VHA2	PUHZ-ZRP71VHA2	PUHZ-ZRP100VKA3	PUHZ-ZRP100VKA3	PUHZ-ZRP125VKA3	PUHZ-ZRP125VKA3	PUHZ-ZRP140VKA3	PUHZ-ZRP140VKA3	
Refrigerant ^{(*)1}				R410A										
Power Supply	Source			Outdoor power supply										
	Outdoor(V/Phase/Hz)			VKA-VHA:230/Single/50, YKA:400/Three/50										
Cooling	Capacity		Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
			Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
	Total Input		Rated	kW	0.833	1.416	1.747	1.868	2.230	2.230	3.869	3.869	4.393	4.393
	EER				4.32	3.53	3.49	3.80	4.26	4.26	3.23	3.23	3.05	3.05
	Design load			kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—
	Annual electricity consumption ^{(*)2}			kWh/a	174	258	321	341	465	475	—	—	—	—
	SEER				7.2	6.7	6.6	7.2	7.1	6.9	—	—	—	—
Heating (Average Season)			Energy efficiency class		A++	A++	A++	A++	A++	A++	—	—	—	—
	Capacity		Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
			Min-Max	kW	1.6 - 5.8	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
	Total Input		Rated	kW	0.920	1.810	2.070	2.110	2.690	2.690	3.773	3.773	4.907	4.907
	COP				4.46	3.31	3.38	3.79	4.16	4.16	3.71	3.71	3.26	3.26
	Design load			kW	2.5	3.8	4.4	4.7	7.8	7.8	—	—	—	—
	Declared Capacity		at reference design temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—
			at bivalent temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—
			at operation limit temperature	kW	2.1 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—
	Back up heating capacity			kW	0.0	0.0	0.0	0.0	0.0	0.0	—	—	—	—
	Annual electricity consumption ^{(*)2}			kWh/a	766	1215	1421	1405	2471	2472	—	—	—	—
	SCOP				4.5	4.3	4.3	4.6	4.4	4.4	—	—	—	—
		Energy efficiency class		A+	A+	A+	A++	A+	A+	—	—	—	—	
Operating Current(Max)				A	13.2	13.2	19.2	19.3	27.0	8.5	27.2	10.2	28.7	13.7
Indoor Unit	Input [cooling / Heating]		Rated	kW	0.03 / 0.03	0.03 / 0.03	0.03 / 0.03	0.04 / 0.04	0.07 / 0.07	0.07 / 0.07	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
	Operating Current(Max)		A	0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66	0.66	
	Dimensions		H*W*D	mm	258-840-840 <40-950-950>				298-840-840 <40-950-950>					
	Weight		kg	19 <5>	19 <5>	21 <5>	21 <5>	24 <5>	24 <5>	26 <5>	26 <5>	26 <5>	26 <5>	
	Air Volume (Lo-Mid-Hi)		m³/min	11-13-15-16	12-14-16-18	12-14-16-18	14-17-19-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31	24-26-29-32	24-26-29-32	
	External Static Pressure		Pa	0	0	0	0	0	0	0	0	0	0	
	Sound Level (Lo-Mid-Hi) (SPL)		dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-32-34	31-34-37-40	31-34-37-40	33-37-41-44	33-37-41-44	36-39-42-44	36-39-42-44	
	Sound Level (PWL)		dB(A)	51	54	54	56	61	61	65	65	65	65	
Outdoor Unit	Dimensions		H*W*D	mm	630-809-300	630-809-300	943-950-330(+30)	943-950-330(+30)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	
	Weight		kg	43	46	70	70	116	123	116	125	118	131	
	Air Volume		Cooling	m³/min	45	45	55	55	110	110	120	120	120	
			Heating	m³/min	45	45	55	55	110	110	120	120	120	
	Sound Level (SPL)		Cooling	dB(A)	44	44	47	47	49	49	50	50	50	
			Heating	dB(A)	46	46	48	48	51	51	52	52	52	
	Sound Level (PWL)		Cooling	dB(A)	65	65	67	67	69	69	70	70	70	
	Operating Current(Max)		A	13	13	19	19	26.5	8	26.5	9.5	28	13	
	Breaker Size		A	16	16	25	25	32	16	32	16	40	16	
	Diameter ^{(*)3}		Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
Ext.Piping	Max.Length		Out-In	m	50	50	50	50	75	75	75	75	75	
	Max.Height		Out-In	m	30	30	30	30	30	30	30	30	30	
	Guaranteed Operating Range (Outdoor)													
		Cooling ^{(*)3}	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PEAD SERIES

R32
R410A

PEAD-M35/50/60/71/100/125/140JA2


Energy efficiency has been improved. A reduced electricity consumption contributes to a further reduction in operating cost. The thin body with a wide-ranged external static pressure of this series is the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space.



ErP Lot-10 compliant, Achieving High Energy Efficiency



The shape of fan wing and casing is improved to provide more smooth air flow, increasing the operation efficiency. All models under 12kW(M35~M100) are complied with ErP Lot 10 and energy rankings of A++ for cooling and A+ for heating. This contributes to a reduction in the cost of annual electricity.

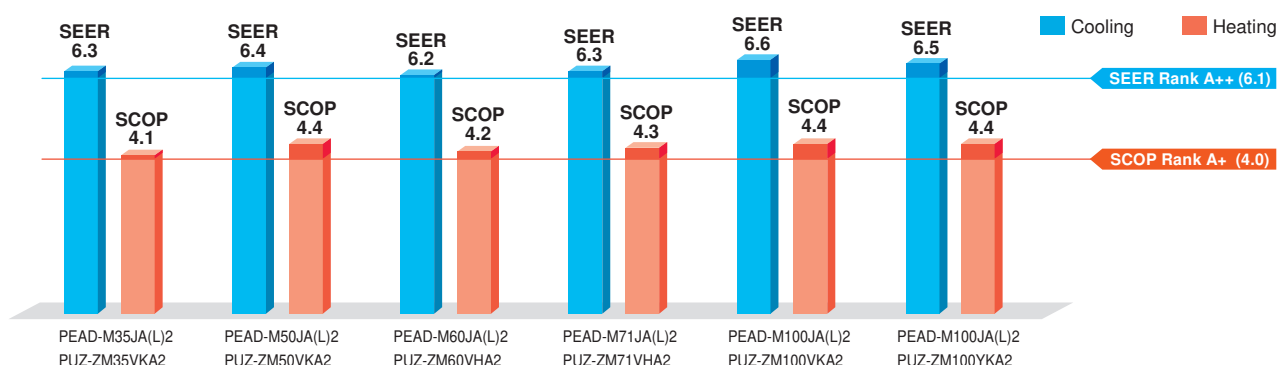

Compact Indoor Units

The height of the models from 35-140 has been unified to 250 mm, which makes installation in low ceiling with minimal clearance space possible.


Selectable Static Pressure Levels

External static pressure conversion can be set up to five levels. Capable of being set to a maximum of 150 Pa, units are applicable to a wide range of building types.

Drain Pump is Optionally Selectable

The line-up consists of two types: models with or without a built-in drain pump, thus allowing more freedom in piping design.

PEAD-M JA2 ▶ Built-in drain pump
PEAD-M JAL2 ▶ No drain pump

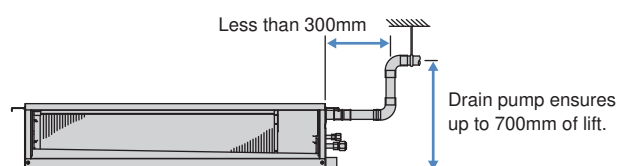

Connectable to Plasma Quad Connect

The optional Plasma Quad Connect MAC-100FT-E can be installed on the indoor unit's air inlet side. For installation, PQ attachment or PQ box is required.

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140JA(L)2

Outdoor Unit

R32

For Single



PUZ-ZM35/50

PUZ-ZM60/71

PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71

PUZ-ZM100/125/140/200/250

Remote Controller



Optional



Optional



Optional



Optional*



Optional*

* PAR-SA9CA-E is also required.

PEAD-M JA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	–	–	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	–	–	–	–	–	–	–	–	–	MSDD-50TR2-E				MSDD-50WR2-E		MSDT-111R3-E			MSDF-1111R2-E	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140JA(L)2

Outdoor Unit

R32

For Single



SUZ-M35

SUZ-M50

SUZ-M60/71

PUZ-M100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140

PUZ-M200/250

Remote Controller



Optional



Optional



Optional



Optional*



Optional*


* PAR-SA9CA-E is also required.

PEAD-M JA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUZ-M&SUZ)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-E		MSDT-111R3-E			MSDF-1111R2-E	

PEAD-M SERIES

POWER INVERTER



Type			Inverter Heat Pump									
Indoor Unit			PEAD-M35JAIIJ2	PEAD-M50JAIIJ2	PEAD-M60JAIIJ2	PEAD-M71JAIIJ2	PEAD-M100JAIIJ2	PEAD-M100JAIIJ2	PEAD-M125JAIIJ2	PEAD-M125JAIIJ2	PEAD-M140JAIIJ2	PEAD-M140JAIIJ2
Outdoor Unit			PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM100VKA2	PUZ-ZM125VKA2	PUZ-ZM125VKA2	PUZ-ZM140VKA2	PUZ-ZM140VKA2
Refrigerant ⁽¹⁾			R32									
Power Supply			Outdoor power supply									
Cooling			VKA-VHA:230/Single/50, YKA:400/Three/50									
Heating	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	13.4	13.4
		Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	6.2 - 15.3	6.2 - 15.3
	Total Input	Rated	kW	0.837	1.190	1.487	1.775	2.261	2.261	3.333	3.701	3.701
	EER ⁽⁴⁾			4.30	4.20	4.10	4.00	4.20	4.20	3.75	3.62	3.62
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—
	Annual electricity consumption ⁽¹²⁾		kWh/a	199	273	342	393	499	510	—	—	—
	SEER ⁽⁴⁾⁽¹⁵⁾			6.3	6.4	6.2	6.3	6.6	6.5	—	—	—
	Energy efficiency class			A++	A++	A++	A++	A++	A++	—	—	—
	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0
		Min-Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
Indoor Unit	Total Input	Rated	kW	0.911	1.363	1.590	1.904	2.545	2.545	3.763	4.102	4.102
	COP ⁽⁴⁾			4.50	4.40	4.40	4.20	4.40	4.40	3.72	3.90	3.90
	Design load		kW	2.4	3.8	4.4	4.9	7.8	7.8	—	—	—
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—
	Back up heating capacity		kW	0.0	0.0	0.0	0.0	0.0	0.0	—	—	—
	Annual electricity consumption ⁽¹²⁾		kWh/a	816	1202	1459	1585	2469	2470	—	—	—
	SEER ⁽⁴⁾⁽¹⁵⁾			4.1	4.4	4.2	4.3	4.4	4.4	—	—	—
	Energy efficiency class			A+	A+	A+	A+	A+	A+	—	—	—
Outdoor Unit	Current(Max)		A	14.2	14.4	20.9	20.9	22.3	10.3	28.8	11.3	14.4
	Input (cooling / Heating)	Rated	kW	0.05	0.07	0.08	0.09	0.14	0.14	0.20	0.21	0.21
	Operating Current(Max)		A	1.16	1.35	1.85	1.9	2.25	2.25	2.34	2.63	2.63
	Dimensions	H*W*D	mm	250×900×732	250×900×732	250×1100×732	250×1100×732	250×1400×732	250×1400×732	250×1400×732	250×1600×732	250×1600×732
	Weight		kg	25(24.5)	26.5(25.5)	29.5(29)	29.5(29)	37(36)	37(36)	38(37)	42(41)	42(41)
	Air Volume (Lo-Mid-Hi)		m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	14.5-18.0-23.0	23.0-28.0-32.0	23.0-28.0-32.0	28.0-34.0-37.0	28.0-34.0-37.0	29.5-35.5-40.0
	External Static Pressure ⁽⁷⁾		Pa	35<-50><-70><-100><-150>	35<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>
	Sound Level (Lo-Mid-Hi) (SPL)		dB(A)	24-29-32	27-33-35	26-32-35	26-32-37	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41
	Sound Level (PWL)		dB(A)	54	58	56	58	62	62	66	66	66
	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)	943-950-330(+25)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)
Ext.Piping	Weight		kg	46	46	67	67	105	111	105	118	118
	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120
		Heating	m³/min	45	45	55	55	110	110	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50
		Heating	dB(A)	46	46	49	49	51	51	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70
		Heating	dB(A)	65	65	67	67	69	69	70	70	70
	Operating Current(Max)		A	13	13	19	19	20	8	26.5	9	30
	Breaker Size		A	16	16	25	25	32	16	32	16	40
	Diameter ⁽⁶⁾	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Guaranteed Operating Range (Outdoor)	Max.Length	Out-In	m	50	50	55	55	100	100	100	100	100
	Max.Height	Out-In	m	30	30	30	30	30	30	30	30	30
	Cooling ⁽³⁾	°C		-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		°C		-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21
	Heating	°C		-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		°C		-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21
	Energy efficiency class			A+	A+	A+	A+	A+	A+	—	—	—
	Energy efficiency class			A+	A+	A+	A+	A+	A+	—	—	—
	Energy efficiency class			A+	A+	A+	A+	A+	A+	—	—	—
	Energy efficiency class			A+	A+	A+	A+	A+	A+	—	—	—

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.


*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 35Pa, for M100 at ESP 37Pa, for M125/140 at ESP 50Pa.

*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *6 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*7 The factory setting of ESP is shown without < > .

PEAD-M SERIES

STANDARD INVERTER



Type				Inverter Heat Pump										
Indoor Unit				PEAD-M35JAIIJ2	PEAD-M50JAIIJ2	PEAD-M60JAIIJ2	PEAD-M71JAIIJ2	PEAD-M100JAIIJ2	PEAD-M100JAIIJ2	PEAD-M125JAIIJ2	PEAD-M125JAIIJ2	PEAD-M140JAIIJ2	PEAD-M140JAIIJ2	
Outdoor Unit				SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA2	PUZ-M100VKA2	PUZ-M125VKA2	PUZ-M125VKA2	PUZ-M140VKA2	PUZ-M140VKA2	
Refrigerant ⁽¹⁾				R32										
Power Supply				Outdoor power supply										
Cooling	Source			VA-VKA:230/Single/50, YKA:400/Three/50										
	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4	
		Min-Max	kW	0.8 - 3.9	1.7 - 5.6	1.6 - 6.3	2.2 - 8.1	4.0 - 10.6	4.0 - 10.6	6.0 - 13.0	6.0 - 13.0	6.1 - 14.1	6.1 - 14.1	
	Total Input	Rated	kW	0.923	1.351	1.694	2.028	2.878	2.878	4.019	4.019	4.768	4.768	
	EER ⁽⁴⁾			3.90	3.70	3.60	3.50	3.30	3.30	3.01	3.01	2.81	2.81	
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—	
	Annual electricity consumption ⁽¹²⁾		kWh/a	199	277	345	397	538	538	—	—	—	—	
	SEER ⁽⁴⁾⁽¹⁵⁾			6.3	6.3	6.1	6.2	6.1	6.1	—	—	—	—	
	Energy efficiency class			A++	A++	A++	A++	A++	A++	—	—	—	—	
	Heating	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0
			Min-Max	kW	1.1 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	2.8 - 12.5	2.8 - 12.5	4.1 - 15.0	4.1 - 15.0	4.2 - 15.8	4.2 - 15.8
Total Input		Rated	kW	1.025	1.463	1.842	2.105	2.947	2.947	3.739	3.739	4.155	4.155	
COP ⁽⁴⁾				4.00	4.10	3.80	3.80	3.80	3.80	3.61	3.61	3.61	3.61	
Design load			kW	2.6	4.3	4.6	5.8	8.0	8.0	—	—	—	—	
Declared Capacity		at reference design temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	—	—	—	—	
		at bivalent temperature	kW	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	—	—	—	—	
		at operation limit temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	—	—	—	—	
Back up heating capacity			kW	0.3	0.5	0.5	0.6	2.0	2.0	—	—	—	—	
Annual electricity consumption ⁽¹²⁾			kWh/a	884	1417	1558	1973	2725	2725	—	—	—	—	
SCOP ⁽⁴⁾⁽¹⁵⁾			4.1	4.2	4.1	4.1	4.1	4.1	—	—	—	—		
Energy efficiency class			A+	A+	A+	A+	A+	A+	—	—	—	—		
Operating Current(Max)			A	9.7	14.9	16.7	16.7	22.3	13.8	27.8	12.8	12.9		
Indoor Unit	Input (cooling / Heating)	Rated	kW	0.05	0.07	0.08	0.09	0.14	0.14	0.20	0.20	0.21	0.21	
	Operating Current(Max)		A	1.16	1.35	1.85	1.9	2.25	2.25	2.34	2.34	2.63	2.63	
	Dimensions	H*W*D	mm	250×900×732	250×900×732	250×1100×732	250×1100×732	250×1400×732	250×1400×732	250×1400×732	250×1400×732	250×1600×732	250×1600×732	
	Weight		kg	25(24.5)	26.5(25.5)	29.5(29)	29.5(29)	37(36)	37(36)	38(37)	38(37)	42(41)	42(41)	
	Air Volume (Lo-Mid-Hi)		m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	14.5-18.0-23.0	23.0-28.0-32.0	23.0-28.0-32.0	28.0-34.0-37.0	28.0-34.0-37.0	29.5-35.5-40.0	29.5-35.5-40.0	
	External Static Pressure ⁽⁷⁾		Pa	35<-50><-70><-100><-150>	35<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	40<-50><-70><-100><-150>	
	Sound Level (Lo-Mid-Hi) (SPL)		dB(A)	24-29-32	27-33-35	26-32-35	26-32-37	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41	34-38-41	
	Sound Level (PWL)		dB(A)	54	58	56	58	62	62	66	66	66	66	
	Outdoor Unit	Dimensions	H*W*D	mm	550-800-285	714-800-285	880-840-330	880-840-330	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)
		Weight		kg	35	41	54	55	76	78	84	85	84	85
Air Volume		Cooling	m³/min	34.3	45.8	50.1	50.1	79	79	86	86	86	86	
		Heating	m³/min	32.7	43.7	50.1	50.1	79	79	92	92	92	92	
Sound Level (SPL)		Cooling	dB(A)	48	48	49	49	51	51	54	54	55	55	
		Heating	dB(A)	48	49	51	51	54	54	56	56	57	57	
Sound Level (PWL)		Cooling	dB(A)	59	64	65	66	70	70	72	72	73	73	
Operating Current(Max)			A	8.5	13.5	14.8	14.8	20	11.5	26.5	11.5	30	11.5	
Breaker Size			A	16	20	20	20	32	16	32	16	40	16	
Ext.Piping		Diameter ⁽⁶⁾	Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	20	30	30	30	55	65	65	65	65		
	Max.Height	Out-In	m	12	30	30	30	30	30	30	30	30		
	Min.Height	Out-In	m	12	30	30	30	30	30	30	30	30		
Guaranteed Operating Range (Outdoor)	Cooling ⁽³⁾	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46		
	Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21		

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140JA(L)2

Outdoor Unit

R410A

For Single



PUHZ-ZRP35/50



PUHZ-ZRP60/71



PUHZ-ZRP100/125/140

R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-ZRP71



PUHZ-ZRP100/125/140/200/250

Remote Controller



Optional



Optional



Optional



Optional*



Optional*

* PAR-SA9CA-E is also required.

PEAD-M JA(L) Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR-E				MSDD-50WR-E		MSDT-111R-E			MSDF-1111R-E	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A




PEAD-M35/50/60/71/100/125/140JA(L)2

Outdoor Unit

R410A

For Single



SUZ-KA35



SUZ-KA50/60/71



PUHZ-P100/125/140

R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-P100/125/140



PUHZ-P200/250

Remote Controller



Optional



Optional



Optional



Optional*



Optional*


* PAR-SA9CA-E is also required.

PEAD-M JA(L) Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P&SUZ)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR-E			MSDD-50WR-E			MSDT-111R-E			MSDF-1111R-E	

PEAD-M SERIES

POWER INVERTER



Type			Inverter Heat Pump											
Indoor Unit			PEAD-M35JAIIJ2 PEAD-M50JAIIJ2 PEAD-M60JAIIJ2 PEAD-M71JAIIJ2 PEAD-M100JAIIJ2 PEAD-M125JAIIJ2 PEAD-M140JAIIJ2 PEAD-M140JAIIJ2											
Outdoor Unit			PUHZ-RP35VKA2 PUHZ-RP50VKA2 PUHZ-RP60VHA2 PUHZ-RP71VHA2 PUHZ-RP100VKA3 PUHZ-RP125VKA3 PUHZ-RP140VKA3 PUHZ-RP140VKA3											
Refrigerant ⁽¹⁾			R410A											
Power Supply			Outdoor power supply VKA-VHA-230/Single/50, YKA-400/Three/50											
Cooling	Source Outdoor(V/Phase/Hz)													
	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
		Min-Max	kW	1.6-4.5	2.3-5.6	2.7-6.7	3.3-8.1	4.9-11.4	4.9-11.4	5.5-14.0	5.5-14.0	6.2-15.3	6.2-15.3	
	Total Input	Rated	kW	0.870	1.420	1.630	1.990	2.410	2.430	3.834	3.834	4.322	4.322	
	EER ⁽⁴⁾			4.14	3.52	3.74	3.53 (3.57)	3.94	3.94	3.26	3.26	3.10	3.10	
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—	
	Annual electricity consumption ⁽²⁾		kWh/a	205	287	340	411	542	553	—	—	—	—	
	SEER ⁽⁴⁾⁽⁵⁾			6.1	6.1	6.2	6.0	6.1	6.0	—	—	—	—	
	Energy efficiency class			A++	A++	A++	A+	A++	A+	—	—	—	—	
	Heating	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
		Min-Max	kW	1.6-5.2	2.5-7.3	2.8-8.2	3.5-10.2	4.5-14.0	4.5-14.0	5.0-16.0	5.0-16.0	5.7-18.0	5.7-18.0	
Total Input		Rated	kW	0.950	1.500	1.790	2.030	2.600	2.600	3.508	3.508	4.071	4.071	
COP ⁽⁴⁾				4.32	4.00	3.91	3.94	4.31	4.31	3.70 (3.99)	3.70 (3.99)	3.60	3.60	
Design load			kW	2.4	3.8	4.4	4.9	7.8	7.8	—	—	—	—	
Declared Capacity		at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—	
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—	
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.7 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—	
Back up heating capacity			kW	0.0	0.0	0.0	0.0	0.0	0.0	—	—	—	—	
Annual electricity consumption ⁽²⁾			kWh/a	831	1232	1487	1718	2593	2594	—	—	—	—	
SCOP ⁽⁴⁾⁽⁵⁾			4.0	4.3	4.1	3.9	4.2	4.2	—	—	—	—		
Energy efficiency class			A+	A+	A+	A	A+	A+	—	—	—	—		
Operating Current(Max)			A	14.2	14.4	20.9	20.9	28.8	10.3	28.8	11.8	30.6	15.6	
Indoor Unit	Input (cooling / Heating)	Rated	kW	0.05	0.07	0.08	0.09	0.14	0.14	0.20	0.20	0.21	0.21	
	Operating Current(Max)		A	1.16	1.35	1.85	1.9	2.25	2.25	2.34	2.34	2.63	2.63	
	Dimensions	H*W*D	mm	250×900×732	250×900×732	250×1100×732	250×1100×732	250×1400×732	250×1400×732	250×1400×732	250×1600×732	250×1600×732	250×1600×732	
	Weight		kg	25(24.5)	26.5(25.5)	29.5(29)	29.5(29)	37(36)	37(36)	38(37)	42(41)	42(41)	42(41)	
	Air Volume (Lo-Mid-Hi)		m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	14.5-18.0-23.0	23.0-28.0-32.0	23.0-28.0-32.0	28.0-34.0-37.0	28.0-34.0-37.0	29.5-35.5-40.0	29.5-35.5-40.0	
	External Static Pressure ⁽⁷⁾		Pa	35<-50>-<70>-<100>-<150>				40<-50>-<70>-<100>-<150>			<40>-50<-<70>-<100>-<150>			
	Sound Level (Lo-Mid-Hi) (SPL)		dB(A)	24-29-32	27-33-35	26-32-35	26-32-37	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41	34-38-41	
	Sound Level (PWL)		dB(A)	54	58	56	58	62	62	66	66	66	66	
	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+30)	943-950-330(+30)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	
	Weight		kg	43	46	70	70	116	123	116	125	118	131	
Outdoor Unit	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120	120	
		Heating	m³/min	45	45	55	55	110	110	120	120	120	120	
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50	
		Heating	dB(A)	46	46	48	48	51	51	52	52	52	52	
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70	
		Heating	dB(A)	66	66	68	68	71	71	72	72	72	72	
	Operating Current(Max)		A	13	13	19	19	26.5	8	26.5	9.5	28	13	
	Breaker Size		A	16	16	25	25	32	16	32	16	40	16	
	Ext.Piping Diameter ⁽⁶⁾			Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length			Out-In	m	50	50	50	50	75	75	75	75	75
Max.Height			Out-In	m	30	30	30	30	30	30	30	30	30	
Guaranteed Operating Range (Outdoor)			Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
			Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.


*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 35Pa, for M100 at ESP 37Pa, for M125/140 at ESP 50Pa.

*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *6 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*7 The factory setting of ESP is shown without < > .

PEAD-M SERIES

STANDARD INVERTER




Type				Inverter Heat Pump																	
Indoor Unit				PEAD-M35JAIIJ2		PEAD-M50JAIIJ2		PEAD-M60JAIIJ2		PEAD-M71JAIIJ2		PEAD-M100JAIIJ2		PEAD-M125JAIIJ2		PEAD-M125JAIIJ2		PEAD-M140JAIIJ2		PEAD-M140JAIIJ2	
Outdoor Unit				SUZ-KA35VA6		SUZ-KA50VA6		SUZ-KA60VA6		SUZ-KA71VA6		PUHZ-P100VKA3		PUHZ-P100VKA3		PUHZ-P125VKA3		PUHZ-P125VKA3		PUHZ-P140VKA3	
Refrigerant ⁽¹⁾				R410A																	
Power Supply				Outdoor power supply VA-VKA-230/Single/50, YKA-400/Three/50																	
Cooling	Capacity		Rated	kW	3.6	4.9	5.7	7.1	9.4	9.4	12.1	12.1	13.6	13.6							
			Min-Max	kW	1.4 ~ 3.9	2.3 ~ 5.6	2.3 ~ 6.3	2.8 ~ 8.1	3.7 ~ 10.6	3.7 ~ 10.6	5.6 ~ 13.0	5.6 ~ 13.0	5.8 ~ 14.1	5.8 ~ 14.1							
	Total Input		Rated	kW	1.029	1.458	1.652	2.060	2.965	2.965	4.143	4.143	5.551	5.551							
	EER ⁽⁴⁾				3.50	3.36	3.45	3.45	3.17	3.17	2.92	2.92	2.45	2.45							
	Design load			kW	3.6	4.9	5.7	7.1	9.4	9.4	—	—	—	—							
	Annual electricity consumption ⁽²⁾			kWh/a	210	284	326	395	596	596	—	—	—	—							
	SEER ⁽⁴⁾⁽⁵⁾				6.0	6.0	6.1	6.2	5.5	5.5	—	—	—	—							
				Energy efficiency class																	
Heating	Capacity		Rated	kW	4.1	5.9	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0							
			Min-Max	kW	1.7 ~ 5.0	1.7 ~ 7.2	2.5 ~ 8.0	2.6 ~ 10.2	2.8 ~ 12.5	2.8 ~ 12.5	4.8 ~ 15.0	4.8 ~ 15.0	4.9 ~ 15.8	4.9 ~ 15.8							
	Total Input		Rated	kW	1.111	1.620	1.928	2.040	2.947	2.947	3.739	3.739	4.347	4.347							
	COP ⁽⁴⁾				3.69	3.64	3.63	3.80	3.80	3.80	3.61	3.61	3.45	3.45							
	Design load			kW	2.8	4.4	4.5	6.0	8.0	8.0	—	—	—	—							
	Declared Capacity		at reference design temperature	kW	2.5 (-10°C)	3.9 (-10°C)	4.1 (-10°C)	5.3 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	—	—	—	—							
			at bivalent temperature	kW	2.5 (-7°C)	3.9 (-7°C)	4.1 (-7°C)	5.3 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	—	—	—	—							
			at operation limit temperature	kW	2.5 (-10°C)	3.9 (-10°C)	4.1 (-10°C)	5.3 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	—	—	—	—							
	Back up heating capacity			kW	0.3	0.5	0.4	0.7	2.0	2.0	—	—	—	—							
	Annual electricity consumption ⁽²⁾			kWh/a	975	1455	1559	2132	2797	2797	—	—	—	—							
				Energy efficiency class																	
Operating Current(Max)				A	9.4	13.4	15.9	18.0	22.3	13.8	27.8	12.8	31.4	12.9							
Indoor Unit	Input (cooling / Heating)		Rated	kW	0.05	0.07	0.08	0.09	0.14	0.14	0.20	0.20	0.21	0.21							
	Operating Current(Max)			A	1.16	1.35	1.85	1.9	2.25	2.25	2.34	2.34	2.63	2.63							
	Dimensions		H*W*D	mm	250×900×732	250×900×732	250×1100×732	250×1100×732	250×1400×732	250×1400×732	250×1400×732	250×1400×732	250×1600×732	250×1600×732							
	Weight			kg	25(24.5)	26.5(25.5)	29.5(29)	29.5(29)	37(36)	37(36)	38(37)	38(37)	42(41)	42(41)							
	Air Volume (Lo-Mid-Hi)			m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	14.5-18.0-23.0	23.0-28.0-32.0	23.0-28.0-32.0	28.0-34.0-37.0	28.0-34.0-37.0	29.5-35.5-40.0	29.5-35.5-40.0							
	External Static Pressure ⁽⁷⁾			Pa	35<-50>-<70>-<100>-<150>				40<-50>-<70>-<100>-<150>												
	Sound Level (Lo-Mid-Hi) (SPL)			dB(A)	24-29-32	27-33-35	26-32-35	26-32-37	31-36-39	31-36-39	35-39-41	35-39-41	34-38-41	34-38-41							
	Sound Level (PWL)			dB(A)	54	58	56	58	62	62	66	66	66	66							
	Dimensions		H*W*D	mm	550-800-285	880-840-330	880-840-330	880-840-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330							
	Weight			kg	35	54	50	53	76	78	84	86	86	86							
Outdoor Unit	Air Volume		Cooling	m³/min	36.3	44.6	40.9	50.1	79	79	86	86	86	86							
			Heating	m³/min	34.8	44.6	49.2	48.2	79	79	92	92	92	92							
	Sound Level (SPL)		Cooling	dB(A)	49	52	55	55	54	54	54	56	56	56							
			Heating	dB(A)	50	52	55	55	54	54	56	56	57	57							
	Sound Level (PWL)		Cooling	dB(A)	62	65	65	69	70	70	72	72	75	75							
	Operating Current(Max)			A	8.2	12	14	16.1	20	11.5	26.5	11.5	30	11.5							
	Breaker Size			A	10	20	20	20	32	16	32	16	40	16							
Ext.Piping	Diameter ⁽⁶⁾		Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88							
	Max.Length		Out-In	m	20	30	30	30	50	50	50	50	50	50							
	Max.Height		Out-In	m	12	30	30	30	30	30	30	30	30	30							
Guaranteed Operating Range (Outdoor)				Cooling ⁽⁷⁾⁽⁸⁾		°C		-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46					
				Heating		°C		-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21				

PEA SERIES

The PEA series is a large capacity ceiling-concealed type indoor units which are visually discreet blending into various environments. The PEA model realizes improved energy efficiency with a patented fan called Turbo In Sirocco fan. A wider option of external static pressure up to 250Pa allows authentic ducted air-conditioning with an elegant interior layout. In addition, the PEA series has a separated structure that enables delivery into a narrow space.




PEA-M200/250LA2



The separated structure increases the efficiency of delivery into a narrow space.



Improved Energy Efficiency

R32 refrigerant with designed fan reduces energy consumption and have resulted in higher energy savings for all capacity ranges.

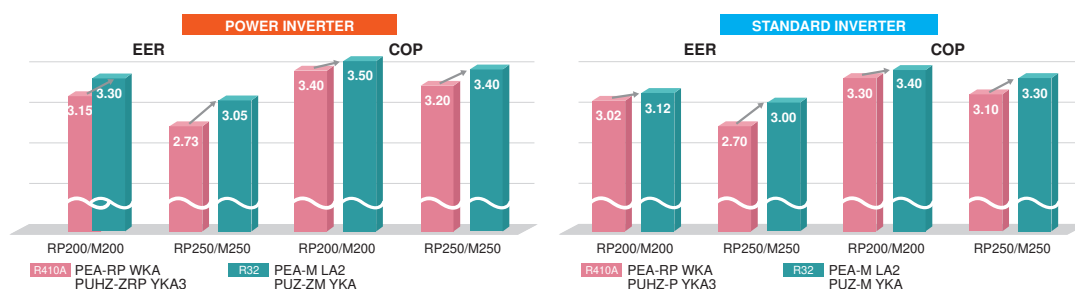

Low input with Fan Design

The PEA series applies a designed fan; a Turbo In Sirocco fan which realizes high efficiency with a lower power input. The design is Mitsubishi Electric's patented technology with a combination of turbo fan inside the sirocco fan.

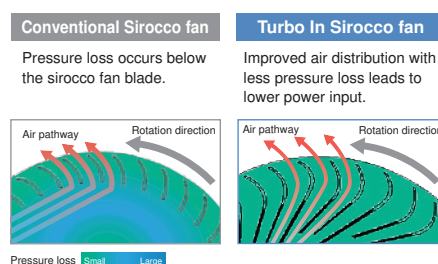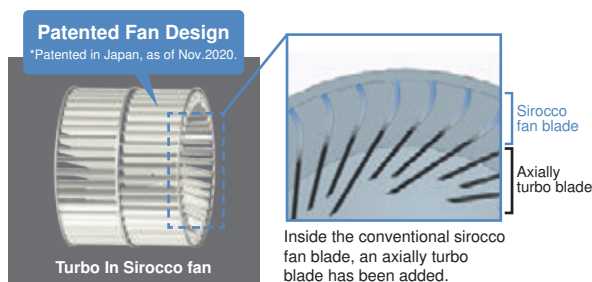

Wide range of external static pressure allows flexible duct design


250Pa setting is newly added enabling total of five static pressure level. The ability to select additional static pressure enables long duct and more freedom in design.

PEA-M200/250LA2 75/<100>/<150>/<200>/<250> Pa

The factory setting of external static pressure is shown without brackets (<>). Refer to "Fan characteristics curves" according to the external static pressure, in the DATA BOOK for the usable range of airflow rate.

PAR-41MAA Group Control

The PAR-41MAA remote controller can control up to 16 systems as a group, and is ideal for supporting the integrated management of building air conditioners.

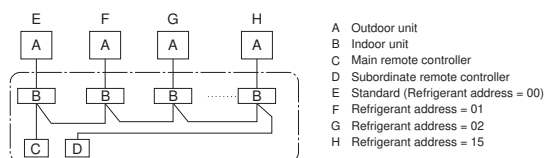

LINE-UP

Indoor Unit



Outdoor Unit

Power Inverter Series

R410A
PUHZ-ZRP200/250

Power Inverter Series

R32
PUZ-ZM200/250

Standard Inverter Series

R410A
PUHZ-P200/250

Standard Inverter Series

R32
PUZ-M200/250

Remote Controller



PEA-M SERIES

POWER INVERTER



Type				Inverter Heat Pump		
Indoor Unit				PEA-M200LA2	PEA-M250LA2	
Outdoor Unit				PUZ-ZM200YKA2	PUZ-ZM250YKA2	
Refrigerant ^(*)				R32		
Power Source				Separate power supply		
Supply Outdoor(V/Phase/Hz)				400/Three/50		
Cooling	Capacity	Rated	kW	19.0	22.0	
		Min-Max	kW	9.2 - 22.4	9.9 - 27.0	
		Total Input	Rated	kW	5.757	7.213
		EER			3.30	3.05
Heating	Capacity	Rated	kW	22.4	27.0	
		Min-Max	kW	7.1 - 25.0	7.3 - 31.0	
		Total Input	Rated	kW	6.400	7.941
		COP			3.50	3.40
Operating	Current(Max)		A	27.3	27.3	
Indoor Unit	Input [cooling / Heating]		Rated	kW	0.32	
	Operating Current(Max)		A	4.8	4.8	
	Dimensions		H x W x D	mm	470-1370-1120	
	Weight			kg	88	
	Air Volume (Lo-Mid-Hi)	Normal airflow mode	m³/min	42.0-51.0-60.0	50.0-61.0-72.0 (75Pa-200Pa)	
		High airflow mode	m³/min	50.0-61.0-72.0 (75Pa-200Pa)	58.0-72.0-84.0 (75Pa-150Pa)	
				42.0-51.0-60.0 (250Pa)	50.0-61.0-72.0 (200Pa)	
					42.0-51.0-60.0 (250Pa)	
	External Static Pressure		Pa	75/(100)/(150)/(200)/(250)		
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	34.5-39.0-43.0	37.5-42.0-46.0	
Sound Level (PWL)		dB(A)	63.0-64.0-64.0	67.0-67.0-68.0		
Outdoor Unit	Dimensions		H x W x D	mm	1338-1050-330(+40)	
	Weight			kg	137	
	Air Volume	Cooling	m³/min	140	140	
		Heating	m³/min	140	140	
	Sound Level (SPL)	Cooling	dB(A)	59	59	
		Heating	dB(A)	62	62	
	Sound Level (PWL)	Cooling	dB(A)	77	77	
		Operating Current(Max)	A	22.5	22.5	
	Breaker Size		A	32	32	
	Ext.Piping	Diameter ^(*)		Liquid/Gas	mm	9.52 / 25.4
Max.Length		Out-In	m	100		
Max.Height		Out-In	m	30		
Guaranteed Operating Range (Outdoor)			Cooling ^(*)	°C	-15 ~ 46	
			Heating	°C	-20 ~ 21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Optional air protection guide is required where ambient temperature is lower than -5°C.

*3 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PEA-M SERIES

STANDARD INVERTER



Type				Inverter Heat Pump		
Indoor Unit				PEA-M200LA2	PEA-M250LA2	
Outdoor Unit				PUZ-M200YKA2	PUZ-M250YKA2	
Refrigerant ^(*)				R32		
Power Source				Separate power supply		
Supply Outdoor(V/Phase/Hz)				400/Three/50		
Cooling	Capacity	Rated	kW	19.0	22.0	
		Min-Max	kW	9.2 - 22.4	9.9 - 27.0	
	Total Input	Rated	kW	6.089	7.333	
	EER			3.12	3.00	
Heating	Capacity	Rated	kW	22.4	27.0	
		Min-Max	kW	6.8 - 25.0	7.3 - 31.0	
	Total Input	Rated	kW	6.588	8.181	
	COP			3.40	3.30	
Operating	Current(Max)		A	27.3	27.3	
Indoor Unit	Input [cooling / Heating]		Rated	0.32	0.48	
	Operating Current(Max)		A	4.8	4.8	
	Dimensions		H × W × D	470-1370-1120		
	Weight		kg	88		
	Air Volume (Lo-Mid-Hi)		Normal airflow mode	m³/min	42.0-51.0-60.0	50.0-61.0-72.0 (75Pa-200Pa)
			High airflow mode	m³/min	50.0-61.0-72.0 (75Pa-200Pa)	58.0-72.0-84.0 (75Pa-150Pa)
					42.0-51.0-60.0 (250Pa)	50.0-61.0-72.0 (200Pa)
					42.0-51.0-60.0 (250Pa)	42.0-51.0-60.0 (250Pa)
	External Static Pressure		Pa	75/(100)/(150)/(200)/(250)		
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	34.5-39.0-43.0	37.5-42.0-46.0	
Sound Level (PWL)		dB(A)	63.0-64.0-64.0	67.0-67.0-68.0		
Outdoor Unit	Dimensions		H × W × D	1338-1050-330(+40)		
	Weight		kg	129		
	Air Volume		Cooling	m³/min	140	
			Heating	m³/min	140	
	Sound Level (SPL)		Cooling	dB(A)	58	
			Heating	dB(A)	60	
	Sound Level (PWL)		Cooling	dB(A)	78	
					77	
	Operating Current(Max)		A	22.5	22.5	
	Breaker Size		A	32	32	
Ext.Piping	Diameter ^(*)		Liquid/Gas	9.52 / 25.4	12.7 / 25.4	
	Max.Length		Out-In	70	70	
	Max.Height		Out-In	30	30	
Guaranteed Operating Range (Outdoor)			Cooling ^(*)	°C	-15 ~ 46	
			Heating	°C	-20 ~ 21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Optional air protection guide is required where ambient temperature is lower than -5°C.

*3 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PEA-M SERIES

POWER INVERTER



Type				Inverter Heat Pump	
Indoor Unit				PEA-M200LA2	PEA-M250LA2
Outdoor Unit				PUHZ-ZRP200YKA3	PUHZ-ZRP250YKA3
Refrigerant ^(*)1)				R410A	
Power Supply	Source	Separate power supply			
	Outdoor (V/Phase/Hz)	400 / Three / 50			
Cooling	Capacity	Rated	kW	19.0	22.0
		Min - Max	kW	9.0 - 22.4	11.2 - 27.0
	Total Input	Rated	kW	5.937	7.971
	EER			3.20	2.76
Heating (Average Season)	Capacity	Rated	kW	22.4	27.0
		Min - Max	kW	9.5 - 25.0	12.5 - 31.0
	Total Input	Rated	kW	6.530	8.181
	COP			3.43	3.30
Operating Current (max)			23.8	25.8	
Indoor Unit	Input [Cooling / Heating]	Rated	kW	0.32/0.32	0.48/0.48
	Operating Current (max)		A	4.8	4.8
	Dimensions	H x W x D	mm	470-1370-1120	
	Weight		kg	88	
	Air Volume [Lo-Mid-Hi]	Normal mode	m³/min	45-51-60	50-61-72
		High airflow mode	m³/min	50-61-72	58-72-84
	External Static Pressure		Pa	75/(100)/(150)/(200)/(250)	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	34.5-39.0-43.0	37.5-42.0-46.0
	Sound Level (PWL)		dB(A)	63.0-64.0-64.0	67.0-67.0-68.0
	Outdoor Unit	Dimensions	H x W x D	mm	1338-1050-330(+40)
Weight		kg	135	135	
Air Volume		Cooling	m³/min	140	140
		Heating	m³/min	140	140
Sound Level (SPL)		Cooling	dB(A)	59	59
		Heating	dB(A)	62	62
Sound Level (PWL)		Cooling	dB(A)	77	77
		Operating Current (max)		A	19.0
Breaker Size		A	32	32	
Ext. Piping		Diameter ^(*)3)	Liquid / Gas	mm	9.52 / 25.4
	Max. Length	Out-In	m	100	100
	Max. Height	Out-In	m	30	30
Guaranteed Operating Range (Outdoor)			Cooling ^(*)2)	°C	-15 ~ 46
			Heating	°C	-20 ~ 21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Optional air protection guide is required where ambient temperature is lower than -5°C.

*3 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PEA-M SERIES

STANDARD INVERTER



Type				Inverter Heat Pump	
Indoor Unit				PEA-M200LA2	PEA-M250LA2
Outdoor Unit				PUHZ-P200YKA3	PUHZ-P250YKA3
Refrigerant ^(*)				R410A	
Power Supply	Source	Separate power supply			
	Outdoor (V/Phase/Hz)	400 / Three / 50			
Cooling	Capacity	Rated	kW	19.0	22.0
		Min - Max	kW	9.0 - 22.4	11.2 - 27.0
	Total Input	Rated	kW	6.188	8.058
	EER			3.07	2.73
Heating (Average Season)	Capacity	Rated	kW	22.4	27.0
		Min - Max	kW	9.5 - 25.0	12.5 - 31.0
	Total Input	Rated	kW	6.706	8.437
	COP			3.34	3.20
Operating Current (max)				23.8	25.8
Indoor Unit	Input [Cooling / Heating]	Rated	kW	0.32/0.32	0.48/0.48
	Operating Current (max)		A	4.8	4.8
	Dimensions	H x W x D	mm	470-1370-1120	
	Weight		kg	88	
	Air Volume [Lo-Mid-Hi]	Normal mode	m³/mi	45-51-60	50-61-72
		High airflow mode	m³/mi	50-61-72	58-72-84
	External Static Pressure		Pa	75/(100)/(150)/(200)/(250)	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	34.5-39.0-43.0	37.5-42.0-46.0
	Sound Level (PWL)		dB(A)	63.0-64.0-64.0	67.0-67.0-68.0
	Outdoor Unit	Dimensions	H x W x D	mm	1338-1050-330(+40)
Weight		kg	127	135	
Air Volume		Cooling	m³/min	140	140
		Heating	m³/min	140	140
Sound Level (SPL)		Cooling	dB(A)	58	59
		Heating	dB(A)	60	62
Sound Level (PWL)		Cooling	dB(A)	78	77
Operating Current (max)		A	19.0	21.0	
Breaker Size		A	32	32	
Ext. Piping		Diameter ^(*)	Liquid / Gas	mm	9.52 / 25.4
	Max. Length	Out-In	m	70	70
	Max. Height	Out-In	m	30	30
Guaranteed Operating Range (Outdoor)			Cooling ^(*)	°C	-15 ~ 46
			Heating	°C	-20 ~ 21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Optional air protection guide is required where ambient temperature is lower than -5°C.

*3 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PKA SERIES

The compact, wall-mounted indoor units offer the convenience of simple installation, and a large product line-up (M35-M100 models) ensures a best-match solution. Designed for highly efficient energy savings, the PKA Series is the answer to your air conditioning needs.

R32
R410A

PKA-M35/50LA(L)2

PKA-M60/71/100KA(L)2

R32
R410A




New Design (M35-50)

A sharp and simple form that combines beauty and function. The simple square design harmonizes beautifully with the straight lines created by the intersection of the walls, floor and ceiling of the space, leading to a better quality of space. Also adopted a new white body color. It will make your life and space beautiful and comfortable without disturbing the atmosphere of the room. In addition, we realized miniaturization of conventional model. It contributes to space saving of installation area and giving room to room space.



Quietness (M35-50)

The noise level has been significantly reduced compared to the conventional model by reviewing the unit structure and improving the line flow fan.

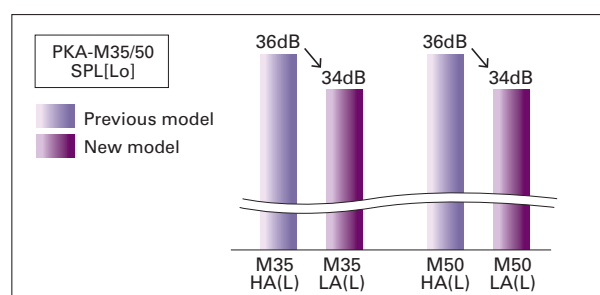

New Wireless Remote Controller Included

The PKA-KAL2 series wireless remote controller has been updated. It now comes with a new stylish remote controller that fits comfortably in your hand and has a wide range of useful functions.




Main Functions of new Wireless Remote Controller

- Weekly Timer
- Backlight
- Dual set point
- Battery replacement sign etc...

ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++

Highly efficient indoor unit heat exchangers and newly designed power inverters (PUHZ-ZM) contribute to an amazing reduction in electricity consumption throughout a year, and have resulted in models in the full-capacity range attaining the rank A, A+ and A++ energy savings rating.

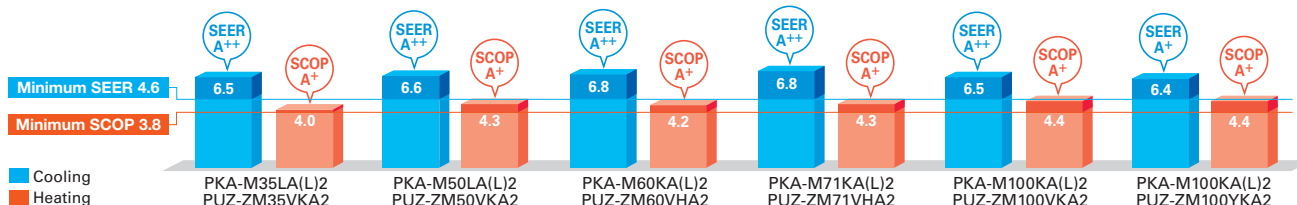


Airflow Control – Horizontal Airflow – (M35-50)

Significantly improved airflow control to achieve horizontal airflow. This reduces the feeling of draft even on a wall-mounted model, and air conditioning the indoor space firmly.

Airflow distributions

PKA-M50LA <Cooling mode> Horizontal airflow

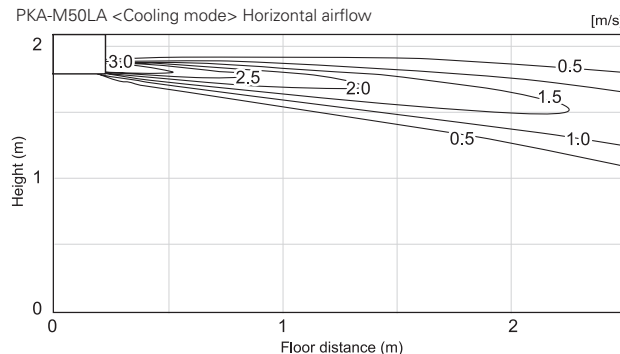

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PKA-M35/50LA(L)2

R32
R410A



PKA-M60/71/100KA(L)2

Outdoor Unit

R32

For Single



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71



PUZ-ZM100/125/140/200/250

Remote Controller



Optional (*)



Optional



Optional (*)



*PKA-M•KAL2/LAL2 only

(*) PAC-SH29TC-E is required for LAL and KAL (optional)

PKA-M LA(L)2/KA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		35x1	50x1	60x1	71x1	100x1	—	—	—	—	35x2	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E				MSDD-50WR2-E	—	MSDT-111R3-E			MSDF-1111R2-E	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PKA-M35/50LA(L)2



PKA-M60/71/100KA(L)2

Outdoor Unit

R32

For Single



PUZ-M100

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140



PUZ-M200/250

Remote Controller



Optional (*)



Optional



Optional (*)



*PKA-M•KAL2/LAL2 only


(*) PAC-SH29TC-E is required for LAL and KAL (optional)

PKA-M LA(L)2/KA(L)2 Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUZ-M)		—	—	—	—	100x1	—	—	—	—	—	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-E	—	MSDT-111R3-E			MSDF-111R2-E	

PKA-M SERIES

POWER INVERTER



Type				Inverter Heat Pump						
Indoor Unit				PKA-M35LA(L)2	PKA-M50LA(L)2	PKA-M60KA(L)2	PKA-M71KA(L)2	PKA-M100KA(L)2	PKA-M100KA(L)2	
Outdoor Unit				PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM100YKA2	
Refrigerant ⁽¹⁾				R32						
Power Supply				Outdoor power supply						
Cooling	Source Outdoor(V/Phase/Hz)			VKA·VHA:230/Single/50, YKA:400/Three/50						
	Capacity	Rated	kW	3.6	4.6	6.1	7.1	9.5	9.5	
		Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	
	Total Input	Rated	kW	0.857	1.239	1.560	1.863	2.435	2.435	
	EER			4.20	3.71	3.91	3.81	3.90	3.90	
	Design load		kW	3.6	4.6	6.1	7.1	9.5	9.5	
	Annual electricity consumption ⁽²⁾		kWh/a	194	244	314	365	508	519	
	SEER ⁽⁴⁾			6.5	6.6	6.8	6.8	6.5	6.4	
	Energy efficiency class			A++	A++	A++	A++	A++	A++	
	Heating	Capacity	Rated	kW	4.1	5.0	7.0	8.0	11.2	11.2
Min-Max			kW	1.6 - 5.2	2.5 - 7.0	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	
Total Input		Rated	kW	1.040	1.344	1.732	2.116	3.102	3.102	
COP				3.94	3.72	4.04	3.78	3.61	3.61	
Design load			kW	2.4	3.3	4.4	4.7	7.8	7.8	
Declared Capacity		at reference design temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	
		at bivalent temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	
		at operation limit temperature	kW	2.2 (-11°C)	3.2 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	
Back up heating capacity			kW	0.0	0.0	0.0	0.0	0.0	0.0	
Annual electricity consumption ⁽²⁾			kWh/a	829	1074	1464	1530	2477	2478	
SCOP ⁽⁴⁾			4.0	4.3	4.2	4.3	4.4	4.4		
Energy efficiency class			A+	A+	A+	A+	A+	A+		
Operating Current(Max)			A	13.4	13.4	19.4	19.4	20.6	8.6	
Indoor Unit	Input [cooling / Heating]		Rated	kW	0.04 / 0.03	0.04 / 0.03	0.06 / 0.05	0.06 / 0.05	0.08 / 0.07	0.08 / 0.07
	Operating Current(Max)		A	0.35	0.35	0.43	0.43	0.57	0.57	
	Dimensions		H*W*D	mm	299-898-237	299-898-237	365-1170-295	365-1170-295	365-1170-295	365-1170-295
	Weight		kg	12.6	12.6	21	21	21	21	
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	7.5-8.2-9.2-10.9	7.5-8.2-9.2-10.9	18-20-22	18-20-22	20-23-26	20-23-26	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	34-37-40-43	34-37-40-43	39-42-45	39-42-45	41-45-49	41-45-49	
	Sound Level (PWL)		dB(A)	60	60	64	64	65	65	
	Dimensions		H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)	943-950-330(+25)	1338-1050-330(+40)	1338-1050-330(+40)
Outdoor Unit	Weight		kg	46	46	67	67	105	111	
	Air Volume	Cooling	m³/min	45	45	55	55	110	110	
		Heating	m³/min	45	45	55	55	110	110	
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	
		Heating	dB(A)	46	46	49	49	51	51	
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	
		Heating	dB(A)	65	65	67	67	69	69	
	Operating Current(Max)		A	13	13	19	19	20	8	
	Breaker Size		A	16	16	25	25	32	16	
	Ext.Piping	Diameter ⁽³⁾		mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Max.Length		m	50	50	55	55	100	100		
Max.Height		m	30	30	30	30	30	30		
Guaranteed Operating Range (Outdoor)		Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
			Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PKA-M SERIES

STANDARD INVERTER



Type				Inverter Heat Pump				
Indoor Unit				PKA-M100KA(L)2				
Outdoor Unit				PUZ-M100VKA2		PUZ-M100YKA2		
Refrigerant ⁽¹⁾				R32				
Power Supply				Outdoor power supply				
Cooling				VKA・VHA:230/Single/50, YKA:400/Three/50				
	Capacity	Rated	kW	9.5		9.5		
		Min-Max	kW	4.0 - 10.6		4.0 - 10.6		
	Total Input	Rated	kW	2.941		2.941		
	EER			3.23		3.23		
	Design load		kW	9.5		9.5		
	Annual electricity consumption ⁽²⁾		kWh/a	573		573		
	SEER ⁽⁴⁾			5.8		5.8		
	Energy efficiency class			A+		A+		
	Heating	Capacity	Rated	kW	11.2		11.2	
			Min-Max	kW	2.8 - 12.5		2.8 - 12.5	
Total Input		Rated	kW	3.284		3.284		
COP				3.41		3.41		
Design load			kW	8.0		8.0		
Declared Capacity		at reference design temperature	kW	6.0 (-10°C)		6.0 (-10°C)		
		at bivalent temperature	kW	7.0 (-7°C)		7.0 (-7°C)		
		at operation limit temperature	kW	4.5 (-15°C)		4.5 (-15°C)		
Back up heating capacity			kW	2.0		2.0		
Annual electricity consumption ⁽²⁾			kWh/a	2780		2780		
SCOP ⁽⁴⁾			4.0		4.0			
Energy efficiency class			A+		A+			
Operating Current(Max)				A		12.1		
Indoor Unit	Input [cooling / Heating]		Rated	kW	0.08 / 0.07		0.08 / 0.07	
	Operating Current(Max)			A	0.57		0.57	
	Dimensions		H*W*D	mm	365-1170-295		365-1170-295	
	Weight			kg	21		21	
	Air Volume (Lo-Mi2-Mi1-Hi)			m³/min	20-23-26		20-23-26	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)			dB(A)	41-45-49		41-45-49	
	Sound Level (PWL)			dB(A)	65		65	
	Dimensions		H*W*D	mm	981-1050-330 (+40)		981-1050-330(+40)	
	Weight			kg	76		78	
	Air Volume		Cooling	m³/min	79		79	
Outdoor Unit			Heating	m³/min	79		79	
	Sound Level (SPL)	Cooling	dB(A)	51		51		
		Heating	dB(A)	54		54		
	Sound Level (PWL)	Cooling	dB(A)	70		70		
		Heating	dB(A)	70		70		
	Operating Current(Max)		A	20.0		11.5		
	Breaker Size		A	32		16		
	Ext.Piping	Diameter ⁽³⁾	Liquid/Gas	mm	9.52 / 15.88		9.52 / 15.88	
		Max.Length	Out-In	m	55		55	
		Max.Height	Out-In	m	30		30	
Guaranteed Operating Range (Outdoor)				Cooling ⁽³⁾	°C	-15 ~ +46		
				Heating	°C	-15 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PKA-M35/50LA(L)2



PKA-M60/71/100KA(L)2

Outdoor Unit

R410A


For Single



PUAH-ZRP35/50



PUAH-ZRP60/71




PUAH-ZRP100

R410A

For Multi
(Twin/Triple/Quadruple)



PUAH-ZRP71



PUAH-ZRP100/125/140/200/250

Remote Controller



Optional (*)



Optional



Optional (*)



*PKA-M•KAL2/LAL2 only

(*) PAC-SH29TC-E is required for LAL and KAL (optional)

PKA-M LA(L)/KA(L) Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	—	—	—	—	35x2	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR-E				MSDD-50WR-E	—	MSDT-111R-E			MSDF-111R-E	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PKA-M35/50LA(L)2



PKA-M60/71/100KA(L)2

Outdoor Unit

R410A

For Single



PUAH-P100

R410A

For Multi
(Twin/Triple/Quadruple)



PUAH-P100/125/140



PUAH-P200/250

Remote Controller



Optional (*)



Optional



Optional (*)



*PKA-M•KAL2/LAL2 only

(*) PAC-SH29TC-E is required for LAL and KAL (optional)

PKA-M LA/KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																			
	For Single									For Twin						For Triple			For Quadruple	
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P)	—	—	—	—	100x1	—	—	—	—	—	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4
Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E			MSDD-50WR-E	—	MSDT-111R-E			MSDF-1111R-E	

PKA-M SERIES

POWER INVERTER



Type				Inverter Heat Pump					
Indoor Unit				PKA-M35LA(L)2	PKA-M50LA(L)2	PKA-M60KA(L)2	PKA-M71KA(L)2	PKA-M100KA(L)2	PKA-M100KA(L)2
Outdoor Unit				PUHZ-ZRP35VKA2	PUHZ-ZRP50VKA2	PUZ-ZRP60VHA2	PUHZ-ZRP71VHA2	PUHZ-ZRP100VKA3	PUHZ-ZRP100YKA3
Refrigerant ⁽¹⁾				R410A					
Power Source				Outdoor power supply					
Supply Outdoor(V/Phase/Hz)				VKA-VHA:230/Single/50, YKA:400/Three/50					
Cooling	Capacity	Rated	kW	3.6	4.6	6.1	7.1	9.5	9.5
		Min-Max	kW	1.6 - 4.5	2.3 - 5.4	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4
	Total Input	Rated	kW	0.940	1.424	1.601	1.802	2.398	2.398
	EER			3.80	3.23	3.81	3.94	3.96	3.96
	Design load		kW	3.6	4.6	6.1	7.1	9.5	9.5
	Annual electricity consumption ⁽²⁾		kWh/a	206	263	324	367	522	532
Heating	SEER ⁽⁴⁾			6.1	6.1	6.5	6.7	6.3	6.2
	Energy efficiency class			A++	A++	A++	A++	A++	A++
	Capacity	Rated	kW	4.1	5.0	7.0	8.0	11.2	11.2
		Min-Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0
	Total Input	Rated	kW	1.070	1.501	1.960	2.191	3.043	3.043
	COP			3.83	3.33	3.57	3.65	3.68	3.68
	Design load		kW	2.4	3.3	4.4	4.7	7.8	7.8
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)
		at bivalent temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)
		at operation limit temperature	kW	2.2 (-11°C)	3.2 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)
Operating	Back up heating capacity		kW	0.0	0.0	0.0	0.0	0.0	0.0
	Annual electricity consumption ⁽²⁾		kWh/a	841	1126	1466	1529	2659	2660
	SCOP ⁽⁴⁾			3.9	4.1	4.2	4.3	4.1	4.1
	Energy efficiency class			A	A+	A+	A+	A+	A+
	Current(Max)		A	13.4	13.4	19.4	19.4	27.1	8.6
	Input [cooling / Heating]	Rated	kW	0.04 / 0.03	0.04 / 0.03	0.06 / 0.05	0.06 / 0.05	0.08 / 0.07	0.08 / 0.07
Indoor Unit	Operating Current(Max)		A	0.35	0.35	0.43	0.43	0.57	0.57
	Dimensions	H*W*D	mm	299-898-237	299-898-237	365-1170-295	365-1170-295	365-1170-295	365-1170-295
	Weight		kg	12.6	12.6	21	21	21	21
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	7.5-8.2-9.2-10.9	7.5-8.2-9.2-10.9	18-20-22	18-20-22	20-23-26	20-23-26
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	34-37-40-43	34-37-40-43	39-42-45	39-42-45	41-45-49	41-45-49
	Sound Level (PWL)		dB(A)	60	60	64	64	65	65
Outdoor Unit	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+30)	943-950-330(+30)	1338-1050-330(+40)	1338-1050-330(+40)
	Weight		kg	43	46	70	70	116	123
	Air Volume	Cooling	m³/min	45	45	55	55	110	110
		Heating	m³/min	45	45	55	55	110	110
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49
		Heating	dB(A)	46	46	48	48	51	51
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69
		Heating	dB(A)	65	65	67	67	69	69
	Operating Current(Max)		A	13	13	19	19	26.5	8
	Breaker Size		A	16	16	25	25	32	16
Ext.Piping	Diameter ⁽⁵⁾	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	50	50	50	50	75	75
	Max.Height	Out-In	m	30	30	30	30	30	30
Guaranteed Operating Range (Outdoor)				Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
				Heating	°C	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PKA-M SERIES

STANDARD INVERTER



Type				Inverter Heat Pump					
Indoor Unit				PKA-M100KA(L)2					
Outdoor Unit				PUHZ-P100VKA					
Refrigerant ⁽¹⁾				R410A					
Power Source				Outdoor power supply					
Supply Outdoor(V/Phase/Hz)				VKA-VHA:230/Single/50, YKA:400/Three/50					
Cooling	Capacity	Rated	kW	9.4					
		Min-Max	kW	3.7 - 10.6					
	Total Input	Rated	kW	3.122					
	EER			3.01					
	Design load		kW	9.4					
	Annual electricity consumption ⁽²⁾		kWh/a	586					
Heating	SEER ⁽⁴⁾			5.6					
	Energy efficiency class			A+					
	Capacity	Rated	kW	11.2					
		Min-Max	kW	2.8 - 12.5					
	Total Input	Rated	kW	3.489					
	COP			3.21					
	Design load		kW	8.0					
	Declared Capacity	at reference design temperature	kW	6.0 (-10°C)					
		at bivalent temperature	kW	7.0 (-7°C)					
		at operation limit temperature	kW	4.5 (-15°C)					
Operating	Back up heating capacity		kW	2.0					
	Annual electricity consumption ⁽²⁾		kWh/a	2799					
	SCOP ⁽⁴⁾			4.0					
	Energy efficiency class			A+					
	Current(Max)		A	20.6					
	Input [cooling / Heating]	Rated	kW	0.08 / 0.07					
Indoor Unit	Operating Current(Max)		A	0.57					
	Dimensions	H*W*D	mm	365-1170-295					
	Weight		kg	21					
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	20-23-26					
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	41-45-49					
	Sound Level (PWL)		dB(A)	65					
Outdoor Unit	Dimensions	H*W*D	mm	981-1050-330					
	Weight		kg	76					
	Air Volume	Cooling	m³/min	79					
		Heating	m³/min	79					
	Sound Level (SPL)	Cooling	dB(A)	51					
		Heating	dB(A)	54					
	Sound Level (PWL)	Cooling	dB(A)	70					
		Heating	dB(A)	70					
	Operating Current(Max)		A	20					
	Breaker Size		A	32					
Ext.Piping	Diameter ⁽⁵⁾	Liquid/Gas	mm	9.52 / 15.88					
	Max.Length	Out-In	m	50					
	Max.Height	Out-In	m	30					
Guaranteed Operating Range (Outdoor)				Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
				Heating	°C	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PCA-KA SERIES

R32
R410A

PCA-M35/50/60/71/100/125/140KA2

A stylish new indoor unit design and airflow settings for both high- and low-ceiling interiors expand installation possibilities. Together with exceptional energy-saving performance, these units are the solution to diversified air conditioning needs.



Stylish Indoor Unit Design


A stylish square-like design is adopted for the indoor units of all models. As a result, the units blend in better with the ceiling.



PCA-KA


ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++

A direct-current (DC) fan motor is installed in the indoor unit, increasing the seasonal energy efficiency of newly designed Power Inverter series (PUHZ-ZM) and resulting in the full capacity models comply ErP Lot 10 with energy ranking A+/A++ for cooling and A/A+ for heating. This contribute to an impressive reduction in the cost of annual electricity.

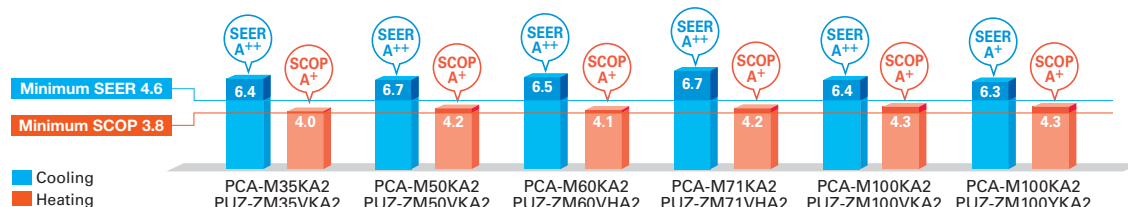


Optional Drain Pump for Full-capacity Models

The pumping height of the optional drain pump has been increased from 400mm to 600mm, expanding flexibility in choosing unit location during installation work.




Outside-air Intake

Units are equipped with a knock-out hole that enables the induction of fresh outside-air.

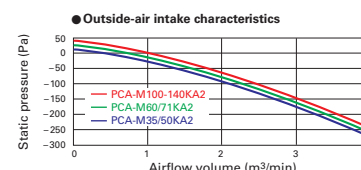

Equipped with Automatic Air-speed Adjustment

In addition to the conventional 4-speed setting, units are now equipped with an automatic air-speed adjustment mode. This setting automatically adjusts the air-speed to conditions that match the room environment. At the start of heating/cooling operation, the airflow is set to high-speed to quickly heat/cool the room. When the room temperature reaches the desired setting, the airflow speed is decreased automatically for stable comfortable heating/cooling operation.

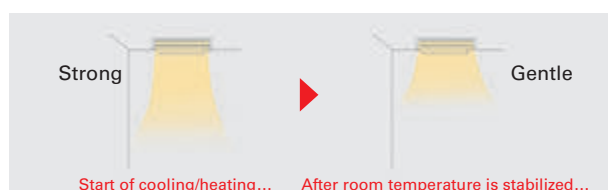

Equipped with High- /Low-ceiling Modes

Units are equipped with high- and low-ceiling operation modes that make it possible to switch the airflow volume to match room height. The ability to choose the optimum airflow volume makes it possible to optimize the breezy sensation felt throughout the room.

Capacity	High ceiling	Standard ceiling	Low ceiling
35	3.5m	2.7m	2.5m
50	3.5m	2.7m	2.5m
60	3.5m	2.7m	2.5m
71	3.5m	2.7m	2.5m
100	4.2m	3.0m	2.6m
125	4.2m	3.0m	2.6m
140	4.2m	3.0m	2.6m

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PCA-M35/50/60/71/100/125/140KA2

Outdoor Unit

R32

For Single



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71



PUZ-ZM100/125/140/200/250

Remote Controller



Optional



Optional



Optional



Optional



Optional*

* PAR-SA9CA is also required.

PCA-M Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E				MSDD-50WR2-E		MSDT-111R3-E			MSDF-111R2-E	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PCA-M35/50/60/71/100/125/140KA2

Outdoor Unit

R32

For Single



SUZ-M35



SUZ-M50



SUZ-M60/71



PUZ-M100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140



PUZ-M200/250

Remote Controller



Optional



Optional



Optional



Optional



Optional*

* PAR-SA9CA is also required.

PCA-M Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUZ-M&SUZ)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E				MSDD-50WB2-E		MSDT-111R3-E			MSDF-111R2-E	

PCA-M KA SERIES

POWER INVERTER



Type				Inverter Heat Pump											
Indoor Unit				PCA-M35KA2	PCA-M50KA2	PCA-M60KA2	PCA-M71KA2	PCA-M100KA2	PCA-M100KA2	PCA-M125KA2	PCA-M125KA2	PCA-M140KA2	PCA-M140KA2		
Outdoor Unit				PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM100YKA2	PUZ-ZM125VKA2	PUZ-ZM125YKA2	PUZ-ZM140VKA2	PUZ-ZM140YKA2		
Refrigerant ^(*)1)				R32											
Power Source				Outdoor power supply											
Supply				VKA-VHA:230/Single/50, YKA:400/Three/50											
Cooling	Source														
	Outdoor(V/Phase/Hz)														
	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4		
		Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0		
	Total Input	Rated	kW	0.829	1.250	1.521	1.829	2.375	2.375	3.846	3.846	3.941	3.941		
	EER			4.34	4.00	4.01	3.88	4.00	4.00	3.25	3.25	3.40	3.40		
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—		
	Annual electricity consumption ^(*)2)		kWh/a	197	260	328	371	516	527	—	—	—	—		
SEER ^(*)4)			6.4	6.7	6.5	6.7	6.4	6.3	—	—	—	—			
Heating	Energy efficiency class		A++	A++	A++	A++	A++	A++	A++	—	—	—	—		
	Capacity	Rated	kW	4.1	5.5	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0		
		Min-Max	kW	1.6 - 5.2	2.5 - 6.6	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0		
	Total Input	Rated	kW	1.019	1.361	1.745	2.156	3.018	3.018	3.954	3.954	4.432	4.432		
	COP			4.02	4.04	4.01	3.71	3.71	3.71	3.54	3.54	3.61	3.61		
	Design load		kW	2.4	3.8	4.4	4.7	7.8	7.8	—	—	—	—		
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—		
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—		
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—		
Back up heating capacity		kW	0.0	0.0	0.0	0.0	0.0	0.0	—	—	—	—			
Annual electricity consumption ^(*)2)		kWh/a	838	1266	1501	1567	2536	2537	—	—	—	—			
SCOP ^(*)4)			4.0	4.2	4.1	4.2	4.3	4.3	—	—	—	—			
Energy efficiency class		A+	A+	A+	A+	A+	A+	A+	A+	—	—	—			
Operating Current(Max)				A	13.3	13.4	19.4	19.4	20.7	8.7	27.3	9.8	30.9	12.7	
Indoor Unit	Input [cooling / Heating]			Rated	kW	0.04 / 0.04	0.05 / 0.05	0.06 / 0.06	0.06 / 0.06	0.09 / 0.09	0.09 / 0.09	0.11 / 0.11	0.11 / 0.11	0.14 / 0.14	0.14 / 0.14
	Operating Current(Max)			A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	0.90	0.90	
	Dimensions			H*W*D	mm	230-960-680			230-1280-680			230-1600-680			
	Weight			kg	25	26	32	32	37	37	38	38	40	40	
	Air Volume (Lo-Mi2-Mi1-Hi)			m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	23-25-27-29	24-26-29-32	24-26-29-32	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)			dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	39-41-43-45	41-43-45-48	41-43-45-48	
	Sound Level (PWL)			dB(A)	60	60	60	62	63	63	65	65	68	68	
	Dimensions			H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)	943-950-330(+25)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	
	Weight			kg	46	46	67	67	105	111	105	114	105	118	
	Air Volume			Cooling	m³/min	45	45	55	55	110	110	120	120	120	
Outdoor Unit	Heating			m³/min	45	45	55	55	110	110	120	120	120	120	
	Sound Level (SPL)			Cooling	dB(A)	44	44	47	47	49	49	50	50	50	
	Heating			dB(A)	46	46	49	49	51	51	52	52	52		
	Sound Level (PWL)			Cooling	dB(A)	65	65	67	67	69	69	70	70	70	
	Heating			dB(A)	67	67	69	69	71	71	72	72	72		
	Operating Current(Max)			A	13	13	19	19	20	8	26.5	9	30	11.8	
	Breaker Size			A	16	16	25	25	32	16	32	16	40	16	
	Diameter ^(*)3)			Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max.Length			Out-In	m	50	50	55	55	100	100	100	100	100	
	Max.Height			Out-In	m	30	30	30	30	30	30	30	30	30	
Guaranteed Operating Range (Outdoor)				Cooling ^(*)3)	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
				Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PCA-M KA SERIES

STANDARD INVERTER



Type				Inverter Heat Pump											
Indoor Unit				PCA-M35KA2	PCA-M50KA2	PCA-M60KA2	PCA-M71KA2	PCA-M100KA2	PCA-M100KA2	PCA-M125KA2	PCA-M125KA2	PCA-M140KA2	PCA-M140KA2		
Outdoor Unit				SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA2	PUZ-M100VKA2	PUZ-M125VKA2	PUZ-M125VKA2	PUZ-M140VKA2	PUZ-M140VKA2		
Refrigerant ^(*)				R32											
Power Source				Outdoor power supply											
Supply				VA-VKA:230/Single/50, YKA:400/Three/50											
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4		
		Min-Max	kW	0.8 ~ 3.9	1.5 ~ 5.6	1.6 ~ 6.3	2.2 ~ 8.1	4.0 ~ 10.6	4.0 ~ 10.6	5.7 ~ 13.0	5.7 ~ 13.0	5.7 ~ 14.1	5.7 ~ 14.1		
	Total Input	Rated	kW	0.900	1.515	1.648	1.972	2.941	2.941	4.019	4.019	5.360	5.360		
	EER			4.00	3.30	3.70	3.60	3.23	3.23	3.01	3.01	2.50	2.50		
	Design load		kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—		
	Annual electricity consumption ^(*)2)		kWh/a	198	291	333	381	553	553	—	—	—	—		
	SEER ^(*)4)			6.3	6.0	6.4	6.5	6.0	6.0	—	—	—	—		
	Energy efficiency class			A++	A+	A++	A++	A+	A+	—	—	—	—		
	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0		
		Min-Max	kW	1.0 ~ 5.0	1.5 ~ 7.2	1.6 ~ 8.0	2.0 ~ 10.2	2.8 ~ 12.5	2.8 ~ 12.5	4.1 ~ 15.0	4.1 ~ 15.0	4.2 ~ 15.8	4.2 ~ 15.8		
Total Input	Rated	kW	1.025	1.617	1.750	2.216	3.284	3.284	3.958	3.958	4.285	4.285			
COP			4.00	3.71	4.00	3.61	3.41	3.41	3.41	3.41	3.50	3.50			
Design load		kW	2.6	4.3	4.6	5.8	8.0	8.0	—	—	—	—			
Declared Capacity	at reference design temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	—	—	—	—			
	at bivalent temperature	kW	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	—	—	—	—			
	at operation limit temperature	kW	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	—	—	—	—			
Back up heating capacity		kW	0.3	0.5	0.5	0.6	2.0	2.0	—	—	—	—			
Annual electricity consumption ^(*)2)		kWh/a	910	1458	1558	1974	2729	2729	—	—	—	—			
SCOP ^(*)4)			4.0	4.1	4.1	4.1	4.1	4.1	—	—	—	—			
Energy efficiency class			A+	A+	A+	A+	A+	A+	—	—	—	—			
Operating Current(Max)				A	8.8	13.9	15.2	15.2	20.7	12.2	27.3	12.3	30.9	12.4	
Indoor Unit	Input [cooling / Heating]			Rated	kW	0.04 / 0.04	0.05 / 0.05	0.06 / 0.06	0.06 / 0.06	0.09 / 0.09	0.09 / 0.09	0.11 / 0.11	0.11 / 0.11	0.14 / 0.14	0.14 / 0.14
	Operating Current(Max)			A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	0.90	0.90	
	Dimensions			H*W*D	mm	230-960-680	230-1280-680	230-1280-680	230-1280-680	230-1600-680	230-1600-680	230-1600-680	230-1600-680		
	Weight			kg	25	26	32	32	37	37	38	40	40		
	Air Volume (Lo-Mi2-Mi1-Hi)			m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	24-26-29-32	24-26-29-32		
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)			dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	41-43-45-48	41-43-45-48		
	Sound Level (PWL)			dB(A)	60	60	60	62	63	63	65	65	68	68	
	Dimensions			H*W*D	mm	550-800-285	714-800-285	880-840-330	880-840-330	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	
	Weight			kg	35	41	54	55	76	78	84	85	84	85	
Outdoor Unit	Air Volume	Cooling	m³/min	34.3	45.8	50.1	50.1	79	79	86	86	86	86		
		Heating	m³/min	32.7	43.7	50.1	50.1	79	79	92	92	92	92		
	Sound Level (SPL)	Cooling	dB(A)	48	48	49	49	51	51	54	54	55	55		
		Heating	dB(A)	48	49	51	51	54	54	56	56	57	57		
	Sound Level (PWL)	Cooling	dB(A)	59	64	65	66	70	70	72	72	73	73		
		Heating	dB(A)	59	64	65	66	70	70	72	72	73	73		
	Operating Current(Max)			A	8.5	13.5	14.8	14.8	20	11.5	26.5	11.5	30	11.5	
	Breaker Size			A	10	20	20	20	32	16	32	16	40	16	
	Ext.Piping Diameter ^(*)3)				Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Max.Length				Out-In	m	20	30	30	30	55	65	65	65	65	
Max.Height				Out-In	m	12	30	30	30	30	30	30	30	30	
Guaranteed Operating Range (Outdoor)				Cooling ^(*)3)	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
				Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PCA-M35/50/60/71/100/125/140KA2

Outdoor Unit

R410A

For Single



PUHZ-ZRP35/50 PUHZ-ZRP60/71 PUHZ-ZRP100/125/140

R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-ZRP100/125/140/200/250

Remote Controller



Optional



Optional



Optional



Optional



Optional*

* PAR-SA9CA is also required.

PCA-M KA Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR-E			MSDD-50WR-E		MSDT-111R-E			MSDF-111R-E		

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PCA-M35/50/60/71/100/125/140KA2

Outdoor Unit

R410A

For Single



SUZ-KA35 SUZ-KA50/60/71 PUHZ-P100/125/140

R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-P100/125/140 PUHZ-P200/250

Remote Controller



Optional



Optional



Optional



Optional



Optional*

* PAR-SA9CA is also required.

PCA-M KA Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P&SUZ)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E			MSDD-50WR-F		MSDT-111R-E			MSDF-111R-F	

PCA-M KA SERIES

POWER INVERTER



Type			Inverter Heat Pump										
Indoor Unit			PCA-M35KA2	PCA-M50KA2	PCA-M60KA2	PCA-M71KA2	PCA-M100KA2	PCA-M100KA2	PCA-M125KA2	PCA-M125KA2	PCA-M140KA2	PCA-M140KA2	
Outdoor Unit			PUHZ-ZRP35VA2	PUHZ-ZRP50VA2	PUHZ-ZRP60VA2	PUHZ-ZRP71VHA2	PUHZ-ZRP100VA3	PUHZ-ZRP100YA3	PUHZ-ZRP125VA3	PUHZ-ZRP125YA3	PUHZ-ZRP140VA3	PUHZ-ZRP140YA3	
Refrigerant ⁽¹⁾			R410A										
Power Supply	Source		Outdoor power supply										
Cooling	Capacity	Outdoor(V/Phase/Hz)	VKA-VHA-230/Single/50, YKA-400/Three/50										
		Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
		Rated	kW	0.857	1.351	1.694	1.821	2.417	2.435	3.980	3.980	3.952	3.952
		EER		4.19	3.73	3.67	3.90	3.93	3.90	3.14	3.14	3.39	3.39
		Design load	kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—
		Annual electricity consumption ⁽²⁾	kWh/a	202	282	340	367	542	553	—	—	—	—
		SEER ⁽⁴⁾		6.2	6.1	6.2	6.7	6.1	6.0	—	—	—	—
			Energy efficiency class	A++	A++	A++	A++	A++	A+	—	—	—	—
Heating	Capacity	Rated	kW	4.1	5.5	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
			Min-Max	kW	1.6 - 5.2	2.5 - 6.6	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0
		Rated	kW	1.019	1.450	1.930	2.197	3.043	3.043	3.804	3.804	4.571	4.571
		COP		4.02	3.79	3.63	3.64	3.68	3.68	3.68	3.68	3.50	3.50
		Design load	kW	2.4	3.8	4.4	4.7	7.8	7.8	—	—	—	—
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—
		Back up heating capacity	kW	0.0	0.0	0.0	0.0	0.0	0.0	—	—	—	—
		Annual electricity consumption ⁽²⁾	kWh/a	817	1259	1461	1522	2784	2785	—	—	—	—
	SCOP ⁽⁴⁾		4.1	4.2	4.2	4.3	3.9	3.9	—	—	—	—	
		Energy efficiency class	A+	A+	A+	A+	A	A	—	—	—	—	
Operating Current(Max)			A	13.3	13.4	19.4	19.4	27.2	8.7	27.3	10.3	28.9	13.9
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.04 / 0.04	0.05 / 0.05	0.06 / 0.06	0.06 / 0.06	0.09 / 0.09	0.09 / 0.09	0.11 / 0.11	0.11 / 0.11	0.14 / 0.14	0.14 / 0.14
			A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	0.90	0.90
		Dimensions	H*W*D	mm	230-960-680	230-1280-680	230-1280-680	230-1600-680	230-1600-680	230-1600-680	230-1600-680	230-1600-680	
		Weight	kg	25	26	32	32	37	37	38	38	40	
		Air Volume (Lo-Mi2-Mi1-Hi)	m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	23-25-27-29	24-26-29-32	24-26-29-32
		Sound Level (Lo-Mi2-Mi1-Hi) (SPL)	dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	39-41-43-45	41-43-45-48	41-43-45-48
		Sound Level (PWL)	dB(A)	60	60	60	62	63	63	65	65	68	68
	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+30)	943-950-330(+25)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)
			Weight	kg	43	46	70	70	116	123	116	125	118
	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120	120
Heating		m³/min	45	45	55	55	110	110	120	120	120	120	
Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50	
	Heating	dB(A)	46	46	48	48	51	51	52	52	52	52	
Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70	
	Heating	dB(A)	65	65	67	67	69	69	70	70	70	70	
Operating Current(Max)	Rated	A	13	13	19	19	26.5	8	26.5	9.5	28	13	
		Breaker Size	A	16	16	25	25	32	16	32	16	40	16
Ext.Piping	Diameter ⁽³⁾	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
		Out-In	m	50	50	50	50	75	75	75	75	75	75
	Max.Length	Out-In	m	30	30	30	30	30	30	30	30	30	30
		Max.Height	Out-In	m	30	30	30	30	30	30	30	30	30
Guaranteed Operating Range (Outdoor)	Cooling ⁽³⁾		°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
	Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PCA-M KA SERIES

STANDARD INVERTER



Type			Inverter Heat Pump											
Indoor Unit			PCA-M35KA2	PCA-M50KA2	PCA-M60KA2	PCA-M71KA2	PCA-M100KA2	PCA-M100KA2	PCA-M125KA2	PCA-M125KA2	PCA-M140KA2	PCA-M140KA2		
Outdoor Unit			SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6	SUZ-KA71VA6	PUHZ-P100VA	PUHZ-P100YA	PUHZ-P125VA	PUHZ-P125YA	PUHZ-P140VA	PUHZ-P140YA		
Refrigerant ⁽¹⁾			R410A											
Power Supply			Outdoor power supply											
Cooling			VA-VKA-230/Single/50, YKA-400/Three/50											
Capacity	Capacity	Rated	kW	3.6	5.0	5.7	7.1	9.4	9.4	12.1	12.1	13.6	13.6	
		Min-Max	kW	1.4 ~ 3.9	2.3 ~ 5.6	2.3 ~ 6.3	2.8 ~ 8.1	3.7 ~ 10.6	3.7 ~ 10.6	5.6 ~ 13.0	5.6 ~ 13.0	5.8 ~ 14.1	5.8 ~ 14.1	
	Total Input	Rated	kW	1.050	1.547	1.722	2.057	3.051	3.051	4.245	4.245	5.643	5.643	
		EER		3.43	3.23	3.31	3.45	3.08	3.08	2.85	2.85	2.41	2.41	
	Design load		kW	3.6	5.0	5.7	7.1	9.4	9.4	—	—	—	—	
		Annual electricity consumption ⁽²⁾	kWh/a	209	299	325	408	584	584	—	—	—	—	
	SEER ⁽⁴⁾			6.0	5.8	6.1	6.0	5.6	5.6	—	—	—	—	
		Energy efficiency class		A+	A+	A++	A+	A+	A+	—	—	—	—	
	Heating	Capacity	Rated	kW	4.1	5.5	6.9	7.9	11.2	11.2	13.5	13.5	15.0	15.0
			Min-Max	kW	1.7 ~ 5.0	1.7 ~ 6.6	2.5 ~ 8.0	2.6 ~ 10.2	2.8 ~ 12.5	2.8 ~ 12.5	4.8 ~ 15.0	4.8 ~ 15.0	4.9 ~ 15.8	4.9 ~ 15.8
Total Input		Rated	kW	1.051	1.519	1.911	2.182	3.373	3.373	4.066	4.066	4.477	4.477	
		COP		3.90	3.62	3.61	3.62	3.32	3.32	3.32	3.32	3.35	3.35	
Design load			kW	2.6	4.0	4.8	5.8	8.0	8.0	—	—	—	—	
		Declared Capacity	at reference design temperature	kW	2.3 (-10°C)	3.6 (-10°C)	4.0 (-10°C)	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	—	—	—	—
at bivalent temperature			kW	2.3 (-7°C)	3.6 (-7°C)	4.3 (-7°C)	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	—	—	—	—	
at operation limit temperature			kW	2.3 (-10°C)	3.6 (-10°C)	4.0 (-10°C)	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	—	—	—	—	
Back up heating capacity			kW	0.3	0.4	0.8	0.6	2.0	2.0	—	—	—	—	
		Annual electricity consumption ⁽²⁾	kWh/a	886	1388	1680	2029	2729	2729	—	—	—	—	
SCOP ⁽⁴⁾			4.1	4.0	4.0	4.0	4.1	4.1	—	—	—	—		
	Energy efficiency class		A+	A+	A+	A+	A+	A+	—	—	—	—		
Operating Current(Max)			A	8.5	12.4	14.4	16.5	20.7	12.2	27.3	12.3	30.9	12.4	
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.04 / 0.04	0.05 / 0.05	0.06 / 0.06	0.06 / 0.06	0.09 / 0.09	0.09 / 0.09	0.11 / 0.11	0.11 / 0.11	0.14 / 0.14	0.14 / 0.14	
			A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	0.90	0.90	
	Dimensions	H*W*D	mm	230-960-680			230-1280-680			230-1600-680				
			kg	25	26	32	32	37	37	38	38	40	40	
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	23-25-27-29	24-26-29-32	24-26-29-32	
			dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	39-41-43-45	41-43-45-48	41-43-45-48	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	60	60	60	62	63	63	65	65	68	68	
			dB(A)	60	60	60	62	63	63	65	65	68	68	
	Outdoor Unit	Dimensions	H*W*D	mm	550-800-285	880-840-330	880-840-330	880-840-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330
				kg	35	54	50	53	76	78	84	85	84	85
Air Volume		Cooling	m³/min	36.3	44.6	40.9	50.1	79	79	86	86	86	86	
			Heating	34.8	44.6	49.2	48.2	79	79	92	92	92	92	
Sound Level (SPL)		Cooling	dB(A)	49	52	55	55	51	51	54	54	56	56	
			Heating	50	52	55	55	54	54	56	56	57	57	
Sound Level (PWL)		Cooling	dB(A)	62	65	65	69	70	70	72	72	75	75	
			Heating	62	65	65	69	70	70	72	72	75	75	
Operating Current(Max)			A	8.2	12	14	16.1	20	11.5	26.5	11.5	30	11.5	
			Breaker Size	A	10	20	20	20	32	16	32	16	40	16
Ext.Piping	Diameter ⁽³⁾	Liquid/Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
		Out-In	m	20	30	30	30	50	50	50	50	50	50	
	Max.Length	Out-In	m	12	30	30	30	30	30	30	30	30	30	
		Max.Height												
Guaranteed Operating Range (Outdoor)			Cooling ⁽³⁾	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
			Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

R32
R410A

PCA-HA SERIES

PCA-M71HA2

Standard features include a strong carbon-black stainless steel body and built-in oil mist filter to prevent oil from getting into the unit providing a comfortable air conditioning environment in kitchens that use open-flame cooking.



Tough on Oily Smoke


A durable stainless steel casing that is resistant to oil and grease is provided to protect the surface of the body. Grimy dirt and stains are removed easily, enabling the unit to be kept clean at all times.

High-performance Oil Mist Filter


A high-performance heavy-duty oil mist filter is included as standard equipment. The filtering system is more efficient than conventional filters, thereby effectively reducing the oily smoke entering the air conditioner. The filter is disposable, thereby enabling trouble-free cleaning and maintenance.

Oil Mist Filter Cleaning

When used in kitchens, the oil mist filter should be replaced once every two months. The system comes with 12 filter elements. After these have been used, optional elements (PAC-SG38KF-E) can be purchased.



Oil mist filter



Pull the handle to easily slide the filter out


Easy Maintenance – Even for Cleaning the Fan

A separate fan casing that can be disassembled in sections is adopted to ensure easy fan cleaning. Drain pan cleaning onsite is also no problem owing to the use of a pipe connector that is easily removed.




Cosmetic Front and Hanging Fixture Covers (Option)

Cosmetic covers are available to prevent the collection of dust and grime on the main body and hanging fixture sections.

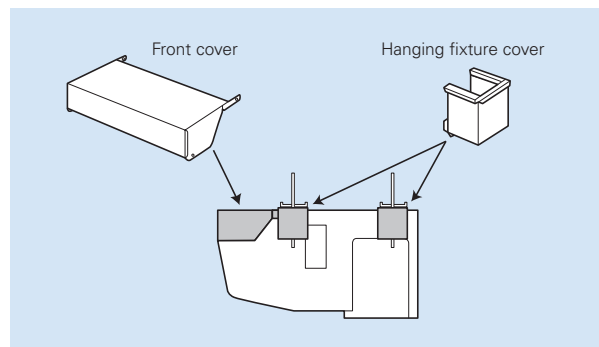

Fresh Outside-air Intake (Option)

There is a knock-out opening on the rear panel of the unit that can be used to bring fresh air into the unit. This helps to improve ventilation and make the kitchen comfortable.

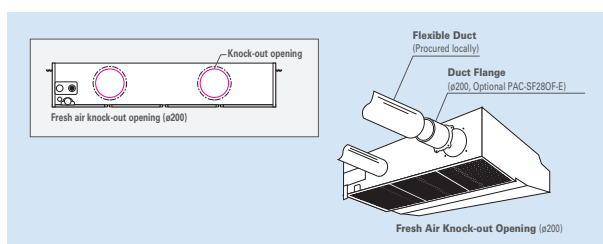

- Notes: 1) A fresh-air duct flange is required (sold separately)
2) Intake air is not 100% fresh (outside) air.

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PCA-M71HA2

Outdoor Unit

R32

For Single



PUZ-ZM71

R32

For Multi
(Twin/Triple)



PUZ-ZM140/250

Remote Controller



Optional



Optional



Optional



Optional*

* PAR-SA9CA is also required.

PCA-M HA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		—	—	—	71x1	—	—	—	—	—	—	—	—	71x2	—	—	—	—	71x3	—	—
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	—	MSDD-60TR2-E	—	—	—	—	MSDT-111R3-E	—	—

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PCA-M71HA2

Outdoor Unit

R410A


For Single



PUHZ-ZRP71

R410A

For Multi
(Twin/Triple)



PUHZ-ZRP140/250

Remote Controller



Optional



Optional



Optional



Optional*


* PAR-SA9CA is also required.

PCA-M HA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		—	—	—	71x1	—	—	—	—	—	—	—	71x2	—	—	—	—	—	71x3	—	—
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	MSDD-60TR-E	—	—	—	—	—	MSDT-111R-E	—	—

PCA-RP HA SERIES

POWER INVERTER



Type				Inverter Heat Pump	
Indoor Unit				PCA-M71HA2	
Outdoor Unit				PUZ-ZM71VHA2	
Refrigerant ⁽¹⁾				R32	
Power Source				Outdoor power supply	
Supply Outdoor(V/Phase/Hz)				230/Single/50	
Cooling	Capacity	Rated	kW	7.1	
		Min-Max	kW	3.3 - 8.1	
	Total Input	Rated	kW	2,028	
	EER			3.50	
	Design load		kW	7.1	
	Annual electricity consumption ⁽²⁾		kWh/a	443	
	SEER ⁽⁴⁾			5.6	
				Energy efficiency class	
Heating	Capacity	Rated	kW	7.6	
		Min-Max	kW	3.5 - 10.2	
	Total Input	Rated	kW	2,171	
	COP			3.50	
	Design load		kW	4.7	
	Declared Capacity	at reference design temperature	kW	4.7 (-10°C)	
		at bivalent temperature	kW	4.7 (-10°C)	
		at operation limit temperature	kW	3.4 (-20°C)	
	Back up heating capacity		kW	0.0	
	Annual electricity consumption ⁽²⁾		kWh/a	1684	
	SCOP ⁽⁴⁾			3.9	
				Energy efficiency class	
Operating Current(Max)				A	
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.10 / 0.10	
			A	0.43	
	Operating Current(Max)		A	0.43	
	Dimensions	H*W*D	mm	280-1136-650	
	Weight		kg	42	
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	16-18	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	37-39	
	Sound Level (PWL)		dB(A)	57	
	Dimensions	H*W*D	mm	943-950-330(+25)	
	Weight		kg	67	
Outdoor Unit	Air Volume	Cooling	m³/min	55	
		Heating	m³/min	55	
	Sound Level (SPL)	Cooling	dB(A)	47	
		Heating	dB(A)	49	
	Sound Level (PWL)	Cooling	dB(A)	67	
		Heating	dB(A)	67	
	Operating Current(Max)		A	19	
	Breaker Size		A	25	
	Diameter ⁽³⁾	Liquid/Gas	mm	9.52 / 15.88	
	Max.Length	Out-In	m	55	
Ext.Piping	Max.Length	Out-In	m	30	
	Max.Height		m	30	
	Guaranteed Operating Range (Outdoor)	Cooling ⁽²⁾	°C	-15 ~ +46	
				Heating	
				°C	
				-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.


*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PCA-RP HA SERIES

POWER INVERTER



Type				Inverter Heat Pump	
Indoor Unit				PCA-M71HA2	
Outdoor Unit				PUHZ-ZRP71VHA2	
Refrigerant ⁽¹⁾				R410A	
Power Source				Outdoor power supply	
Supply Outdoor(V/Phase/Hz)				230/Single/50	
Cooling	Capacity	Rated	kW	7.1	
		Min-Max	kW	3.3 - 8.1	
	Total Input	Rated	kW	2,170	
	EER			3.27	
	Design load		kW	7.1	
	Annual electricity consumption ⁽²⁾		kWh/a	444	
	SEER ⁽⁴⁾			5.6	
				Energy efficiency class	
Heating	Capacity	Rated	kW	7.6	
		Min-Max	kW	3.5 - 10.2	
	Total Input	Rated	kW	2,350	
	COP			3.23	
	Design load		kW	4.7	
	Declared Capacity	at reference design temperature	kW	4.7 (-10°C)	
		at bivalent temperature	kW	4.7 (-10°C)	
		at operation limit temperature	kW	3.5 (-20°C)	
	Back up heating capacity		kW	0.0	
	Annual electricity consumption ⁽²⁾		kWh/a	1724	
	SCOP ⁽⁴⁾			3.8	
				Energy efficiency class	
Operating Current(Max)				A	
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.10 / 0.10	
			A	0.43	
	Operating Current(Max)		A	0.43	
	Dimensions	H*W*D	mm	280-1136-650	
	Weight		kg	42	
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	16-18	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	37-39	
	Sound Level (PWL)		dB(A)	57	
	Dimensions	H*W*D	mm	943-950-330(+30)	
	Weight		kg	70	
Outdoor Unit	Air Volume	Cooling	m³/min	55	
		Heating	m³/min	55	
	Sound Level (SPL)	Cooling	dB(A)	47	
		Heating	dB(A)	48	
	Sound Level (PWL)	Cooling	dB(A)	67	
		Heating	dB(A)	67	
	Operating Current(Max)		A	19	
	Breaker Size		A	25	
	Diameter ⁽³⁾	Liquid/Gas	mm	9.52 / 15.88	
	Max.Length	Out-In	m	50	
Ext.Piping	Max.Length	Out-In	m	30	
	Max.Height		m	30	
	Guaranteed Operating Range (Outdoor)	Cooling ⁽²⁾	°C	-15 ~ +46	
				Heating	
				°C	
				-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PSA SERIES

PSA-M71/100/125/140KA

R32
R410A



Installation of this floor-standing series is easy and quick.
An excellent choice when there is a sudden need for an air conditioner to be installed.

A slim design the fits neatly into any space

With a width of only 600mm, this slim unit can fit neatly into narrow spaces.




Built-in MA smart remote controller

The large and easy-to-read LCD makes it easy to perform a variety of functions.



Equipped with a long-life filter as standard

The adoption of a grille that can be opened allows the filter to be easily removed.

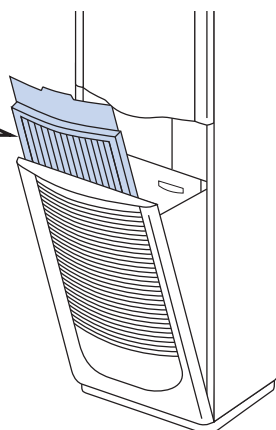


A wide airflow range with horizontal swinging

The horizontal swinging function can be turned on or off via the remote controller to deliver comfort over a wider area.

Automatic swinging in the horizontal direction


The horizontal-swinging louvers provide wide coverage for improved comfort.

Airflow can also be adjusted manually in the vertical direction.



Floor-standing Line-up

The PSA series was previously only able to be connected to P series outdoor units. However, it can now also be connected to S series outdoor units. This wider lineup provides our customers with a more flexible range of options.

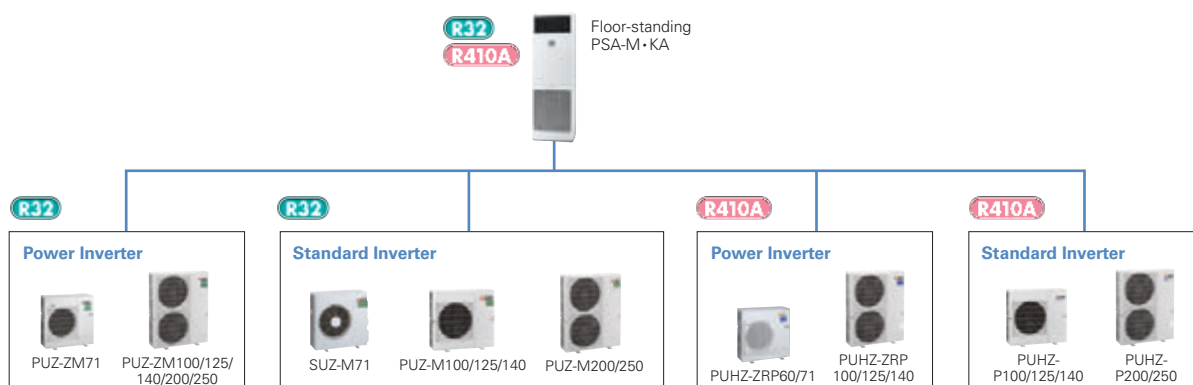

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PSA-M71/100/125/140KA

Outdoor Unit

R32

For Single



PUZ-ZM71



PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple)



PUZ-ZM140/200/250

Remote Controller



Built-in



Optional*

* PAR-SA9CA-E is also required.

PSA-M Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		—	—	—	71x1	100x1	125x1	140x1	—	—	—	—	71x2	100x2	125x2	—	—	71x3	—	—	
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E	MSDD-50WR2-E	—	—	—	MSDT-111R3-E	—	—	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PSA-M71/100/125/140KA

Outdoor Unit

R32

For Single



SUZ-M71



PUZ-M100/125/140

R32

For Multi
(Twin/Triple)



PUZ-M140



PUZ-M200/250

Remote Controller



Built-in



Optional*


* PAR-SA9CA-E is also required.

PSA-M Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUZ-M)		—	—	—	71x1	100x1	125x1	140x1	—	—	—	—	—	71x2	100x2	125x2	—	—	71x3	—	—
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E	MSDD-50WR2-E	—	—	MSDT-111R3-E	—	—	

PSA-M SERIES

POWER INVERTER



Type				Inverter Heat Pump							
Indoor Unit				PSA-M71KA	PSA-M100KA	PSA-M100KA	PSA-M125KA	PSA-M125KA	PSA-M140KA	PSA-M140KA	
Outdoor Unit				PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM100VKA2	PUZ-ZM125VKA2	PUZ-ZM125VKA2	PUZ-ZM140VKA2	PUZ-ZM140VKA2	
Refrigerant ⁽¹⁾				R32							
Power Source				Outdoor power supply							
Supply Outdoor(V/Phase/Hz)				VKA-VHA:230/Single/50, YKA:400/Three/50							
Cooling	Capacity	Rated	kW	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
		Min-Max	kV	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0	
	Total Input	Rated	kV	1.888	2.493	2.493	3.955	3.955	3.976	3.976	
	EER			3.76	3.81	3.81	3.16	3.16	3.37	3.37	
	Design load		kW	7.1	9.5	9.5	—	—	—	—	
	Annual electricity consumption ⁽²⁾		kWh/a	388	581	592	—	—	—	—	
Heating	SEER ⁽⁴⁾			6.4	5.7	5.6	—	—	—	—	
	Energy efficiency class			A++	A+	A+	—	—	—	—	
	Capacity	Rated	kW	7.6	11.2	11.2	14.0	14.0	16.0	16.0	
		Min-Max	kV	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5 - 16.0	5 - 16.0	5.7 - 18.0	5.7 - 18.0	
	Total Input	Rated	kV	2.338	3.172	3.172	4.501	4.501	5.000	5.000	
	COP			3.25	3.53	3.53	3.11	3.11	3.20	3.20	
	Design load		kW	4.7	7.8	7.8	—	—	—	—	
	Declared Capacity	at reference design temperature	kW	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—	
		at bivalent temperature	kW	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—	
		at operation limit temperature	kW	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—	
	Back up heating capacity		kW	0.0	0.0	0.0	—	—	—	—	
	Annual electricity consumption ⁽²⁾		kWh/a	1636	2658	2659	—	—	—	—	
	SCOP ⁽⁴⁾			4.0	4.1	4.1	—	—	—	—	
	Energy efficiency class			A+	A+	A+	—	—	—	—	
Operating	Current(Max)		A	19.4	20.7	8.7	27.2	9.7	30.7	12.5	
Indoor Unit	Input (cooling / Heating)	Rated	kV	0.06 / 0.06	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	
	Operating Current(Max)		A	0.4	0.71	0.71	0.73	0.73	0.73	0.73	
	Dimensions	H*W*D	mm	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	
	Weight		kg	46	46	46	46	46	48	48	
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	20-22-24	25-28-30	25-28-30	25-28-31	25-28-31	25-28-31	25-28-31	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	40-42-44	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	
	Sound Level (PWL)		dB(A)	60	65	65	66	66	66	66	
	Dimensions	H*W*D	mm	943-950-330(+25)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	
	Weight		kg	67	105	111	105	114	105	118	
	Air Volume	Cooling	m³/min	55	110	110	120	120	120	120	
Outdoor Unit		Heating	m³/min	55	110	110	120	120	120	120	
	Sound Level (SPL)	Cooling	dB(A)	47	49	49	50	50	50	50	
		Heating	dB(A)	49	51	51	52	52	52	52	
	Sound Level (PWL)	Cooling	dB(A)	67	69	69	70	70	70	70	
		Heating	dB(A)	67	69	69	70	70	70	70	
	Operating Current(Max)		A	19	20	8	26.5	9	30	11.8	
	Breaker Size		A	25	32	16	32	16	40	16	
	Ext.Piping Diameter ⁽³⁾	Liquid/Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max.Length	Out-In	m	55	100	100	100	100	100	100	
	Max.Height	Out-In	m	30	30	30	30	30	30	30	
Guaranteed Operating Range (Outdoor)				Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
				Heating	°C	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	


*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

PSA-M SERIES

STANDARD INVERTER



Type				Inverter Heat Pump							
Indoor Unit				PSA-M71KA	PSA-M100KA	PSA-M100KA	PSA-M125KA	PSA-M125KA	PSA-M140KA	PSA-M140KA	
Outdoor Unit				SUZ-M71VA	PUZ-M100VKA2	PUZ-M100VKA2	PUZ-M125VKA2	PUZ-M125VKA2	PUZ-M140VKA2	PUZ-M140VKA2	
Refrigerant ⁽¹⁾				R32							
Power Source				Outdoor power supply							
Supply Outdoor(V/Phase/Hz)				VA, VKA:230/Single/50, YKA:400/Three/50							
Cooling	Capacity	Rated	kW	7.1	9.4	9.4	12.1	12.1	13.6	13.6	
		Min-Max	kV	2.2 - 8.1	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 13.7	5.8 - 13.7	
	Total Input	Rated	kV	1.972	2.686	2.686	4.481	4.481	5.037	5.037	
	EER			3.60	3.50	3.50	2.70	2.70	2.70	2.70	
	Design load		kW	7.1	9.4	9.4	—	—	—	—	
	Annual electricity consumption ⁽²⁾		kWh/a	394	591	591	—	—	—	—	
Heating	SEER ⁽⁴⁾			6.3	5.5	5.5	—	—	—	—	
	Energy efficiency class			A++	A	A	—	—	—	—	
	Capacity	Rated	kW	8.0	11.2	11.2	13.5	13.5	15.0	15.0	
		Min-Max	kV	2.1 - 10.2	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8	4.9 - 15.8	
	Total Input	Rated	kV	2.492	3.246	3.246	4.355	4.355	4.761	4.761	
	COP			3.21	3.45	3.45	3.10	3.10	3.15	3.15	
	Design load		kW	5.8	8.0	8.0	—	—	—	—	
	Declared Capacity	at reference design temperature	kW	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	—	—	—	—	
		at bivalent temperature	kW	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	—	—	—	—	
		at operation limit temperature	kW	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	—	—	—	—	
	Back up heating capacity		kW	0.6	2.0	2.0	—	—	—	—	
	Annual electricity consumption ⁽²⁾		kWh/a	2003	2745	2745	—	—	—	—	
	SCOP ⁽⁴⁾			4.0	4.0	4.0	—	—	—	—	
	Energy efficiency class			A+	A+	A+	—	—	—	—	
Operating	Current(Max)		A	15.2	20.7	12.2	27.2	12.2	30.7	12.2	
Indoor Unit	Input (cooling / Heating)	Rated	kV	0.06 / 0.06	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	
	Operating Current(Max)		A	0.4	0.71	0.71	0.73	0.73	0.73	0.73	
	Dimensions	H*W*D	mm	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	
	Weight		kg	46	46	46	46	46	48	48	
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	20-22-24	25-28-30	25-28-30	25-28-31	25-28-31	25-28-31	25-28-31	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	40-42-44	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	
	Sound Level (PWL)		dB(A)	60	65	65	66	66	66	66	
	Dimensions	H*W*D	mm	880-840-330	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	
	Weight		kg	55	76	78	84	85	84	85	
	Air Volume	Cooling	m³/min	50.1	79	79	92	92	92	92	
Outdoor Unit		Heating	m³/min	50.1	79	79	92	92	92	92	
	Sound Level (SPL)	Cooling	dB(A)	49	51	51	54	54	55	55	
		Heating	dB(A)	51	54	54	56	56	57	57	
	Sound Level (PWL)	Cooling	dB(A)	66	70	70	72	72	73	73	
		Heating	dB(A)	66	70	70	72	72	73	73	
	Operating Current(Max)		A	14.8	20	11.5	26.5	11.5	30	11.5	
	Breaker Size		A	20	32	16	32	16	40	16	
	Ext.Piping Diameter ⁽³⁾	Liquid/Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max.Length	Out-In	m	30	55	55	65	65	65	65	
	Max.Height	Out-In	m	30	30	30	30	30	30	30	
Guaranteed Operating Range (Outdoor)				Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
				Heating	°C	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PSA-M71/100/125/140KA

Outdoor Unit

R410A

For Single



PUHZ-ZRP71



PUHZ-ZRP100/125/140

R410A

For Multi
(Twin/Triple)



PUHZ-ZRP140/200/250

Remote Controller



Built-in



Optional*

* PAR-SA9CA-E is also required.

PSA-M Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		—	—	—	71x1	100x1	125x1	140x1	—	—	—	—	—	71x2	100x2	125x2	—	—	71x3	—	—
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E	MSDD-50WR-E	—	—	MSDT-111R-E	—	—	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PSA-M71/100/125/140KA

Outdoor Unit

R410A

For Single



PUHZ-P100/125/140

R410A

For Multi
(Twin/Triple)



PUHZ-P140



PUHZ-P200/250

Remote Controller



Built-in



Optional*


* PAR-SA9CA-E is also required.

PSA-M Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P)		—	—	—	—	100x1	125x1	140x1	—	—	—	—	71x2	100x2	125x2	—	—	71x3	—	—	
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E	MSDD-50WR-E	—	—	MSDT-111R-F	—	—		

PSA-RP SERIES

POWER INVERTER



Type	Inverter Heat Pump							
Indoor Unit								
Outdoor Unit								
Refrigerant ⁽¹⁾	R410A							
Power Supply	Outdoor power supply							
Cooling	Capacity	Rated	kW	7.1	9.5	9.5	12.5	12.5
		Min-Max	kW	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0
	Total Input	Rated	kW	1.890	2.500	2.500	4.084	4.084
	EER			3.76	3.80	3.80	3.06	3.06
	Design load		kW	7.1	9.5	9.5	12.5	12.5
	Annual electricity consumption ⁽²⁾		kWh/a	394	584	595	—	—
	SEER ⁽⁴⁾			6.3	5.6	5.5	—	—
	Energy efficiency class			A++	A+	A	—	—
Heating	Capacity	Rated	kW	7.6	11.2	11.2	14.0	14.0
		Min-Max	kW	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0
	Total Input	Rated	kW	2.210	3.080	3.080	4.242	4.242
	COP			3.44	3.64	3.64	3.30	3.30
	Design load		kW	4.7	7.8	7.8	—	—
	Declared Capacity	at reference design temperature	kW	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—
		at bivalent temperature	kW	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—
		at operation limit temperature	kW	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—
	Back up heating capacity		kW	0.0	0.0	0.0	—	—
	Annual electricity consumption ⁽²⁾		kWh/a	1668	2730	2731	—	—
	SCOP ⁽⁴⁾			3.9	3.9	3.9	—	—
	Energy efficiency class			A	A	A	—	—
Operating Current(Max)		A		19.4	27.2	8.7	27.2	10.2
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.06 / 0.06	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11
	Operating Current(Max)		A	0.4	0.71	0.71	0.73	0.73
	Dimensions	H*W*D	mm	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360
	Weight		kg	46	46	46	46	48
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	20-22-24	25-28-30	25-28-31	25-28-31	25-28-31
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	40-42-44	45-49-51	45-49-51	45-49-51	45-49-51
	Sound Level (PWL)		dB(A)	60	65	65	66	66
Outdoor Unit	Dimensions	H*W*D	mm	943-950-330(+30)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)
	Weight		kg	70	116	123	116	125
	Air Volume	Cooling	m³/min	55	110	110	120	120
		Heating	m³/min	55	110	110	120	120
	Sound Level (SPL)	Cooling	dB(A)	47	49	49	50	50
		Heating	dB(A)	48	51	51	52	52
	Sound Level (PWL)	Cooling	dB(A)	67	69	69	70	70
	Operating Current(Max)		A	19	26.5	8	26.5	9.5
	Breaker Size		A	25	32	16	32	16
Ext.Piping	Diameter ⁽³⁾	Liquid/Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	50	75	75	75	75
	Max.Height	Out-In	m	30	30	30	30	30
Guaranteed Operating Range (Outdoor)	Cooling ⁽³⁾	°C		-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
	Heating	°C		-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.


*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PSA-RP SERIES

STANDARD INVERTER



Type	Inverter Heat Pump							
Indoor Unit								
Outdoor Unit								
Refrigerant ⁽¹⁾	R410A							
Power Supply	Outdoor power supply							
Cooling	Capacity	Rated	kW	9.4	9.4	12.1	12.1	13.6
		Min-Max	kW	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 13.7
	Total Input	Rated	kW	3.122	3.122	5.020	5.020	6.384
	EER			3.01	3.01	2.41	2.41	2.13
	Design load		kW	9.4	9.4	—	—	—
	Annual electricity consumption ⁽²⁾		kWh/a	644	644	—	—	—
	SEER ⁽⁴⁾			5.1	5.1	—	—	—
	Energy efficiency class			A	A	—	—	—
Heating	Capacity	Rated	kW	11.2	11.2	13.5	13.5	15.0
		Min-Max	kW	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8
	Total Input	Rated	kW	3.284	3.284	4.804	4.804	4.823
	COP			3.41	3.41	2.81	2.81	3.11
	Design load		kW	8.0	8.0	—	—	—
	Declared Capacity	at reference design temperature	kW	6.0 (-10°C)	6.0 (-10°C)	—	—	—
		at bivalent temperature	kW	7.0 (-7°C)	7.0 (-7°C)	—	—	—
		at operation limit temperature	kW	4.5 (-15°C)	4.5 (-15°C)	—	—	—
	Back up heating capacity		kW	2.0	2.0	—	—	—
	Annual electricity consumption ⁽²⁾		kWh/a	2797	2797	—	—	—
	SCOP ⁽⁴⁾			4.0	4.0	—	—	—
	Energy efficiency class			A+	A+	—	—	—
Operating Current(Max)		A		20.7	12.2	27.2	12.2	30.7
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11
	Operating Current(Max)		A	0.71	0.71	0.73	0.73	0.73
	Dimensions	H*W*D	mm	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360
	Weight		kg	46	46	46	46	48
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	25-28-30	25-28-30	25-28-31	25-28-31	25-28-31
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51
	Sound Level (PWL)		dB(A)	65	65	66	66	66
Outdoor Unit	Dimensions	H*W*D	mm	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330
	Weight		kg	76	78	84	85	85
	Air Volume	Cooling	m³/min	79	79	86	86	86
		Heating	m³/min	79	79	92	92	92
	Sound Level (SPL)	Cooling	dB(A)	51	51	54	54	56
		Heating	dB(A)	54	54	56	56	57
	Sound Level (PWL)	Cooling	dB(A)	70	70	72	72	75
	Operating Current(Max)		A	20	11.5	26.5	11.5	30
	Breaker Size		A	32	16	32	16	40
Ext.Piping	Diameter ⁽³⁾	Liquid/Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	50	50	50	50	50
	Max.Height	Out-In	m	30	30	30	30	30
Guaranteed Operating Range (Outdoor)	Cooling ⁽³⁾	°C		-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
	Heating	°C		-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.