

S

SERIES



SELECTION

Series line-up consists of two types of indoor units.
Choose the model that best matches room conditions.

SELECT INDOOR UNIT

Select the optimal unit and capacity required to match room construction and air conditioning requirements.

R32
R410A



Units without Remote Controller

SLZ-M15FA2
(Multi split series connection only)
SLZ-M25FA2
SLZ-M35FA2
SLZ-M50FA2
SLZ-M60FA2

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Plasma Quad Connect
SLP-2FA				
SLP-2FAL	✓			
SLP-2FAE		✓		
SLP-2FALE	✓	✓		
SLP-2FALM2	✓		✓	
SLP-2FALME2	✓	✓	✓	
SLP-2FAP				✓
SLP-2FALP	✓			✓
SLP-2FALMP2	✓		✓	✓

R32
R410A



Units without Remote Controller

SEZ-M25DA2
SEZ-M35DA2
SEZ-M50DA2
SEZ-M60DA2
SEZ-M71DA2

Units with Wireless Remote Controller

SEZ-M25DAL2
SEZ-M35DAL2
SEZ-M50DAL2
SEZ-M60DAL2
SEZ-M71DAL2

R32



Units without Remote Controller

SFZ-M25VA
SFZ-M35VA
SFZ-M50VA
SFZ-M60VA
SFZ-M71VA

SELECT OUTDOOR UNIT

There is one outdoor unit for respective indoor units.

R32



SUZ-M25/35VA

R32



SUZ-M50VA

R32



SUZ-M60/71VA

*To confirm compatibility with the MXZ Series multi-type system, refer to the MXZ Series page.

SLZ SERIES

R32

R410A


SLZ-M15/25/35/50/60FA2

Compact, lightweight ceiling cassette units with 4-way air outlets provide maximum comfort by evenly distributing airflow throughout the entire room.



2x2 Cassette Line-up

The SLZ series was previously only able to be connected to standard inverters and some power inverters. However, it can now also be connected to low-capacity power inverters. The ability to connect to a high-performance power inverter allows us to offer a wider range of options to our customers.

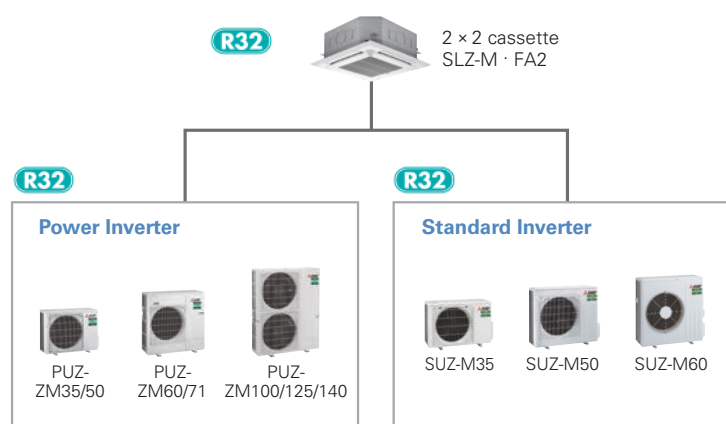


New lineup

1.5kW has been introduced for multi connection. The diverse selection enables the best solution for both customer and location.

Capacity	15	25	35	50	60
SLZ-KF		✓	✓	✓	✓
SLZ-M	✓	✓	✓	✓	✓


Beautiful design

The straight-line form introduced has resulted in a beautiful square design. Its high affinity ensures the ability to blend in seamlessly with any interior. The indoor unit is an ideal match for office or store use. Of course, design matched 2x2 (600mm*600mm) ceiling construction specifications.

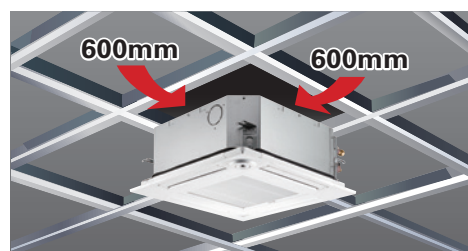

The height above ceiling of 245mm


The height above ceiling of 245mm enables fitting into narrow ceiling space. Installation is simple, even when the ceiling spaces are narrow to make the ceilings higher. Of course, in addition to our products, replacing competitors' product is simplified too.

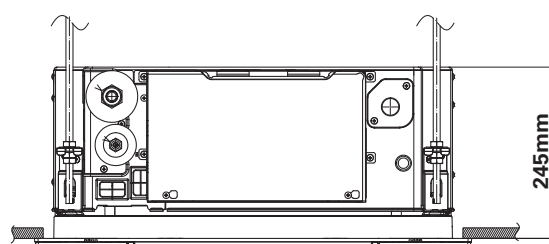

Energy-saving Performance*

The energy-saving performance achieved A++ in SEER and A+ in SCOP.

*In case of connecting with SUZ-KA-VA6

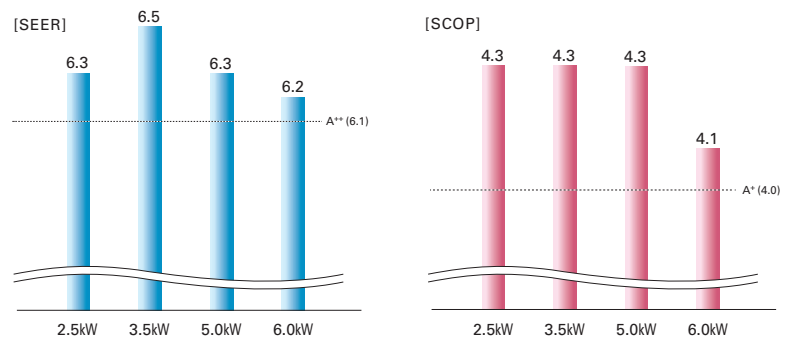

Quietness

Low sound level has been realized by introduction of 3D turbo fan. New SLZ can give users quieter and more comfortable room condition.




Horizontal Airflow

The new airflow control completely eliminates that uncomfortable drafty-feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

[Airflow distribution]*

SLZ-M60FA

Flow angle, cooling at 20°C (ceiling height 2.7m)

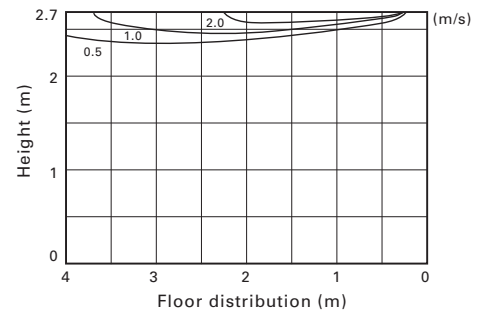


*Vane angle: Horizontal

Easy installation

Temporary hanging hook


The structure of the panel has been revised and is now equipped with a temporary hanging hook. This has improved work efficiency during temporary panel installation.




No need to remove screws

Installation is possible without removing the screws for control box simply loosen them. This eliminates the risk of losing screws.

■ Corner panel




■ Control box cover



Drain lift

As the result of using a larger drain pan, the maximum drain lifting height has been up to 850mm, greatly enhancing construction flexibility compared to the existing model.

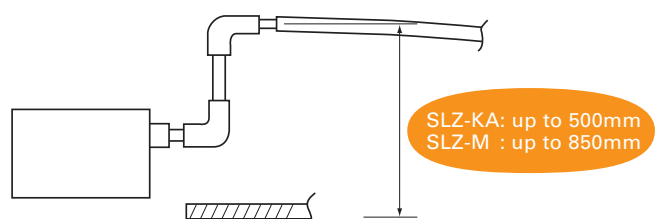

Detects number of people

Room occupancy energy-saving mode

The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air-conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 1°C during both cooling and heating operation is saved. The temperature is controlled according to the number of people.


No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is in the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60min, air-conditioning power equivalent to 2°C during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.

No occupancy Auto-OFF mode*

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10min, ranging from 60 to 180 min.

* When MA Remote Controller is used to control multiple refrigerant systems, "No occupancy Auto-OFF mode" cannot be used.

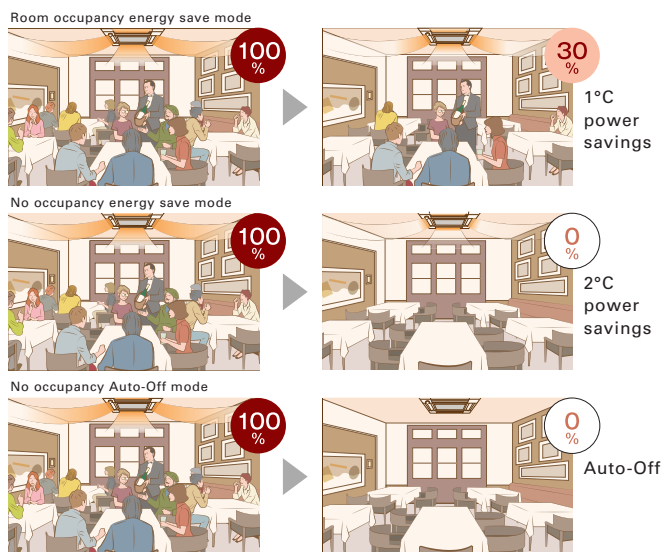


*PAR-41MAA is required for each setting

Detects people's position

Direct/Indirect settings*

Some people do not like the feel of wind, some want to be warm from head to toe. People's likes and dislikes vary. With the 3D i-see Sensor, it is possible to choose to block or not block to the wind for each vane.

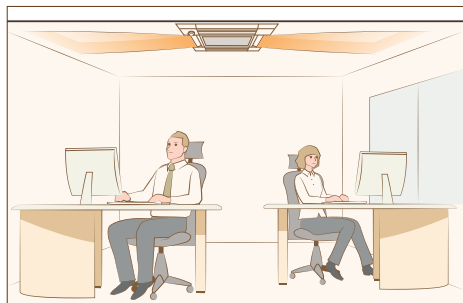

*PAR-41MAA or PAR-SL101A-E is required for each setting.


Seasonal airflow*

<When cooling>

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This clever function contributes to keeping a comfortable coolness.

<When heating>

The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is reused via circulation. When a pre-set temperature is reached the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.

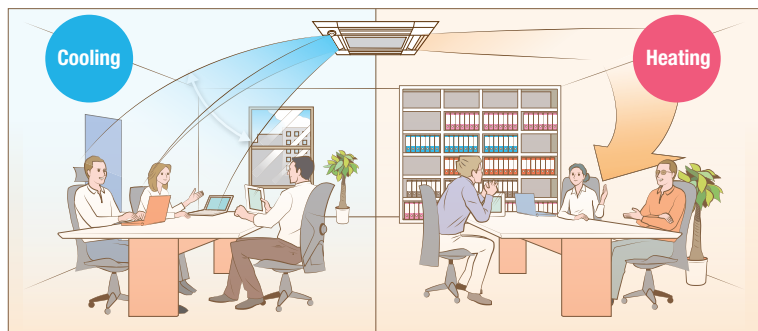

*PAR-41MAA is required for each setting.

Connectable to Plasma Quad Connect

The optional Plasma Quad Connect SLP-2FAP, SLP-2FALP, SLP-2FALMP2 can be installed on the indoor units. *1*2*3

*1 Plasma Quad Connect cannot be used with PAC-SK54/46KF-E (V blocking filter).

*2 If Plasma Quad Connect is used with MAC-334/397/5871F-E (Interface), Plasma Quad Connect use the indoor units CN105. Other interface use the another CN105 on Plasma Quad Connect's PCB.

*3 If Plasma Quad Connect is used with PAC-SK35VK-E (Valve kit) or PAC-SK39AP-E (Valve kit attachment), Plasma Quad Connect use the indoor units barring holes for valve kit. Valve kit needs to be installed on suspension bolts or on horizontal surface using dedicated attachment optional parts.



SLZ-M SERIES



Indoor Unit

R32
R410A



SLZ-M15/25/35/50/60FA2

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Plasma Quad Connect
SLP-2FA				
SLP-2FAL	✓			
SLP-2FAE		✓		
SLP-2FALE	✓	✓		
SLP-2FALM2	✓		✓	
SLP-2FALME2	✓	✓	✓	
SLP-2FAP				✓
SLP-2FALP	✓			✓
SLP-2FALMP2	✓		✓	✓

Outdoor Unit

R32 For Single

R32 For Multi (Twin/Triple/Quadruple)



Remote Controller



Indoor Unit Combination		Outdoor Unit Capacity														
		For Single						For Twin			For Triple			For Quadruple		
		35	50	60	71	100	125	140	71	100	125	100	125	140	125	140
Power Inverter (PUZ-ZM)		35x1	50x1	60x1	-	-	-	-	35x2	50x2	60x2	35x3	50x3	50x3	35x4	35x4
	Distribution Pipe	-	-	-	-	-	-	-	MSDD-50TR2-E			MSDF-111R3-E			MSDF-111R2-E	

Type				Inverter Heat Pump			
Indoor Unit				SLZ-M35FA2	SLZ-M50FA2	SLZ-M60FA2	
Outdoor Unit				PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	
Refrigerant ⁽¹⁾				R32			
Power Supply				Outdoor power supply			
Cooling	Source			230/Single/50			
	Outdoor(V/Phase/Hz)						
	Capacity	Rated	kW	3.6	5.0	6.1	
		Min-Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	
	Total Input	Rated	kW	0.800	1.315	1.648	
	EER			4.50	3.80	3.70	
	Design load		kW	3.6	5.0	6.1	
	Annual electricity consumption ⁽²⁾		kWh/a	194	280	346	
Heating	SEER ⁽⁴⁾			6.5	6.2	6.1	
		Energy efficiency class		A++	A++	A++	
	Capacity	Rated	kW	4.1	5.0	6.4	
		Min-Max	kW	1.6 - 5.0	2.5 - 5.5	2.8 - 7.3	
	Total Input	Rated	kW	1.205	1.470	2.064	
	COP			3.40	3.40	3.10	
	Design load		kW	2.4	3.8	4.4	
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	
	Back up heating capacity		kW	0.0	0.0	0.0	
	Annual electricity consumption ⁽²⁾		kWh/a	820	1273	1560	
	SCOP ⁽⁴⁾			4.0	4.1	3.9	
		Energy efficiency class		A+	A+	A	
Operating Current(Max)		A	13.2	13.3	19.4		
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.02 / 0.02	0.03 / 0.03	0.04 / 0.04	
	Operating Current(Max)		A	0.24	0.32	0.43	
	Dimensions	H*W*D	mm	245-570-570 <10-625-625>	245-570-570 <10-625-625>	245-570-570 <10-625-625>	
	Weight		kg	15 <3>	15 <3>	15 <3>	
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	6.5-8.0-9.5	7.0-9.0-11.5	7.5-11.5-13.0	
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	25-30-34	27-34-39	32-40-43	
	Sound Level (PWL)		dB(A)	51	56	60	
	Outdoor Unit	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)
Weight			kg	46	46	67	
Air Volume		Cooling	m³/min	45	45	55	
		Heating	m³/min	45	45	55	
Sound Level (SPL)		Cooling	dB(A)	44	44	47	
		Heating	dB(A)	46	46	49	
Sound Level (PWL)		Cooling	dB(A)	65	65	67	
		Operating Current(Max)		A	13	13	19
Breaker Size			A	16	16	25	
Ext.Piping		Diameter ⁽³⁾	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88
	Max.Length	Out-In	m	50	50	55	
	Max.Height	Out-In	m	30	30	30	
Guaranteed Operating Range (Outdoor)	Cooling ⁽³⁾	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46		
	Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

SLZ-M SERIES



Indoor Unit

R32
R410A



SLZ-M15/25/35/50/60FA2

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Plasma Quad Connect
SLP-2FA				
SLP-2FAL	✓			
SLP-2FAE		✓		
SLP-2FALE	✓	✓		
SLP-2FALM2	✓		✓	
SLP-2FALME2	✓	✓	✓	
SLP-2FAP				✓
SLP-2FALP	✓			✓
SLP-2FALMP2	✓		✓	✓

Outdoor Unit

For Single

R32



SUZ-M25/35VA

R32



SUZ-M50VA

R32



SUZ-M60VA

Remote Controller



Enclosed in SLP-2FALM/SLP-2FALME



*optional



*optional



*optional



Indoor Unit Combination		Outdoor Unit Capacity				
		For Single				
		25	35	50	60	71
S Seires		25x1	35x1	50x1	60x1	-
Distribution Pipe		-	-	-	-	-

Type				Inverter Heat Pump									
Indoor Unit				SLZ-M25FA2		SLZ-M35FA2		SLZ-M50FA2		SLZ-M60FA2			
Outdoor Unit				SUZ-M25VA		SUZ-M35VA		SUZ-M50VA		SUZ-M60VA			
Refrigerant ⁽¹⁾				R32									
Power Supply				Outdoor power supply									
Cooling				230/Single/50									
	Capacity	Rated	kW	2.5		3.5		4.6		5.7			
		Min-Max	kW	1.4 - 3.2		0.7 - 3.9		1.0 - 5.2		1.5 - 6.3			
	Total Input	Rated	kW	0.657		1.093		1.352		1.676			
	EER			3.80		3.20		3.40		3.40			
	Design load		kW	2.5		3.5		4.6		5.7			
	Annual electricity consumption ⁽²⁾		kWh/a	139		183		253		321			
	SEER ⁽⁴⁾			6.3		6.7		6.3		6.2			
	Energy efficiency class			A++		A++		A++		A++			
	Heating	Capacity	Rated	kW	3.2		4.0		5.0		6.4		
			Min-Max	kW	1.3 - 4.2		1.0 - 5.0		1.3 - 5.5		1.6 - 7.3		
Total Input		Rated	kW	0.886		1.078		1.562		2.133			
COP				3.61		3.71		3.20		3.00			
Design load			kW	2.2		2.6		3.6		4.6			
Declared Capacity		at reference design temperature	kW	2.0 (-10°C)		2.3 (-10°C)		3.2 (-10°C)		4.1 (-10°C)			
		at bivalent temperature	kW	2.0 (-7°C)		2.3 (-7°C)		3.2 (-7°C)		4.1 (-7°C)			
		at operation limit temperature	kW	2.0 (-10°C)		2.3 (-10°C)		3.2 (-10°C)		4.1 (-10°C)			
Back up heating capacity			kW	0.2		0.3		0.4		0.5			
Annual electricity consumption ⁽²⁾			kWh/a	716		845		1192		1560			
SCOP ⁽⁴⁾				4.3		4.3		4.2		4.1			
Energy efficiency class				A+		A+		A+		A+			
Operating Current(Max)				A		7.0		8.7		13.8			
Indoor Unit	Input [cooling / Heating]		Rated	kW	0.02 / 0.02		0.02 / 0.02		0.03 / 0.03		0.04 / 0.04		
	Operating Current(Max)			A	0.20		0.24		0.32		0.43		
	Dimensions		H*W*D	mm	245-570-570 <10-625-625>		245-570-570 <10-625-625>		245-570-570 <10-625-625>		245-570-570 <10-625-625>		
	Weight			kg	15 <3>		15 <3>		15 <3>		15 <3>		
	Air Volume (Lo-Mi2-Mi1-Hi)			m³/min	6.5-7.5-8.5		6.5-8.0-9.5		7.0-9.0-11.5		7.5-11.5-13.0		
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)			dB(A)	25-28-31		25-30-34		27-34-39		32-40-43		
	Sound Level (PWL)			dB(A)	48		51		56		60		
	Dimensions		H*W*D	mm	550-800-285		550-800-285		714-800-285		880-840-330		
	Weight			kg	30		35		41		54		
	Air Volume		Cooling	m³/min	36.3		34.3		45.8		50.1		
Outdoor Unit			Heating	m³/min	34.6		32.7		43.7		50.1		
	Sound Level (SPL)	Cooling	dB(A)	45		48		48		49			
		Heating	dB(A)	46		48		49		51			
	Sound Level (PWL)	Cooling	dB(A)	59		59		64		65			
		Heating	dB(A)	59		59		64		65			
	Operating Current(Max)			A	6.8		8.5		13.5		14.8		
	Breaker Size			A	10		10		20		20		
	Ext.Piping	Diameter ⁽⁵⁾		Liquid/Gas	mm	6.35 / 9.52		6.35 / 9.52		6.35 / 12.7		6.35 / 15.88	
		Max.Length		Out-In	m	20		20		30		30	
		Max.Height		Out-In	m	12		12		30		30	
Guaranteed Operating Range (Outdoor)				Cooling ⁽³⁾	°C	-10 ~ +46		-10 ~ +46		-15 ~ +46		-15 ~ +46	
				Heating	°C	-10 ~ +24		-10 ~ +24		-10 ~ +24		-10 ~ +24	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 SEER and SCOP are based on 2009/125/EC: Energy-related Products Directive and Regulation (EU) No 206/2012.

*4 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

SEZ_{SERIES}



SEZ-M25-71DA(L)2

This concealed ceiling-mounted indoor unit series is compact, and fits easily into rooms with lowered ceilings. Highly reliable energy-saving performance makes it a best match choice for concealed unit installations.




High Energy Efficiency




Highly efficient indoor units with DC inverter contribute to a reduction in electricity consumption throughout a year. The SEZ series has achieved energy-saving performance of "A+" or higher when connected to PUZ series and "A" or higher when connected to SUZ-M series.

Power Inverter

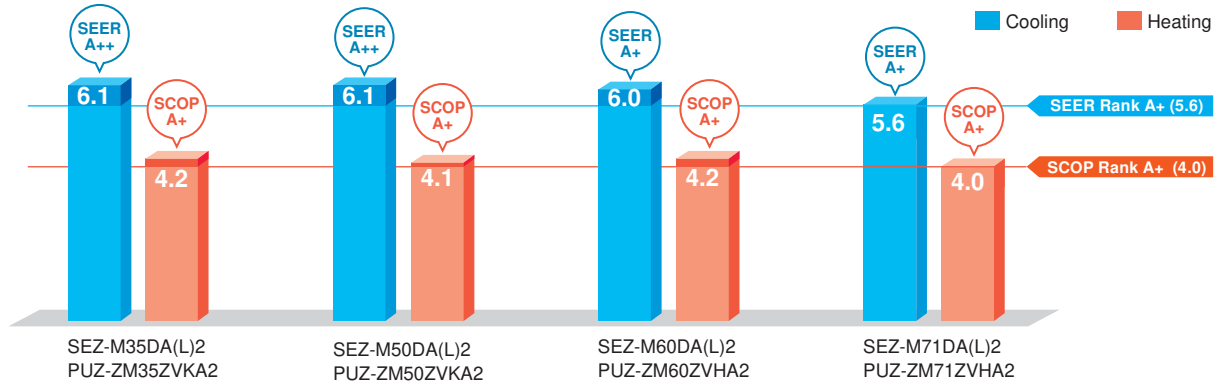


Standard Inverter (R32)

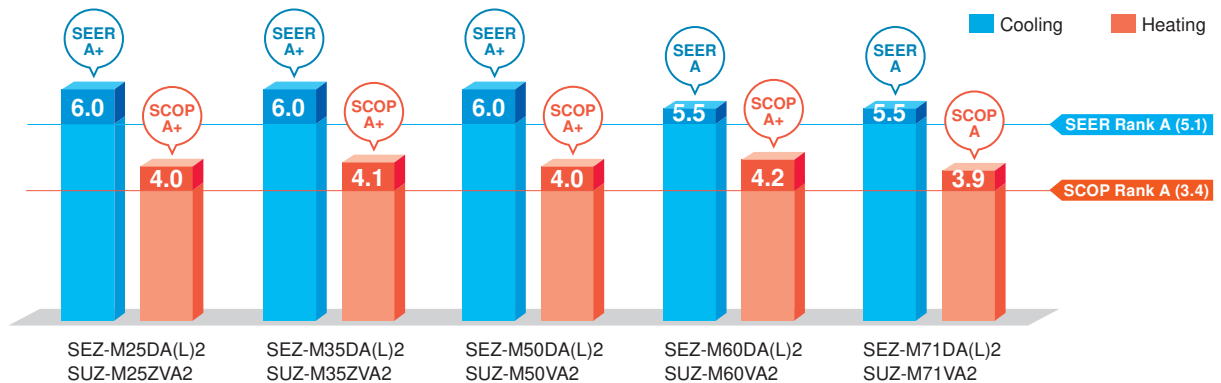


Lineup of compatible outdoor unit has been expanded by power inverter series

Although models in the SEZ series were previously only compatible with the standard inverter, they can now also be connected to small capacity power inverters. The ability to connect to a power inverter with high-performance specifications makes it possible to offer an even wider range of solutions to our customers.

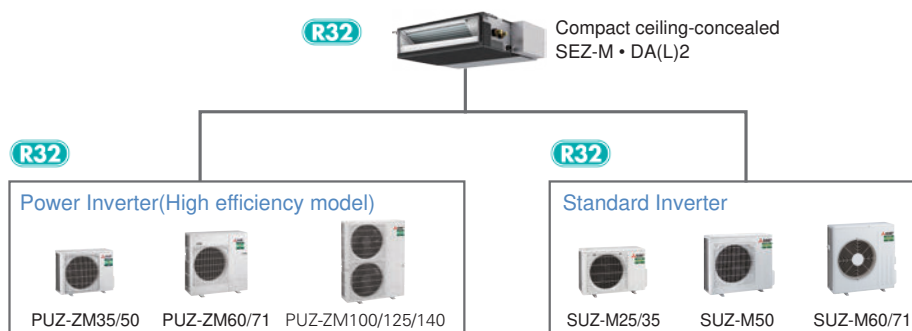

Compact Design with a Height of 200 mm

The height of the units is 200 mm for all capacity ranges. Its thin body is suitable for installation in low ceilings with a small cavity space.

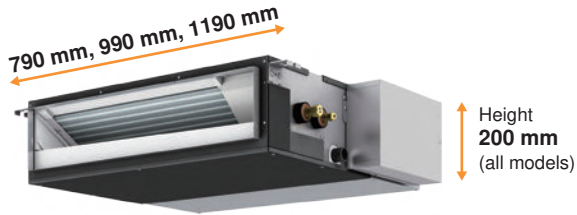

SEZ-M DA(L)2		M25	M35	M50	M60	M71
Height	mm	200				
Width	mm	790	990	1190		

Low Noise Operation

Low noise operation contributes to a peaceful indoor environment. The SPL of M25/35 model, which is the quietest model among the new series, is as low as 22 dB (ESP 5 Pa, low fan speed setting).

Capacity		M25	M35	M50	M60	M71
Sound pressure level	High	29	30	36	37	39
	Mid	25	26	33	33	34
	Low	22	22	29	29	29

*When fan speed setting is low, the cooling/heating capacity is subject to reduce.

*Operation noise may increase due to the installation environment or the operation status.

Selectable Static Pressure Levels


External static pressure can be selected from 5, 25, 35, and 50 Pa (set to 25 Pa at the time of factory shipment).

Four levels Available for All Models

Drain Pump (Optional)


The PAC-KE07DM-E drain pump is available as an option. The drain connection can be raised as high as 580 mm, allowing more freedom in piping layout design.

*The use of drain pump may increase the operation noise.

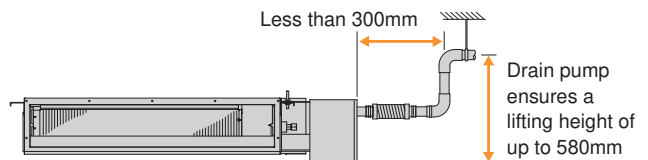

Connectable to Plasma Quad Connect

The optional Plasma Quad Connect MAC-100FT-E can be installed on the indoor unit's air inlet side. For installation, PQ attachment PAC-HA11PAR is required.

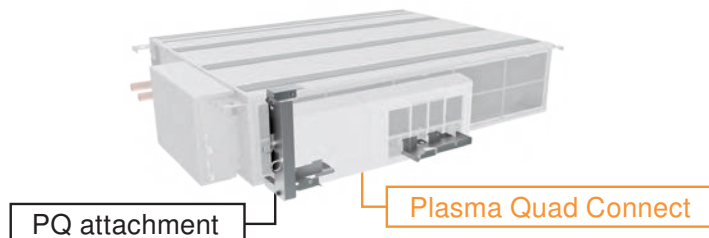


SEZ-M SERIES



Indoor Unit

R32
R410A

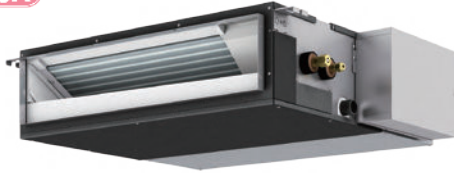

SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit

R32 For Single

R32 For Multi
(Twin/Triple/Quadruple)



Remote Controller



Indoor Unit Combination	Outdoor Unit Capacity													
	For Single							For Twin			For Triple			For Quadruple
	35	50	60	71	100	125	140	71	100	125	100	125	140	125 140
Power Inverter (PUZ-ZM)	35x1	50x1	60x1	71x1	-	-	-	35x2	50x2	60x2	35x3	50x3	50x3	35x4 35x4
Distribution Pipe	-	-	-	-	-	-	-	MSDD-50TR2-E			MSDT-111R3-E			MSDF-1111R2-E

Type				Inverter Heat Pump				
Indoor Unit				SEZ-M35DA(L)J2	SEZ-M50DA(L)J2	SEZ-M60DA(L)J2	SEZ-M71DA(L)J2	
Outdoor Unit				PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2	
Refrigerant ⁽¹⁾				R32				
Power Supply				Outdoor power supply 230/Single/50				
Cooling	Source							
	Outdoor(V/Phase/Hz)							
	Capacity	Rated	kW	3.6	5.0	6.1	7.1	
		Min-Max	kW	1.6 - 3.9	2.3 - 5.6	2.7 - 6.3	3.3 - 8.1	
	Total Input	Rated	kW	0.857	1.315	1.525	1.918	
	EER ^(*)			4.20	3.80	4.00	3.70	
	Design load		kW	3.6	5.0	6.1	7.1	
	Annual electricity consumption ^{(*)2}		kWh/a	205	287	352	440	
	SEER ^{(*)4)(5)}			6.1	6.1	6.0	5.6	
		Energy efficiency class		A++	A++	A+	A+	
Heating	Capacity	Rated	kW	4.1	6.0	7.0	8.0	
		Min-Max	kW	1.6 - 5.0	2.5 - 7.2	2.8 - 8.0	3.5 - 10.2	
	Total Input	Rated	kW	1.025	1.578	1.707	2.051	
	COP ^(*)4)			4.00	3.80	4.10	3.90	
	Design load		kW	2.4	3.8	4.4	4.7	
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	
	Back up heating capacity		kW	0.0	0.0	0.0	0.0	
	Annual electricity consumption ^{(*)2}		kWh/a	791	1279	1464	1633	
	SCOP ^{(*)4)(5)}			4.2	4.1	4.2	4.0	
		Energy efficiency class		A+	A+	A+	A+	
	Operating Current(Max)		A	13.7	13.8	19.9	20.0	
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.047	0.077	0.084	0.102	
	Operating Current(Max)		A	0.65	0.82	0.88	1.00	
	Dimensions	H*W*D	mm	200 - 990 - 700	200 - 990 - 700	200 - 1190 - 700	200 - 1190 - 700	
	Weight		kg	22	22	25.5	25.5	
	Air Volume (Lo-Mid-Hi)		m³/min	7 - 9 - 11	10 - 12.5 - 15	12 - 15 - 18	12 - 16 - 20	
	External Static Pressure ^(*)2)		Pa	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	
	Sound Level (Lo-Mid-Hi) (SPL)	Rated	dB(A)	23 - 27 - 31	30 - 34 - 37	30 - 34 - 38	30 - 35 - 40	
		5Pa ^(*)10)	dB(A)	22 - 26 - 30	29 - 33 - 36	29 - 33 - 37	29 - 34 - 39	
	Sound Level (PWL)		dB(A)	51	57	58	60	
	Dimensions	H*W*D	mm	630-809-300	630-809-300	943-950-330(+25)	943-950-330(+25)	
Outdoor Unit	Weight		kg	46	46	67	67	
	Air Volume	Cooling	m³/min	45	45	55	55	
		Heating	m³/min	45	45	55	55	
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	
		Heating	dB(A)	46	46	49	49	
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	
		Operating Current(Max)		A	13	13	19	19
	Breaker Size		A	16	16	25	25	
	Ext.Piping	Diameter ^(*)6)	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88
		Max.Length	Out-In	m	50	50	55	55
Max.Height		Out-In	m	30	30	30	30	
Guaranteed Operating Range (Outdoor)	Cooling ^(*)3)	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46		
	Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 25Pa

*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*6 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*7 The factory setting of ESP is shown without < >.


*8 SPL measured at ESP 5Pa.

SEZ-M SERIES



Indoor Unit

R32
R410A

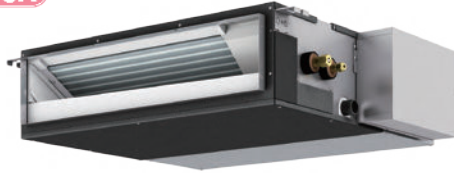

SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit

For Single

R32



SUZ-M25/35VA

R32



SUZ-M50VA

R32



SUZ-M60/71VA

Remote Controller



Enclosed in
SEZ-M DAL2



*optional
(for SEZ-M DA2)



*optional
(for SEZ-M DA2)



*optional
(for SEZ-M DA2)



Indoor Unit Combination		Outdoor Unit Capacity				
		For Single				
		25	35	50	60	71
S Seires		25x1	35x1	50x1	60x1	71x1
Distribution Pipe		-	-	-	-	-

Type			Inverter Heat Pump										
Indoor Unit			SEZ-M25DA(L)2		SEZ-M35DA(L)2		SEZ-M50DA(L)2		SEZ-M60DA(L)2		SEZ-M71DA(L)2		
Outdoor Unit			SUZ-M25VA		SUZ-M35VA		SUZ-M50VA		SUZ-M60VA		SUZ-M71VA		
Refrigerant ^(*)			R32										
Power Supply Cooling	Source Outdoor(V/Phase/Hz)		Outdoor power supply 230/Single/50										
	Capacity	Rated	kW	2.5		3.5		5.0		6.1		7.1	
		Min-Max	kW	1.4 ~ 3.2		0.7 ~ 3.9		1.1 ~ 5.6		1.6 ~ 6.3		2.2 ~ 8.1	
	Total Input	Rated	kW	0.714		1.000		1.547		1.848		2.151	
	EER ^(*) (4)			3.50		3.50		3.23		3.30		3.30	
	Design load		kW	2.5		3.5		5.0		6.1		7.1	
	Annual electricity consumption ^(*) (2)		kWh/a	146		202		290		385		451	
	SEER ^(*) (4)(5)			6.0		6.0		6.0		5.5		5.5	
Energy efficiency class			A+		A+		A+		A		A		
Heating	Capacity	Rated	kW	2.9		4.2		6.0		7.4		8.0	
		Min-Max	kW	1.3 ~ 4.2		1.1 ~ 5.0		1.5 ~ 7.2		1.6 ~ 8.0		2.0 ~ 10.2	
	Total Input	Rated	kW	0.803		1.076		1.617		2.049		2.285	
	COP ^(*) (4)			3.61		3.90		3.71		3.61		3.50	
	Design load		kW	2.2		2.6		4.3		4.6		5.8	
	Declared Capacity	at reference design temperature	kW	2.0 (-10°C)		2.3 (-10°C)		3.8 (-10°C)		4.1 (-10°C)		5.2 (-10°C)	
		at bivalent temperature	kW	2.0 (-7°C)		2.3 (-7°C)		3.8 (-7°C)		4.1 (-7°C)		5.2 (-7°C)	
		at operation limit temperature	kW	2.0 (-10°C)		2.3 (-10°C)		3.8 (-10°C)		4.1 (-10°C)		5.2 (-10°C)	
	Back up heating capacity		kW	0.2		0.3		0.5		0.5		0.6	
	Annual electricity consumption ^(*) (2)		kWh/a	769		878		1501		1516		2030	
SCOP ^(*) (4)(5)			4.0		4.1		4.0		4.2		3.9		
Energy efficiency class			A+		A+		A+		A+		A		
Operating Current(Max)			A		7.4		9.2		14.3		15.7		
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.043		0.047		0.077		0.084		0.102	
	Operating Current(Max)		A	0.62		0.65		0.82		0.88		1.00	
	Dimensions	H*W*D	mm	200 - 790 - 700		200 - 990 - 700		200 - 990 - 700		200 - 1190 - 700		200 - 1190 - 700	
	Weight		kg	18		22		22		25.5		25.5	
	Air Volume (Lo-Mid-Hi)		m³/min	5.5 ~ 7 ~ 9		7 ~ 9 ~ 11		10 ~ 12.5 ~ 15		12 ~ 15 ~ 18		12 ~ 16 ~ 20	
	External Static Pressure ^(*) (6)		Pa	<5> ~ 25 ~ <35> ~ <50>		<5> ~ 25 ~ <35> ~ <50>		<5> ~ 25 ~ <35> ~ <50>		<5> ~ 25 ~ <35> ~ <50>		<5> ~ 25 ~ <35> ~ <50>	
	Sound Level (Lo-Mid-Hi) (SPL)	Rated	dB(A)	23 ~ 26 ~ 30		23 ~ 27 ~ 31		30 ~ 34 ~ 37		30 ~ 34 ~ 38		30 ~ 35 ~ 40	
		5Pa ^(*) (7)	dB(A)	22 ~ 25 ~ 29		22 ~ 26 ~ 30		29 ~ 33 ~ 36		29 ~ 33 ~ 37		29 ~ 34 ~ 39	
	Sound Level (PWL)		dB(A)	50		51		57		58		60	
	Outdoor Unit	Dimensions	H*W*D	mm	550-800-285		550-800-285		714-800-285		880-840-330		880-840-330
Weight			kg	30		35		41		54		55	
Air Volume		Cooling	m³/min	36.3		34.3		45.8		50.1		50.1	
		Heating	m³/min	34.6		32.7		43.7		50.1		50.1	
Sound Level (SPL)		Cooling	dB(A)	45		48		48		49		49	
		Heating	dB(A)	46		48		49		51		51	
Sound Level (PWL)		Cooling	dB(A)	59		59		64		65		66	
Operating Current(Max)			A	6.8		8.5		13.5		14.8		14.8	
Breaker Size			A	10		10		20		20		20	
Ext.Piping Diameter ^(*) (8)			Liquid/Gas	mm	6.35 / 9.52		6.35 / 9.52		6.35 / 12.7		6.35 / 15.88		
Guaranteed Operating Range (Outdoor)	Max.Length	Out-In	m	20		20		30		30		30	
	Max.Height	Out-In	m	12		12		30		30		30	
	Cooling ^(*) (3)	°C		-10 ~ +46		-10 ~ +46		-15 ~ +46		-15 ~ +46		-15 ~ +46	
Heating		°C	-10 ~ +24		-10 ~ +24		-10 ~ +24		-10 ~ +24		-10 ~ +24		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 SEER/SCOP are measured at ESP 25Pa.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*6 The factory setting of ESP is shown without < >.

*7 SPL measured at ESP 5Pa.

SFZ SERIES

The concealed floor standing type indoor unit is newly introduced to the S-series and can be neatly installed in the perimeter zone. High energy efficiency is achieved across all capacity range. External static pressure, airflow rate, and air intake direction can be selected according to the customer's choice.


R32



SFZ-M25/35/50/60/71VA


A wide lineup offering high energy efficiency

The SFZ series achieves an A++ rating on the SEER index, and an A+ rating on the SCOP index for all capacity range. No matter which capacity you select, the series offers a high level of energy efficiency.

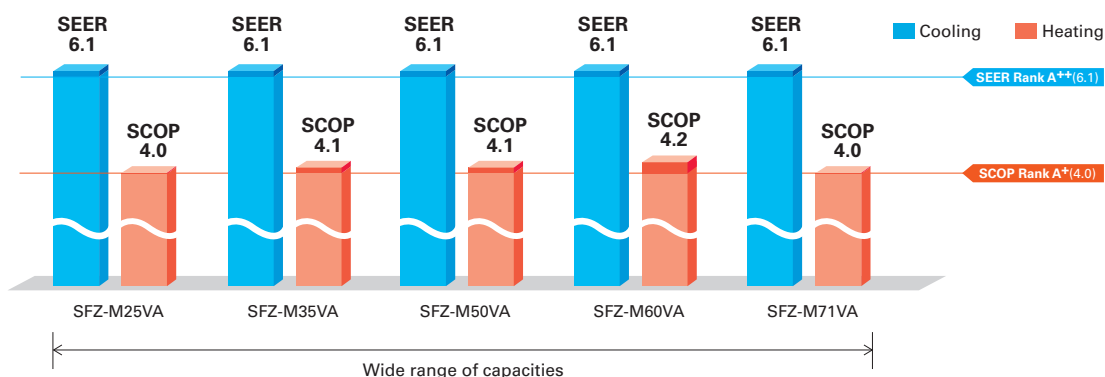

Compact body and small footprint


With the control box built inside the unit, the compact body and small footprint are realized. This allows the unit to be installed within a small perimeter zone.

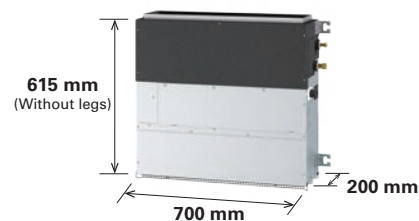


Flexible installation

Air inlet direction from the bottom or front can be selected by changing panel, fan guard and filter.


Bottom suction *1

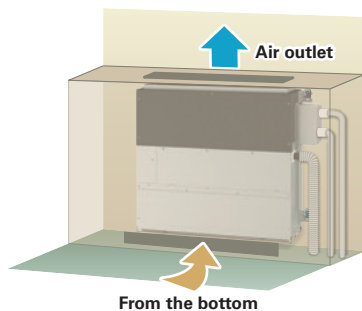

Front suction *2

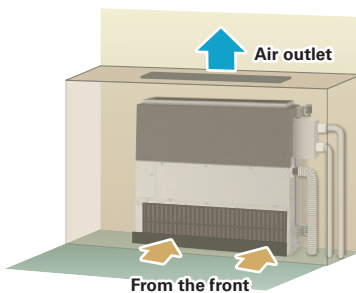

Installation with legs

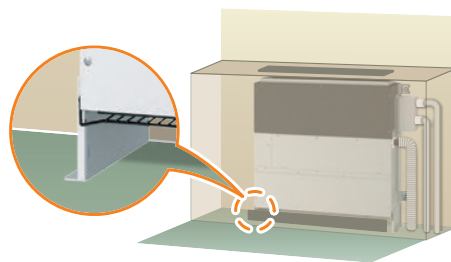

*Height of unit (with legs) is 690 mm.
*Legs are supplied as accessory with the unit.

*1 Select a site where the flow of supply air is not blocked. The unit cannot be placed directly on the floor in the case of bottom suction.

*2 Unit with front suction generate more noise compared to bottom suction. Not recommended to be installed in rooms such as bedrooms where quietness is valued.

Fan speed

Airflow rate can be selected from 3 patterns; Low-Medium-High.

External static pressure

Four levels of static pressure are available. The ability to select additional static pressure provides flexibility for air outlet configuration.

SFZ-M25/35/50/60/71VA <0>/25/<40>/<60> Pa

The factory setting of external static pressure is shown without brackets (< >).

Refer to "Fan characteristics curves" according to the external static pressure, in the DATA BOOK for the usable range of airflow rate.

SFZ-M SERIES

Indoor Unit

R32



SFZ-M25/35/50/60/71VA

Outdoor Unit

R32



SUZ-M25/35VA

R32



SUZ-M50VA

R32



SUZ-M60/71VA

Remote Controller



PAR-40MAA
*Optional



PAR-CT01MAA
*Optional



PAC-YT52CRA
*Optional

Type				Inverter Heat Pump					
Indoor Unit				SFZ-M25VA	SFZ-M35VA	SFZ-M50VA	SFZ-M60VA	SFZ-M71VA	
Outdoor Unit				SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	
Refrigerant* ¹				R32* ¹					
Power Supply	Source			Outdoor power supply					
	Outdoor (V/Phase/Hz)			230 / Single / 50					
Cooling	Capacity	Rated	kW	2.5	3.5	5.0	6.1	7.1	
		Min - Max	kW	1.5 - 3.2	0.7 - 3.9	1.1 - 5.6	1.6 - 6.3	1.9 - 8.1	
	Total Input	Rated	kW	0.641	1.000	1.470	1.848	2.151	
	EER			3.90	3.50	3.40	3.30	3.30	
	Design Load		kW	2.5	3.5	5.0	6.1	7.1	
	Annual Electricity Consumption* ²		kWh/a	143	199	284	346	403	
	SEER* ⁴ * ⁵			6.1	6.1	6.1	6.1	6.1	
	Energy Efficiency Class			A++	A++	A++	A++	A++	
Heating (Average Season)	Capacity	Rated	kW	3.2	4.1	6.0	7.0	8.0	
		Min - Max	kW	1.2 - 4.2	1.0 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	
	Total Input	Rated	kW	0.886	1.051	1.617	1.886	2.156	
	COP			3.61	3.90	3.71	3.71	3.71	
	Design Load		kW	2.2	2.6	4.3	4.6	5.8	
	Declared Capacity	at reference design temperature	kW	2.0 (−10°C)	2.3 (−10°C)	3.3 (−10°C)	4.1 (−10°C)	5.2 (−10°C)	
		at bivalent temperature	kW	2.0 (−7°C)	2.3 (−7°C)	3.8 (−7°C)	4.1 (−7°C)	5.2 (−7°C)	
		at operation limit temperature	kW	2.0 (−10°C)	2.3 (−10°C)	3.3 (−10°C)	4.1 (−10°C)	5.2 (−10°C)	
	Back Up Heating Capacity		kW	0.2	0.3	1.0	0.5	0.6	
	Annual Electricity Consumption* ²		kWh/a	766	887	1467	1532	1997	
	SCOP* ⁴ * ⁵			4.0	4.1	4.1	4.2	4.0	
		Energy Efficiency Class			A+	A+	A+	A+	A+
Operating Current (max)			A	7.2	8.9	14.1	15.4	15.6	
Indoor Unit	Input	Rated	kW	0.041	0.044	0.072	0.078	0.095	
		Operating Current (max)	A	0.44	0.44	0.61	0.64	0.76	
	Dimensions <Panel>* ⁶ * ⁷	H x W x D	mm	615 (690) - 797 (700) - 200	615 (690) - 997 (900) - 200	615 (690) - 997 (900) - 200	615 (690) - 1197 (1100) - 200	615 (690) - 1197 (1100) - 200	
	Weight <Panel>		kg	18.5	22.5	22.5	25.5	25.5	
	Air Volume [Lo-Mid-Hi]		m³/min	5.5 - 7 - 9	7 - 9 - 11	10 - 12.5 - 15	12 - 15 - 18	12 - 16 - 20	
	External Static Pressure* ⁸		Pa	<0> / 25 / <40> / <60>	<0> / 25 / <40> / <60>	<0> / 25 / <40> / <60>	<0> / 25 / <40> / <60>	<0> / 25 / <40> / <60>	
	Sound Level (SPL)* ⁹ [Lo-Mid-Hi]		dB(A)	25 - 29 - 35	25 - 29 - 33	30 - 35 - 39	30 - 35 - 39	30 - 36 - 42	
	Sound Level (PWL)		dB(A)	54	53	59	59	61	
	Outdoor Unit	Dimensions	H x W x D	mm	550 - 800 - 285	550 - 800 - 285	714 - 800 - 285	880 - 840 - 330	880 - 840 - 330
			Weight	kg	30	35	41	54	55
Air Volume		Cooling	m³/min	36.3	34.3	45.8	50.1	50.1	
		Heating	m³/min	34.6	32.7	43.7	50.1	50.1	
Sound Level (SPL)		Cooling	dB(A)	45	48	48	49	49	
		Heating	dB(A)	46	48	49	51	51	
Sound Level (PWL)		Cooling	dB(A)	59	59	64	65	66	
Operating Current (max)		A	6.8	8.5	13.5	14.8	14.8		
Breaker Size		A	10	10	20	20	20		
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	
	Max. Length	Out-In	m	20	20	30	30	30	
	Max. Height	Out-In	m	12	12	30	30	30	
Guaranteed Operating Range [Outdoor]		Cooling* ³	°C	−10 ~ +46	−10 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	
		Heating	°C	−10 ~ +24	−10 ~ +24	−10 ~ +24	−10 ~ +24	−10 ~ +24	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 SEER/SCOP are measured at ESP 25Pa.

*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

*6 The height that includes the duct flange is 638 (713) mm. The values in () show the height of unit with leg.

*7 The width includes the pipe cover (sheet metal). The values in () show the width that does not include the pipe cover.

*8 The factory setting of ESP is shown without < >.

*9 SPL measured at ESP 25Pa.

CONTROL TECHNOLOGIES

User-friendly Deluxe Remote Controller with Excellent Operability and Visibility



PAR-41 MAA


2+1 Back-up rotation*

The use of a three-refrigerant air conditioning system enables you to utilize the back-up, rotation, and cut-in functions. This allows you to implement effective risk management for added peace of mind.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.


Back-up Function

In the unlikely event that one of the units stops operation due to an abnormality, the standby unit immediately starts back-up operation. Being fully prepared for a failure guarantees that an operation is always available and gives you the confidence that your system will be reliable in any situation.

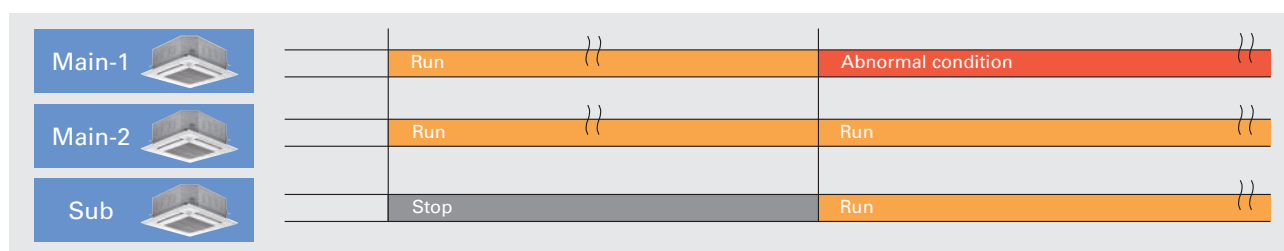

Rotation Function

A single remote controller is used to operate three-refrigerant air conditioning system in a rotation pattern. Reducing the burden on the equipment allows you to maintain a longer time between maintenance and increases product life.

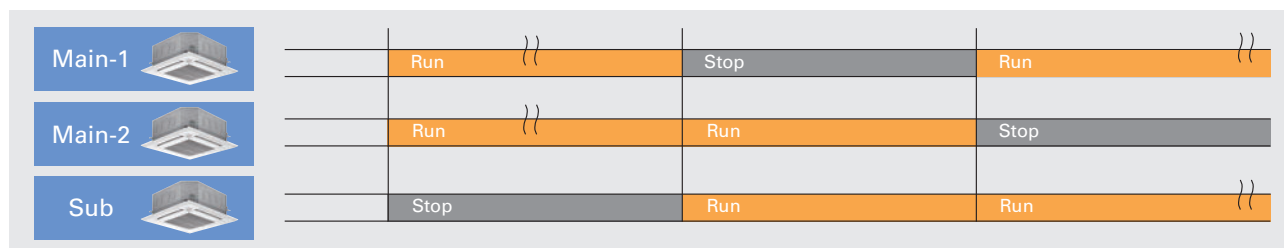

Cut-in Function

If the actual room temperature greatly differs from the set temperature and two-refrigerant air conditioning system is insufficient, the standby unit starts operation to provide support.

