


For R2-Series


The secret of CITY MULTI heat recovery systems lies in the

BC Controller

The BC controller houses a liquid/gas separator, allowing the outdoor unit to deliver a mixture (2-phase) of hot gas for heating and liquid for cooling, all through the same pipe. The three pipe system allocates a pipe to each of these phases. When this mixture arrives at the BC controller, it is separated, and the correct phase is delivered to each indoor unit according to the individual requirement for either heating or cooling.

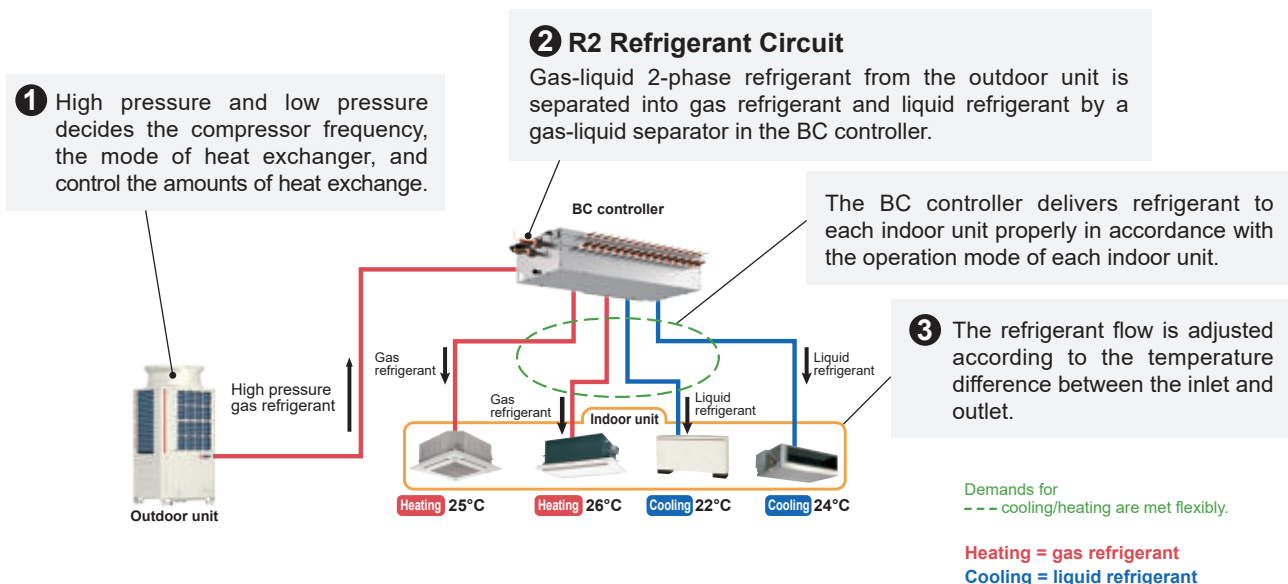

• Total heat recovery operation

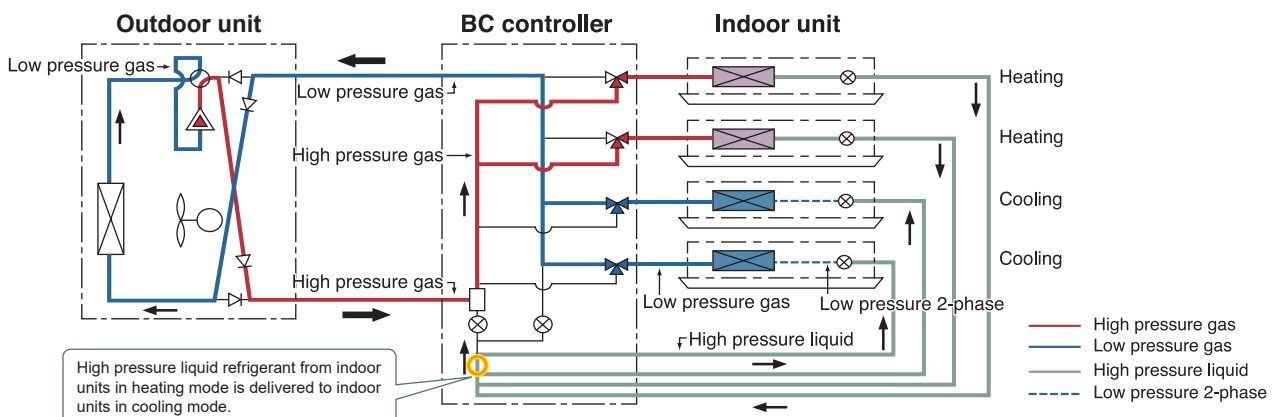

The latest BC controller models are compatible with both the R32 and the R410A outdoor unit series.

Lineup

Conventional model

Type	Model name
J	CMB-P**V-J
JA	CMB-P**V-JA
KA	CMB-P**V-KA
KB	CMB-P**V-KB


Latest model

Type	Model name	Usage
J1	CMB-M**V-J1	Main BC controller
JA1	CMB-M**V-JA1	Main BC controller with sub BC controller
KA1	CMB-P**V-KA1 *	Main BC controller with sub BC controller
KB1	CMB-M**V-KB1	Sub BC controller

*KA1 type can only be connected to R410A outdoor units.


*When mixing the use of a conventional (J/JA/KA/KB type) and latest (J1/JA1/KA1/KB1 type) BC controller, please refer to the DATABOOK for details.

• System with a main BC controller

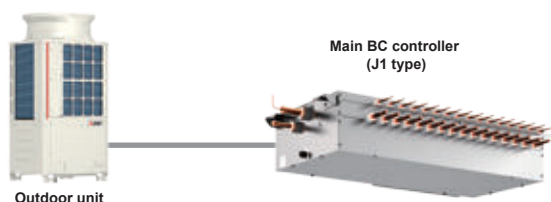


Main BC controller (J1 type)

Model	CMB-M104V-J1	CMB-M106V-J1	CMB-M108V-J1	CMB-M1012V-J1	CMB-M1016V-J1
Number of branches	4	6	8	12	16
Connectable outdoor unit capacity	R32 (E)M200 to (E)M300/ R410A (E)P200 to (E)P350				

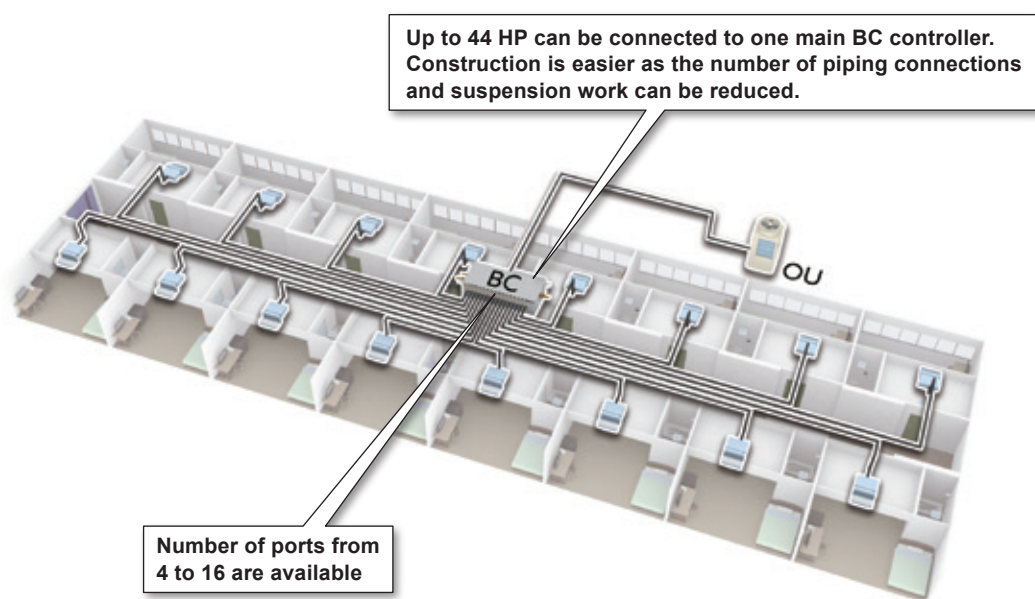

• System with multiple BC controllers

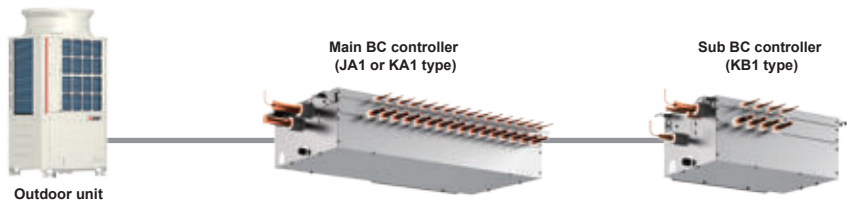


Main BC controller used with sub BC controller (JA1 and KA1 types)

Model	CMB-M108V-JA1	CMB-M1012V-JA1	CMB-M1016V-JA1	CMB-P1016V-KA1
Number of branches	8	12	16	16
Connectable outdoor unit capacity	R32 (E)M200 to (E)M300/ R410A (E)P200 to (E)P900			R410A (E)P200 to (E)P1100

*KA1 type can only be connected to R410A outdoor units.

Sub BC controller (KB1 type)

Model	CMB-M104V-KB1	CMB-M108V-KB1
Number of branches	4	8
Connectable main BC controller	CMB-M108/1012/1016V-JA1, CMB-P1016V-KA1	

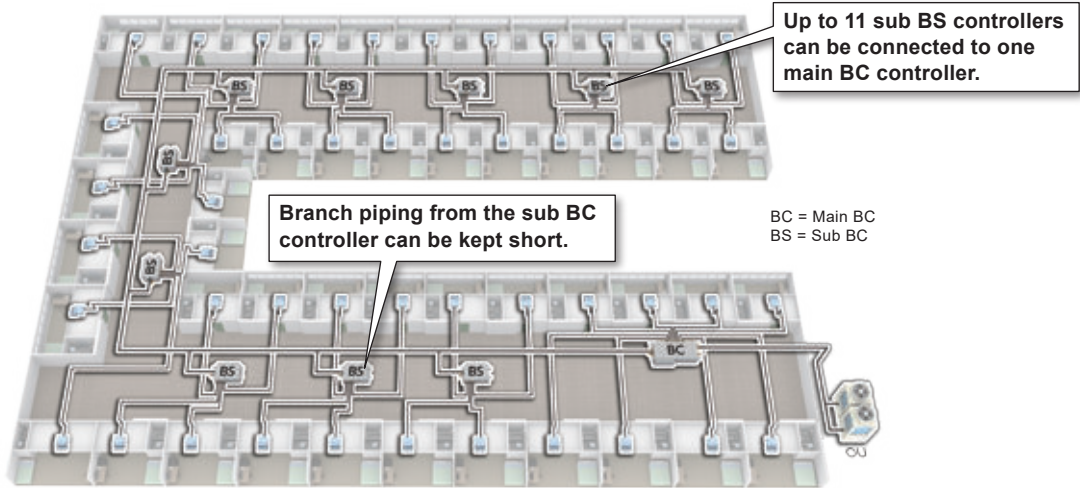


*When installing a sub BC controller, refer to the DATA BOOK for full details.
*The main BC controller has two ports for sub BC controllers. A low pressure pipe needs to be branched from the outdoor unit.

Features


• Drain pan design

Conventional model *CMB-P V-J/V-JA/V-KA/V-KB



The drain pan is externally attached to the BC controller.

Latest model *CMB-M V-J1/V-JA1/V-KB1, CMB-P V-KA1




The drain pan on the latest BC controller is inbuilt and can be detached from the bottom for easier maintenance.


Easier maintenance with inbuilt detachable drain pan.

• Piping

Conventional model *CMB-P V-JA/V-KA/V-KB

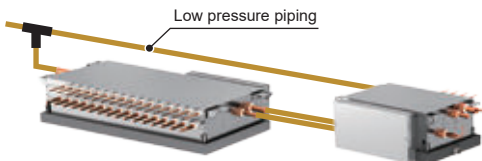


Latest model *CMB-M V-JA1/V-KB1, CMB-P V-KA1

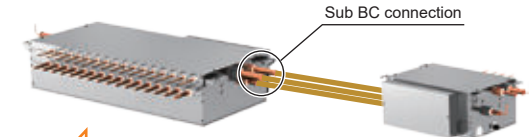

Easier installation with a low pressure piping connected to a sub BC.

Optional parts

- For BC controllers

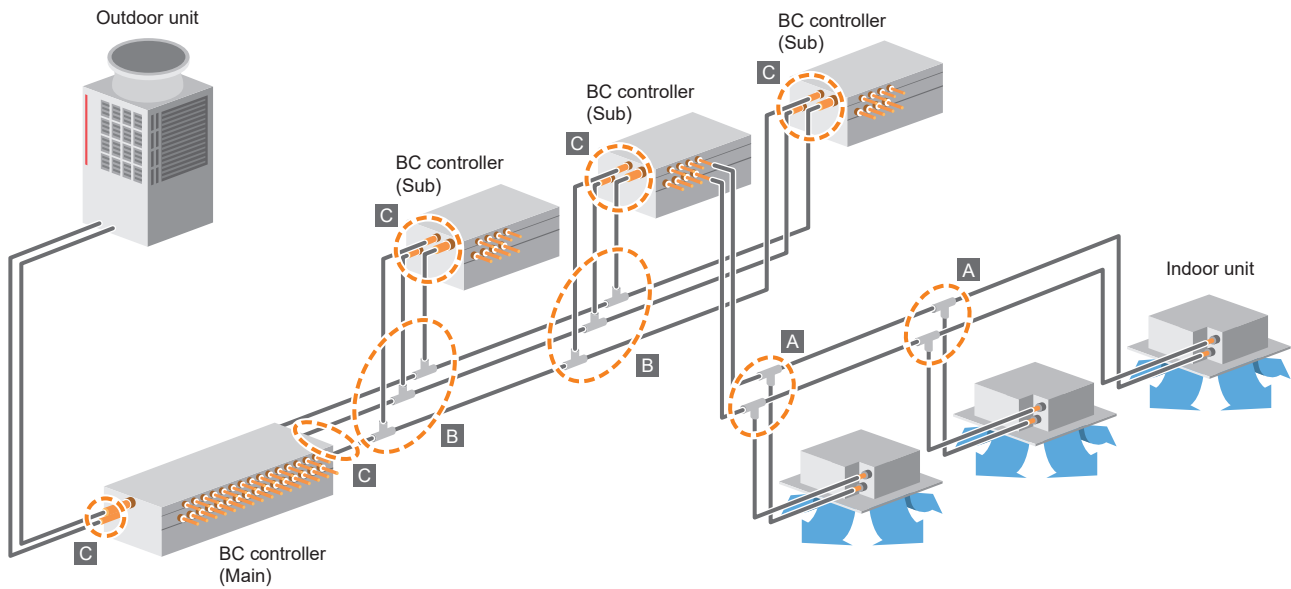

A	Branch joint	Between BC and indoor units	CMY-Y102SS-G2	Total down-stream indoor unit capacity: -P/M200
			CMY-Y102LS-G2	Total down-stream indoor unit capacity: P/M201-P/M250
B	Branch joint	Between Main BC and Sub BC	CMY-R201S-G	Total down-stream indoor unit capacity: -P/M350
			CMY-R202S-G	Total down-stream indoor unit capacity: P/M351-P/M600
			CMY-R203S-G	Total down-stream indoor unit capacity: P/M601-P/M650
			CMY-R204S-G	Total down-stream indoor unit capacity: P/M651-P/M1000
			CMY-R205S-G	Total down-stream indoor unit capacity: P/M1001-
C	Reducer	Between outdoor units and BC	CMY-R301S-G	For J1 type (Outdoor unit capacity: P200-P350/M200-M300)
			CMY-R302S-G1	For JA1 type (Outdoor unit capacity: P200-P900/M200-M300)
			CMY-R304S-G1	For KA1 type (Outdoor unit capacity: P200-P1100)
		Between Main BC and Sub BC	CMY-R303S-G1	For JA1 type (When using the Sub BC controller)
			CMY-R305S-G1	For KA1 type (When using the Sub BC controller)
			CMY-R306S-G	For KB1 type
Branch pipe (Header)			CMY-R160-J1	Joint for connecting to two nozzles


*Items "B" is not necessary when J1-type BC controller is used.

CMB-M V-J1

CMB-M V-JA1

CMB-P V-KA1

CMB-M V-KB1

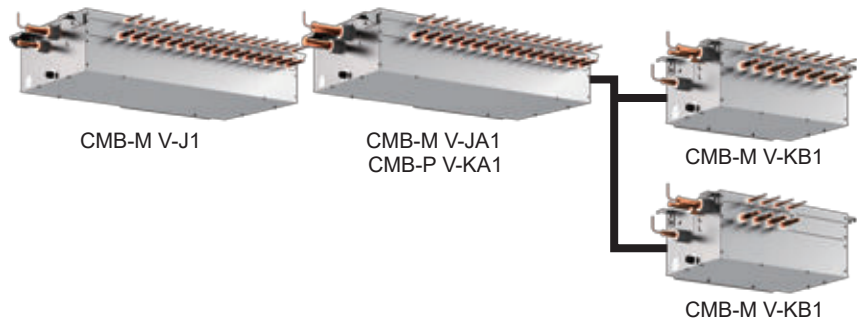

J1 type R32 R410A

CMB-M V-J1

Model			CMB-M104V-J1(-TR)		CMB-M106V-J1(-TR)		CMB-M108V-J1(-TR)		CMB-M1012V-J1(-TR)		CMB-M1016V-J1(-TR)	
Number of branch			4		6		8		12		16	
Power source			1-phase 220-230-240 V									
			50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz
Power input (220/230/240)	Cooling	kW	0.067/0.076/0.085	0.054/0.061/0.067	0.097/0.110/0.123	0.078/0.088/0.097	0.127/0.144/0.161	0.102/0.115/0.127	0.186/0.211/0.236	0.150/0.168/0.186	0.246/0.279/0.312	0.198/0.222/0.246
	Heating	kW	0.030/0.034/0.038	0.024/0.027/0.030	0.045/0.051/0.057	0.036/0.041/0.045	0.060/0.068/0.076	0.048/0.054/0.060	0.090/0.102/0.114	0.072/0.081/0.090	0.119/0.135/0.151	0.096/0.108/0.119
Current input (220/230/240)	Cooling	A	0.31/0.34/0.36	0.25/0.27/0.28	0.45/0.48/0.52	0.36/0.39/0.41	0.58/0.63/0.68	0.47/0.50/0.53	0.85/0.92/0.99	0.69/0.74/0.78	1.12/1.22/1.30	0.90/0.97/1.03
	Heating	A	0.14/0.15/0.16	0.11/0.12/0.13	0.21/0.23/0.24	0.17/0.18/0.19	0.28/0.30/0.32	0.22/0.24/0.25	0.42/0.44/0.48	0.33/0.36/0.38	0.55/0.59/0.63	0.44/0.47/0.50
External finish			Galvanized steel plate (Lower part drain pan: Pre-coated galvanized sheets + powder coating)									
Connectable outdoor unit capacity			P200 to P350/M200 to M300									
Indoor unit capacity connectable to 1 branch *14			Model P/M80 or smaller (Use optional joint pipe combining 2 branches when the total unit capacity exceeds P/M81.)									
External dimension HxWxD		mm	250 x 596 x 476		250 x 596 x 476		250 x 596 x 476		252 x 911 x 622		252 x 1,135 x 622	
		in.	9-7/8 x 23-1/2 x 18-3/4		9-7/8 x 23-1/2 x 18-3/4		9-7/8 x 23-1/2 x 18-3/4		9-15/16 x 35-7/8 x 24-1/2		9-15/16 x 44-11/16 x 24-1/2	
Refrigerant piping diameter	To outdoor unit		High press. pipe	Low press. pipe	High press. pipe	Low press. pipe	High press. pipe	Low press. pipe	High press. pipe	Low press. pipe	High press. pipe	Low press. pipe
	Connectable unit capacity											
	P200/M200	mm(in.) O.D.	15.88 (5/8) Braze	19.05 (3/4) Braze	15.88 (5/8) Braze	19.05 (3/4) Braze	15.88 (5/8) Braze	19.05 (3/4) Braze	15.88 (5/8) Braze	19.05 (3/4) Braze	15.88 (5/8) Braze	19.05 (3/4) Braze
	P250/P300	mm(in.) O.D.	19.05 (3/4) Braze	22.2 (7/8) Braze	19.05 (3/4) Braze	22.2 (7/8) Braze	19.05 (3/4) Braze	22.2 (7/8) Braze	19.05 (3/4) Braze	22.2 (7/8) Braze	19.05 (3/4) Braze	22.2 (7/8) Braze
	P350 *15	mm(in.) O.D.	19.05 (3/4) Braze or 22.2 (7/8) Braze	28.58 (1-1/8) Braze	19.05 (3/4) Braze or 22.2 (7/8) Braze	28.58 (1-1/8) Braze	19.05 (3/4) Braze or 22.2 (7/8) Braze	28.58 (1-1/8) Braze	19.05 (3/4) Braze or 22.2 (7/8) Braze	28.58 (1-1/8) Braze	19.05 (3/4) Braze or 22.2 (7/8) Braze	28.58 (1-1/8) Braze
	M250/M300	mm(in.) O.D.	15.88 (5/8) Braze	22.2 (7/8) Braze	15.88 (5/8) Braze	22.2 (7/8) Braze	15.88 (5/8) Braze	22.2 (7/8) Braze	15.88 (5/8) Braze	22.2 (7/8) Braze	15.88 (5/8) Braze	22.2 (7/8) Braze
	To indoor unit		Liquid pipe	Gas pipe	Liquid pipe	Gas pipe	Liquid pipe	Gas pipe	Liquid pipe	Gas pipe	Liquid pipe	Gas pipe
		mm(in.) O.D.	Indoor unit Model 50 or smaller 6.35 (1/4) Braze bigger than 50 9.52 (3/8) Braze	Indoor unit Model 50 or smaller 12.7 (1/2) Braze bigger than 50 15.88 (5/8) Braze (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)	Indoor unit Model 50 or smaller 6.35 (1/4) Braze bigger than 50 9.52 (3/8) Braze	Indoor unit Model 50 or smaller 12.7 (1/2) Braze bigger than 50 15.88 (5/8) Braze (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)	Indoor unit Model 50 or smaller 6.35 (1/4) Braze bigger than 50 9.52 (3/8) Braze	Indoor unit Model 50 or smaller 12.7 (1/2) Braze bigger than 50 15.88 (5/8) Braze (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)	Indoor unit Model 50 or smaller 6.35 (1/2) Braze bigger than 50 9.52 (3/8) Braze	Indoor unit Model 50 or smaller 12.7 (1/2) Braze bigger than 50 15.88 (5/8) Braze (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)	Indoor unit Model 50 or smaller 6.35 (1/4) Braze bigger than 50 9.52 (3/8) Braze	Indoor unit Model 50 or smaller 12.7 (1/2) Braze bigger than 50 15.88 (5/8) Braze (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)
Field drain pipe size			mm (in.)		O.D. 32 (1-1/4)		O.D. 32 (1-1/4)		O.D. 32 (1-1/4)		O.D. 32 (1-1/4)	
Net weight			kg (lbs)		26 (58)		29 (64)		33 (73)		49 (109)	
Sound power level (measured in anechoic room)	Rated operation	dB <A>	59		59		59		59		59	
	Defrost	dB <A>	71		71		71		71		71	
Sound pressure level (measured in anechoic room) *16	Rated operation	dB <A>	40		40		40		40		40	
	Defrost	dB <A>	53		53		53		53		53	
Accessories			Drain Connection pipe, Washer, Tie band									

Notes:

1. Installation/foundation work, electrical connection work, insulation work, power source switch, and other items shall be referred to the Installation Manual.
2. The equipment is for R410A or R32 refrigerant.
3. Install this product in a location where noise (refrigerant noise) emitted by the unit will not disturb the neighbors.
(For use in quiet environments with low background noise, position the BC CONTROLLER at least 5m away from any indoor units.)
4. Sound pressure/power level differs depending on the connected outdoor unit capacity or operation condition.
The sound pressure/power level at the rated operation is the value of the cooling mode.
5. The sound pressure/power level values were obtained in an anechoic room. Actual sound pressure level is usually greater than that measured in anechoic room due to ambient noise and deflection sound.
6. The sound pressure level values were obtained at the location below 1.5m from the unit.
7. The solenoid valve switching sound is 56 dB (sound pressure level) regardless of the unit model.
8. Indoor units P/M100, P/M125, P/M140 can be connected to 1 branch. (In this case, cooling capacity decrease a little.)
9. Refrigerant piping diameter for connection of plural indoor units with 1 branch shall be referred to the Installation Manual.
10. This unit is not designed for outside installations.
11. When blazing the pipes, be sure to blaze, after covering a wet cloth to the insulation pipes of the units in order to prevent it from burning and shrinking by heat.
12. The ambient relative humidity of the BC controller needs to be kept below 80%.
13. R32 is flammable, and certain restrictions apply to the installation of units.
When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.
For detail, refer to the section in the DATA BOOK on installation restrictions.
14. Indoor unit capacity connectable to 1 branch is changed depending on the indoor unit type and connection method. Please refer to the Installation Manual for more information.
15. For the refrigerant pipe size, refer to Installation Manual of outdoor units.
16. The sound pressure level measured by the conventional method in JIS for reference purpose.

JA1 type R32 R410A

CMB-M V-JA1

Model			CMB-M108V-JA1(-TR)		CMB-M1012V-JA1(-TR)		CMB-M1016V-JA1(-TR)							
Number of branch			8		12		16							
Power source			1-phase 220-230-240 V											
			50 Hz		60 Hz		50 Hz		60 Hz					
Power input	Cooling	kW	0.127/0.144/0.161	0.102/0.115/0.127	0.186/0.211/0.236	0.150/0.168/0.186	0.246/0.279/0.312	0.198/0.222/0.246						
(220/230/240)	Heating	kW	0.060/0.068/0.076	0.048/0.054/0.060	0.090/0.102/0.114	0.072/0.081/0.090	0.119/0.135/0.151	0.096/0.108/0.119						
Current input	Cooling	A	0.58/0.63/0.68	0.47/0.50/0.53	0.85/0.92/0.99	0.69/0.74/0.78	1.12/1.22/1.30	0.90/0.97/1.03						
(220/230/240)	Heating	A	0.28/0.30/0.32	0.22/0.24/0.25	0.42/0.44/0.48	0.33/0.36/0.38	0.55/0.59/0.63	0.44/0.47/0.50						
External finish			Galvanized steel plate (Lower part drain pan: Pre-coated galvanized sheets + powder coating)											
Connectable outdoor unit capacity			P200 to P900/M200 to M300											
Indoor unit capacity connectable to 1 branch *14			Model P/M80 or smaller (Use optional joint pipe combining 2 branches when the total unit capacity exceeds P/M81.)											
External dimension HxWxD		mm	252 x 911 x 622			252 x 1,135 x 622		252 x 1,135 x 622						
		in.	9-15/16 x 35-7/8 x 24-1/2			9-15/16 x 44-11/16 x 24-1/2		9-15/16 x 44-11/16 x 24-1/2						
Refrigerant piping diameter	To outdoor unit		High press. pipe		Low press. pipe		High press. pipe		Low press. pipe					
	Connectable unit capacity													
	P200/M200	mm(in.) O.D.	15.88 (5/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	19.05 (3/4) Brazed				
	P250/P300	mm(in.) O.D.	19.05 (3/4) Brazed	22.2 (7/8) Brazed	19.05 (3/4) Brazed	22.2 (7/8) Brazed	19.05 (3/4) Brazed	22.2 (7/8) Brazed	19.05 (3/4) Brazed	22.2 (7/8) Brazed				
	P350	*15 mm(in.) O.D.	19.05 (3/4) Brazed or 22.2 (7/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed or 22.2 (7/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed or 22.2 (7/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed or 22.2 (7/8) Brazed	28.58 (1-1/8) Brazed				
	P400 to P500	mm(in.) O.D.	22.2 (7/8) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	28.58 (1-1/8) Brazed				
	P550	*15 mm(in.) O.D.	22.2 (7/8) Brazed or 28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed or 28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed or 28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed or 28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed				
	P600	*15 mm(in.) O.D.	22.2 (7/8) Brazed or 28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed or 34.93 (1-3/8) Brazed	22.2 (7/8) Brazed or 28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed or 34.93 (1-3/8) Brazed	22.2 (7/8) Brazed or 28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed or 34.93 (1-3/8) Brazed	22.2 (7/8) Brazed or 28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed or 34.93 (1-3/8) Brazed				
	P650	mm(in.) O.D.	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed				
	P700 to P800	mm(in.) O.D.	28.58 (1-1/8) Brazed	34.93 (1-3/8) Brazed	28.58 (1-1/8) Brazed	34.93 (1-3/8) Brazed	28.58 (1-1/8) Brazed	34.93 (1-3/8) Brazed	28.58 (1-1/8) Brazed	34.93 (1-3/8) Brazed				
	P850 to P900	mm(in.) O.D.	28.58 (1-1/8) Brazed	41.28(1-5/8) Brazed	28.58 (1-1/8) Brazed	41.28(1-5/8) Brazed	28.58 (1-1/8) Brazed	41.28(1-5/8) Brazed	28.58 (1-1/8) Brazed	41.28(1-5/8) Brazed				
	M250/M300	mm(in.) O.D.	15.88 (5/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	22.2 (7/8) Brazed				
	To indoor unit		Liquid pipe		Gas pipe		Liquid pipe		Gas pipe					
			Indoor unit Model 50 or smaller 6.35 (1/4) Brazed bigger than 50 9.52 (3/8) Brazed		Indoor unit Model 50 or smaller 12.7 (1/2) Brazed bigger than 50 15.88 (5/8) Brazed (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)		Indoor unit Model 50 or smaller 12.7 (1/2) Brazed bigger than 50 15.88 (5/8) Brazed (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)		Indoor unit Model 50 or smaller 12.7 (1/2) Brazed bigger than 50 15.88 (5/8) Brazed (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)					
			mm(in.) O.D.											
	To other BC controller		High press. pipe		Liquid pipe		Low press. pipe		High press. pipe		Liquid pipe		Low press. pipe	
	Total down-stream Indoor unit capacity													
	to P200/M200		mm(in.) O.D.	15.88 (5/8) Brazed	9.52 (3/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	9.52 (3/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	9.52 (3/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	9.52 (3/8) Brazed
	P201 to P300		mm(in.) O.D.	19.05 (3/4) Brazed	9.52 (3/8) Brazed	22.2 (7/8) Brazed	19.05 (3/4) Brazed	9.52 (3/8) Brazed	22.2 (7/8) Brazed	19.05 (3/4) Brazed	9.52 (3/8) Brazed	22.2 (7/8) Brazed	19.05 (3/4) Brazed	9.52 (3/8) Brazed
	P301 to P350		mm(in.) O.D.	19.05 (3/4) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	12.7 (1/2) Brazed
P351 to P400		mm(in.) O.D.	22.2 (7/8) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	12.7 (1/2) Brazed	
P401 to P600		mm(in.) O.D.	22.2 (7/8) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	
P601 to P650		mm(in.) O.D.	28.58 (1-1/8) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	15.88 (5/8) Brazed	
P651 to P800		mm(in.) O.D.	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	34.93 (1-3/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	34.93 (1-3/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	34.93 (1-3/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	
P801 to P1000		mm(in.) O.D.	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	41.28(1-5/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	41.28(1-5/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	41.28(1-5/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	
P1001 or above		mm(in.) O.D.	34.93 (1-3/8) Brazed	19.05 (3/4) Brazed	41.28(1-5/8) Brazed	34.93 (1-3/8) Brazed	19.05 (3/4) Brazed	41.28(1-5/8) Brazed	34.93 (1-3/8) Brazed	19.05 (3/4) Brazed	41.28(1-5/8) Brazed	34.93 (1-3/8) Brazed	19.05 (3/4) Brazed	
M201 to M300		mm(in.) O.D.	15.88 (5/8) Brazed	9.52 (3/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	9.52 (3/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	9.52 (3/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	9.52 (3/8) Brazed	
M301 to M350		mm(in.) O.D.	15.88 (5/8) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	15.88 (5/8) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	15.88 (5/8) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	15.88 (5/8) Brazed	12.7 (1/2) Brazed	
M351 to M400		mm(in.) O.D.	19.05 (3/4) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	12.7 (1/2) Brazed	
M401 to M450		mm(in.) O.D.	19.05 (3/4) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	
Field drain pipe size		mm (in.)	O.D. 32 (1-1/4)			O.D. 32 (1-1/4)			O.D. 32 (1-1/4)					
Net weight		kg (lbs)	48 (106)			60 (133)			68 (150)					
Sound power level (measured in anechoic room)	Rated operation	dB <A>	68			68			68					
Defrost	dB <A>	74	74			74			74					
Sound pressure level (measured in anechoic room) *16	Rated operation	dB <A>	50			50			50					
Defrost	dB <A>	56	56			56			56					
Accessories			Drain Connection pipe, Washer, Tie band											

Notes:

1. Installation/foundation work, electrical connection work, insulation work, power source switch, and other items shall be referred to the Installation Manual.
2. The equipment is for R410A or R32 refrigerant.
3. Install this product in a location where noise (refrigerant noise) emitted by the unit will not disturb the neighbors.
(For use in quiet environments with low background noise, position the BC CONTROLLER at least 5m away from any indoor units.)
4. Sound pressure/power level differs depending on the connected outdoor unit capacity or operation condition.
The sound pressure/power level at the rated operation is the value of the cooling mode.
5. The sound pressure/power level values were obtained in an anechoic room. Actual sound pressure level is usually greater than that measured in anechoic room due to ambient noise and deflection sound.
6. The sound pressure level values were obtained at the location below 1.5m from the unit.
7. The solenoid valve switching sound is 56 dB (sound pressure level) regardless of the unit model.
8. Indoor units P/M100, P/M125, P/M140 can be connected to 1 branch. (In this case, cooling capacity decrease a little.)
9. Refrigerant piping diameter for connection of plural indoor units with 1 branch shall be referred to the Installation Manual.
10. This unit is not designed for outside installations.
11. When blazing the pipes, be sure to blaze, after covering a wet cloth to the insulation pipes of the units in order to prevent it from burning and shrinking by heat.
12. The ambient relative humidity of the BC controller needs to be kept below 80%.
13. R32 is flammable, and certain restrictions apply to the installation of units.
When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.
For detail, refer to the section in the DATA BOOK on installation restrictions.
14. Indoor unit capacity connectable to 1 branch is changed depending on the indoor unit type and connection method. Please refer to the Installation Manual for more information.
15. For the refrigerant pipe size, refer to Installation Manual of outdoor units.
16. The sound pressure level measured by the conventional method in JIS for reference purpose.

Lineup & Functions

Y-Series

R2-Series

ZUBADAN
-Series

S-Series

BC Controllers

Ceiling
cassette typeCeiling
concealed typeCeiling
suspended typeWall-mounted
typeFloor standing
type

Functions

LOSSNAY
SystemRemote
ControllerHot Water
Solution

KA1 type R410A

CMB-P V-KA1

Model				CMB-P1016V-KA1(-TR)		
Number of branch				16		
Power source				1-phase 220-230-240 V		
				50Hz		
Power input (220/230/240)	Cooling	kW		0.246/0.279/0.312		0.198/0.222/0.246
	Heating	kW		0.119/0.135/0.151		0.096/0.108/0.119
Current input (220/230/240)	Cooling	A		1.12/1.22/1.30		0.90/0.97/1.03
	Heating	A		0.55/0.59/0.63		0.44/0.47/0.50
External finish				Galvanized steel plate (Lower part drain pan: Pre-coated galvanized sheets + powder coating)		
Connectable outdoor unit capacity				P200 to P1100		
Indoor unit capacity connectable to 1 branch *13				Model P80 or smaller (Use optional joint pipe combining 2 branches when the total unit capacity exceeds P81.)		
External dimension HxWxD			mm	250 x 1,135 x 622		
			in.	9-7/8 x 44-11/16 x 24-1/2		
Refrigerant piping diameter	To outdoor unit			High press. pipe		
	Connectable unit capacity			Low press. pipe		
	P200	mm(in.) O.D.		15.88 (5/8) Brazed		
	P250/P300	mm(in.) O.D.		19.05 (3/4) Brazed		
	P350 *14	mm(in.) O.D.		19.05 (3/4) Brazed or 22.2 (7/8) Brazed		
	P400 to P500	mm(in.) O.D.		22.2 (7/8) Brazed		
	P550 *14	mm(in.) O.D.		22.2 (7/8) Brazed or 28.58 (1-1/8) Brazed		
	P600 *14	mm(in.) O.D.		22.2 (7/8) Brazed or 28.58 (1-1/8) Brazed		
	P650	mm(in.) O.D.		28.58 (1-1/8) Brazed		
	P700 to P800	mm(in.) O.D.		28.58 (1-1/8) Brazed		
	P850 to P1000	mm(in.) O.D.		28.58 (1-1/8) Brazed		
	P1050 to P1100	mm(in.) O.D.		34.93 (1-3/8) Brazed		
	To indoor unit			Liquid pipe		
				Gas pipe		
				Indoor unit Model 50 or smaller 6.35 (1/4) Brazed bigger than 50 9.52 (3/8) Brazed		
				Indoor unit Model 50 or smaller 12.7 (1/2) Brazed bigger than 50 15.88 (5/8) Brazed (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)		
	To other BC controller			High press. pipe		
	Total down-stream Indoor unit capacity			Liquid pipe		
				Low press. pipe		
	to P200	mm(in.) O.D.		15.88 (5/8) Brazed		19.05 (3/4) Brazed
	P201 to P300	mm(in.) O.D.		19.05 (3/4) Brazed		22.2 (7/8) Brazed
	P301 to P350	mm(in.) O.D.		19.05 (3/4) Brazed		28.58 (1-1/8) Brazed
	P351 to P400	mm(in.) O.D.		22.2 (7/8) Brazed		28.58 (1-1/8) Brazed
	P401 to P600	mm(in.) O.D.		22.2 (7/8) Brazed		28.58 (1-1/8) Brazed
	P601 to P650	mm(in.) O.D.		28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed
	P651 to P800	mm(in.) O.D.		28.58 (1-1/8) Brazed		34.93 (1-3/8) Brazed
	P801 to P1000	mm(in.) O.D.		28.58 (1-1/8) Brazed		41.28 (1-5/8) Brazed
	P1001 or above	mm(in.) O.D.		34.93 (1-3/8) Brazed		41.28 (1-5/8) Brazed
Field drain pipe size			mm (in.)	O.D. 32 (1-1/4)		
Net weight			kg (lbs)	69 (153)		
Sound power level (measured in anechoic room)	Rated operation	dB <A>		66		
	Defrost	dB <A>		73		
Sound pressure level (measured in anechoic room) *15	Rated operation	dB <A>		48		
	Defrost	dB <A>		55		
Accessories				Drain Connection pipe, Washer, Tie band		

Notes:

1. Installation/foundation work, electrical connection work, insulation work, power source switch, and other items shall be referred to the Installation Manual.
2. The equipment is for R410A refrigerant.
3. Install this product in a location where noise (refrigerant noise) emitted by the unit will not disturb the neighbors.
(For use in quiet environments with low background noise, position the BC CONTROLLER at least 5m away from any indoor units.)
4. Sound pressure/power level differs depending on the connected outdoor unit capacity or operation condition. The sound pressure/power level at the rated operation is the value of the cooling mode.
5. The sound pressure/power level values were obtained in an anechoic room. Actual sound pressure level is usually greater than that measured in anechoic room due to ambient noise and deflection sound.
6. The sound pressure level values were obtained at the location below 1.5m from the unit.
7. The solenoid valve switching sound is 56 dB (sound pressure level) regardless of the unit model.
8. Indoor units P100, P125, P140 can be connected to 1 branch. (In this case, cooling capacity decrease a little.)
9. Refrigerant piping diameter for connection of plural indoor units with 1 branch shall be referred to the Installation Manual.
10. This unit is not designed for outside installations.
11. When blazing the pipes, be sure to blaze, after covering a wet cloth to the insulation pipes of the units in order to prevent it from burning and shrinking by heat.
12. The ambient relative humidity of the BC controller needs to be kept below 80%.
13. Indoor unit capacity connectable to 1 branch is changed depending on the indoor unit type and connection method. Please refer to the Installation Manual for more information.
14. For the refrigerant pipe size, refer to Installation Manual of outdoor units.
15. The sound pressure level measured by the conventional method in JIS for reference purpose.

KB1 type R32 R410A

CMB-M V-KB1

Model			CMB-M104V-KB1(-TR)			CMB-M108V-KB1(-TR)								
Number of branch			4			8								
Power source			1-phase 220-230-240 V											
			50 Hz		60 Hz		50 Hz		60 Hz					
Power input	Cooling	kW	0.060/0.068/0.076		0.048/0.054/0.060		0.119/0.135/0.151		0.096/0.108/0.119					
(220/230/240)	Heating	kW	0.030/0.034/0.038		0.024/0.027/0.030		0.060/0.068/0.076		0.048/0.054/0.060					
Current input	Cooling	A	0.28/0.30/0.32		0.22/0.24/0.25		0.55/0.59/0.63		0.44/0.47/0.50					
(220/230/240)	Heating	A	0.14/0.15/0.16		0.11/0.12/0.13		0.28/0.30/0.32		0.22/0.24/0.25					
External finish			Galvanized steel plate (Lower part drain pan: Pre-coated galvanized sheets + powder coating)											
Connectable Main BC controller			CMB-M108/1012/1016V-JA1(-TR), CMB-P1016V-KA1(-TR)											
The maximum number of connectable Sub BC controllers			11											
The maximum connectable capacity of indoor units			P/M350 for each											
External dimension HxWxD		mm	250 x 596 x 476				250 x 596 x 476							
		in.	9-7/8 x 23-1/2 x 18-3/4				9-7/8 x 23-1/2 x 18-3/4							
Refrigerant piping diameter	To outdoor unit		High press. pipe		Low press. pipe		High press. pipe		Low press. pipe					
	Connectable unit capacity													
	-		-		-		-							
	mm(in.) O.D.		-		-		-		-					
	To indoor unit		Liquid pipe		Gas pipe		Liquid pipe		Gas pipe					
	mm(in.) O.D.		Indoor unit Model 50 or smaller 6.35 (1/4) Brazed		Indoor unit Model 50 or smaller 12.7 (1/2) Brazed		Indoor unit Model 50 or smaller 6.35 (1/4) Brazed		Indoor unit Model 50 or smaller 12.7 (1/2) Brazed					
			bigger than 50 9.52 (3/8) Brazed		bigger than 50 15.88 (5/8) Brazed (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)		bigger than 50 9.52 (3/8) Brazed		bigger than 50 15.88 (5/8) Brazed (19.05 (3/4), 22.2 (7/8) with optional joint pipe used.)					
	To other BC controller		High press. pipe		Liquid pipe		Low press. pipe		High press. pipe		Liquid pipe		Low press. pipe	
	Total down-stream Indoor unit capacity													
	to P200/M200		mm(in.) O.D.	15.88 (5/8) Brazed	9.52 (3/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	9.52 (3/8) Brazed	19.05 (3/4) Brazed					
	P201 to P300		mm(in.) O.D.	19.05 (3/4) Brazed	9.52 (3/8) Brazed	22.2 (7/8) Brazed	19.05 (3/4) Brazed	9.52 (3/8) Brazed	22.2 (7/8) Brazed					
	P301 to P350		mm(in.) O.D.	19.05 (3/4) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed					
	P351 to P400		mm(in.) O.D.	22.2 (7/8) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed					
	P401 to P600		mm(in.) O.D.	22.2 (7/8) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed					
	P601 to P650		mm(in.) O.D.	28.58 (1-1/8) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed					
	P651 to P800		mm(in.) O.D.	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	34.93 (1-3/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	34.93 (1-3/8) Brazed					
	P801 to P1000		mm(in.) O.D.	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	41.28(1-5/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	41.28(1-5/8) Brazed					
	P1001 or above		mm(in.) O.D.	34.93 (1-3/8) Brazed	19.05 (3/4) Brazed	41.28(1-5/8) Brazed	34.93 (1-3/8) Brazed	19.05 (3/4) Brazed	41.28(1-5/8) Brazed					
	M201 to M300		mm(in.) O.D.	15.88 (5/8) Brazed	9.52 (3/8) Brazed	22.2 (7/8) Brazed	15.88 (5/8) Brazed	9.52 (3/8) Brazed	22.2 (7/8) Brazed					
	M301 to M350		mm(in.) O.D.	15.88 (5/8) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	15.88 (5/8) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed					
M351 to M400		mm(in.) O.D.	19.05 (3/4) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	12.7 (1/2) Brazed	28.58 (1-1/8) Brazed						
M401 to M450		mm(in.) O.D.	19.05 (3/4) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed	19.05 (3/4) Brazed	15.88 (5/8) Brazed	28.58 (1-1/8) Brazed						
Field drain pipe size		mm (in.)	O.D. 32 (1-1/4)											
Net weight		kg (lbs)	23 (51)											
Sound power level			59											
(measured in anechoic room)	Rated operation	dB <A>	59											
	Defrost	dB <A>	71											
Sound pressure level			40											
	Rated operation	dB <A>	40											
(measured in anechoic room) *15	Defrost	dB <A>	53											
			53											
Accessories			Drain Connection pipe, Washer, Tie band											

Notes:

1. Installation/foundation work, electrical connection work, insulation work, power source switch, and other items shall be referred to the Installation Manual.
2. The equipment is for R410A or R32 refrigerant.
3. Install this product in a location where noise (refrigerant noise) emitted by the unit will not disturb the neighbors.
(For use in quiet environments with low background noise, position the BC CONTROLLER at least 5m away from any indoor units.)
4. Sound pressure/power level differs depending on the connected outdoor unit capacity or operation condition.
The sound pressure/power level at the rated operation is the value of the cooling mode.
5. The sound pressure/power level values were obtained in an anechoic room. Actual sound pressure level is usually greater than that measured in anechoic room due to ambient noise and deflection sound.
6. The sound pressure level values were obtained at the location below 1.5m from the unit.
7. The solenoid valve switching sound is 56 dB (sound pressure level) regardless of the unit model.
8. Indoor units P/M100, P/M125, P/M140 can be connected to 1 branch. (In this case, cooling capacity decrease a little.)
9. Refrigerant piping diameter for connection of plural indoor units with 1 branch shall be referred to the Installation Manual.
10. This unit is not designed for outside installations.
11. When blazing the pipes, be sure to blaze, after covering a wet cloth to the insulation pipes of the units in order to prevent it from burning and shrinking by heat.
12. Can't use singleness. (MAIN BC CONTROLLER is necessary)
13. The ambient relative humidity of the BC controller needs to be kept below 80%.
14. R32 is flammable, and certain restrictions apply to the installation of units.
When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.
For detail, refer to the section in the DATA BOOK on installation restrictions.
15. The sound pressure level measured by the conventional method in JIS for reference purpose.