

Ceiling cassette type

1-way airflow type

PMFY-P VBM-E **R410A**


• Technologies and functions..... P.160



Recommended for installation at the edges of a room.
A lightweight body ensures excellent workability.

Ceiling mounted installation

Installing a 1-way airflow type unit in a room creates a more spacious feel that enhances room comfort. This overhead format is also an excellent solution when lighting equipment is installed at the center of the room and fixtures such as book shelves are mounted on wall surfaces.

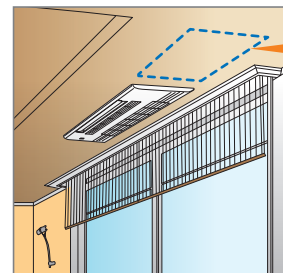


Compact size for smooth installation and maintenance

The body size of the unit has been standardized for all models at 812 mm for easy installation. Body weight is only 14 kg for the main unit and 3 kg for the panel, making this unit one of the lightest in the industry.

Drain pump

The drain can be positioned anywhere up to 600 mm (23-5/8 in.) from the ceiling surface.

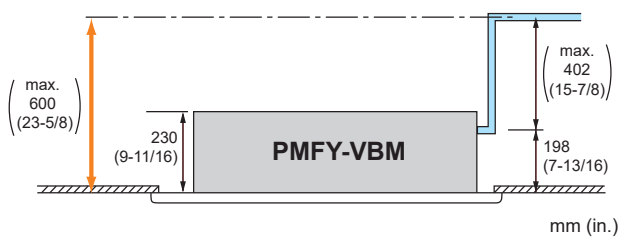

IT terminal

An IT terminal is available. Contact your local distributor for details.

Lineup & Functions

Y-Series

R2-Series

ZUBADAN-Series

S-Series

BC Controllers

Ceiling cassette type

Ceiling concealed type

Ceiling suspended type

Wall-mounted type

Floor standing type

Functions

LOSSNAY System

Remote Controller

Hot Water Solution

Ceiling cassette type **R410A**

1-way airflow type **PMFY-P VBM-E**

			PMFY-P20VBM-E	PMFY-P25VBM-E	PMFY-P32VBM-E	PMFY-P40VBM-E
Power source			1-phase 220-240V 50Hz / 1-phase 220V 60Hz			
Cooling capacity	*1	kW	2.2	2.8	3.6	4.5
	*1	BTU/h	7,500	9,600	12,300	15,400
Heating capacity	*1	kW	2.5	3.2	4.0	5.0
	*1	BTU/h	8,500	10,900	13,600	17,100
Power consumption	Cooling	kW	0.042	0.044	0.054	0.054
	Heating	kW	0.042	0.044	0.054	0.054
Current	Cooling	A	0.20	0.21	0.26	0.26
	Heating	A	0.20	0.21	0.26	0.26
External finish (Munsell No.)			White (0.98Y 8.99/0.63)			
Dimension	Unit	mm(in.)	230 x 812 x 395 (9-1/16 x 32 x 15-9/16)			
	Panel	mm(in.)	30 x 1000 x 470 (1-3/16 x 39-3/8 x 18-9/16)			
Net weight	Unit	kg(lbs.)	14 (31)			
	Panel	kg(lbs.)	3 (7)			
Heat exchanger			Cross fin (Aluminum plate fin and copper tube)			
FAN	Type		Line flow fan x 1			
	Airflow rate	*2 m ³ /min	6.5-7.2-8.0-8.7	7.3-8.0-8.6-9.3	7.7-8.7-9.7-10.7	
	(Lo-Mid2-Mid1-Hi)	L/s	108-120-133-145	122-133-143-155	128-145-162-178	
		cfm	230-254-283-307	258-283-304-328	272-307-343-378	
External static press.		Pa	0			
Motor	Type		1-phase induction motor			
	Output	kW	0.028			
Air filter			PP Honeycomb fabric			
Refrigerant pipe diameter	Gas(Flare)	mm(in.)	ø12.7 (ø1/2)			
	Liquid(Flare)	mm(in.)	ø6.35 (ø1/4)			
Field drain pipe diameter			O.D. 26 (1)			
Sound pressure level (Lo-Mid2-Mid1-Hi)			*2 *3 27-30-33-35	32-34-36-37	33-35-37-39	

Notes:

*1 Cooling/Heating capacity indicates the maximum value at operation under the following condition.

Cooling : Indoor 27°C(81°F)DB/19°C(66°F)WB, Outdoor 35°C(95°F)DB

Heating : Indoor 20°C(68°F)DB, Outdoor 7°C(45°F)DB/6°C(43°F)WB

*2 Airflow rate/Sound pressure level are in (low-middle2-middle1-high).

*3 It is measured in anechoic room.

Optional parts

Description	Model	Applicable capacity
Decoration panel	PMP-40BMW	P20, P25, P32, P40