



Refrigerant	<b>R410A</b>																																																																																																																																																																																																																																																																																																																																																
System	Air cooled																																																																																																																																																																																																																																																																																																																																																
Type	Heat pump						Heat recovery																																																																																																																																																																																																																																																																																																																																										
Model name	Y-Series <span style="background-color: #4CAF50; color: white; padding: 2px;">Standard</span>			Y-Series <span style="border: 1px solid #ccc; padding: 2px;">High efficiency</span>			R2-Series <span style="background-color: #4CAF50; color: white; padding: 2px;">Standard</span>			R2-Series <span style="border: 1px solid #ccc; padding: 2px;">High efficiency</span>																																																																																																																																																																																																																																																																																																																																							
	PUHY-P YNW-A2(-BS) PUHY-P YSNW-A2(-BS)			PUHY-EP YNW-A2(-BS) PUHY-EP YSNW-A2(-BS)			PURY-P YNW-A2(-BS) PURY-P YSNW-A2(-BS)			PURY-EP YNW-A2(-BS) PURY-EP YSNW-A2(-BS)																																																																																																																																																																																																																																																																																																																																							
Model	 size <span style="border: 1px solid #ccc; padding: 2px;">S</span> size <span style="border: 1px solid #ccc; padding: 2px;">L</span> size <span style="border: 1px solid #ccc; padding: 2px;">XL</span> *These images show the standard type.						 size <span style="border: 1px solid #ccc; padding: 2px;">S</span> size <span style="border: 1px solid #ccc; padding: 2px;">L</span> size <span style="border: 1px solid #ccc; padding: 2px;">XL</span> *These images show the standard type.																																																																																																																																																																																																																																																																																																																																										
modules	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>HP</th> <th>S</th> <th>L</th> <th>XL</th> <th>S</th> <th>L</th> <th>XL</th> <th>S</th> <th>L</th> <th>XL</th> <th>S</th> <th>L</th> <th>XL</th> </tr> </thead> <tbody> <tr><td>8HP P200</td><td style="background-color: #e0f2f1;">8</td><td></td><td></td><td style="background-color: #e0f2f1;">8</td><td></td><td></td><td style="background-color: #e0f2f1;">8</td><td></td><td></td><td style="background-color: #e0f2f1;">8</td><td></td><td></td></tr> <tr><td>10HP P250</td><td style="background-color: #e0f2f1;">10</td><td></td><td></td><td style="background-color: #e0f2f1;">10</td><td></td><td></td><td style="background-color: #e0f2f1;">10</td><td></td><td></td><td style="background-color: #e0f2f1;">10</td><td></td><td></td></tr> <tr><td>12HP P300</td><td style="background-color: #e0f2f1;">12</td><td></td><td></td><td style="background-color: #e0f2f1;">12</td><td></td><td></td><td style="background-color: #e0f2f1;">12</td><td></td><td></td><td style="background-color: #e0f2f1;">12</td><td></td><td></td></tr> <tr><td>14HP P350</td><td></td><td style="background-color: #e0f2f1;">14</td><td></td><td></td><td style="background-color: #e0f2f1;">14</td><td></td><td></td><td style="background-color: #e0f2f1;">14</td><td></td><td></td><td style="background-color: #e0f2f1;">14</td><td></td></tr> <tr><td>16HP P400</td><td style="background-color: #e0f2f1;">8 8</td><td style="background-color: #e0f2f1;">16</td><td></td><td style="background-color: #e0f2f1;">8 8</td><td style="background-color: #e0f2f1;">16</td><td></td><td style="background-color: #e0f2f1;">8 8</td><td style="background-color: #e0f2f1;">16</td><td></td><td style="background-color: #e0f2f1;">8 8</td><td style="background-color: #e0f2f1;">16</td><td></td></tr> <tr><td>18HP P450</td><td style="background-color: #e0f2f1;">8 10</td><td style="background-color: #e0f2f1;">18</td><td></td><td style="background-color: #e0f2f1;">8 10</td><td style="background-color: #e0f2f1;">18</td><td></td><td style="background-color: #e0f2f1;">8 10</td><td style="background-color: #e0f2f1;">18</td><td></td><td style="background-color: #e0f2f1;">8 10</td><td style="background-color: #e0f2f1;">18</td><td></td></tr> <tr><td>20HP P500</td><td style="background-color: #e0f2f1;">10 10</td><td></td><td style="background-color: #e0f2f1;">20</td><td style="background-color: #e0f2f1;">10 10</td><td></td><td style="background-color: #e0f2f1;">20</td><td style="background-color: #e0f2f1;">10 10</td><td></td><td style="background-color: #e0f2f1;">20</td><td style="background-color: #e0f2f1;">10 10</td><td></td><td style="background-color: #e0f2f1;">20</td></tr> <tr><td>22HP P550</td><td style="background-color: #e0f2f1;">10 12</td><td></td><td></td><td style="background-color: #e0f2f1;">10 12</td><td></td><td></td><td style="background-color: #e0f2f1;">10 12</td><td></td><td style="background-color: #e0f2f1;">22</td><td style="background-color: #e0f2f1;">10 12</td><td></td><td style="background-color: #e0f2f1;">22</td></tr> <tr><td>24HP P600</td><td style="background-color: #e0f2f1;">12 12</td><td></td><td></td><td style="background-color: #e0f2f1;">12 12</td><td></td><td></td><td style="background-color: #e0f2f1;">12 12</td><td></td><td></td><td style="background-color: #e0f2f1;">12 12</td><td></td><td></td></tr> <tr><td>26HP P650</td><td style="background-color: #e0f2f1;">10</td><td style="background-color: #e0f2f1;">16</td><td></td><td style="background-color: #e0f2f1;">10</td><td style="background-color: #e0f2f1;">16</td><td></td><td style="background-color: #e0f2f1;">12</td><td style="background-color: #e0f2f1;">14</td><td></td><td style="background-color: #e0f2f1;">12</td><td style="background-color: #e0f2f1;">14</td><td></td></tr> <tr><td>28HP P700</td><td></td><td style="background-color: #e0f2f1;">14 14</td><td></td><td></td><td style="background-color: #e0f2f1;">14 14</td><td></td><td></td><td style="background-color: #e0f2f1;">14 14</td><td></td><td></td><td style="background-color: #e0f2f1;">14 14</td><td></td></tr> <tr><td>30HP P750</td><td></td><td style="background-color: #e0f2f1;">14 16</td><td></td><td></td><td style="background-color: #e0f2f1;">14 16</td><td></td><td></td><td style="background-color: #e0f2f1;">14 16</td><td></td><td></td><td style="background-color: #e0f2f1;">14 16</td><td></td></tr> <tr><td>32HP P800</td><td></td><td style="background-color: #e0f2f1;">14 18</td><td></td><td></td><td style="background-color: #e0f2f1;">14 18</td><td></td><td></td><td style="background-color: #e0f2f1;">16 16</td><td></td><td></td><td style="background-color: #e0f2f1;">16 16</td><td></td></tr> <tr><td>34HP P850</td><td></td><td style="background-color: #e0f2f1;">16 18</td><td></td><td></td><td style="background-color: #e0f2f1;">16 18</td><td></td><td></td><td style="background-color: #e0f2f1;">16 18</td><td></td><td></td><td style="background-color: #e0f2f1;">16 18</td><td></td></tr> <tr><td>36HP P900</td><td></td><td style="background-color: #e0f2f1;">18 18</td><td></td><td></td><td style="background-color: #e0f2f1;">18 18</td><td></td><td></td><td style="background-color: #e0f2f1;">18 18</td><td></td><td></td><td style="background-color: #e0f2f1;">18 18</td><td></td></tr> <tr><td>38HP P950</td><td style="background-color: #e0f2f1;">10</td><td style="background-color: #e0f2f1;">14 14</td><td></td><td style="background-color: #e0f2f1;">10</td><td style="background-color: #e0f2f1;">14 14</td><td></td><td></td><td style="background-color: #e0f2f1;">18</td><td style="background-color: #e0f2f1;">20</td><td></td><td style="background-color: #e0f2f1;">18</td><td style="background-color: #e0f2f1;">20</td></tr> <tr><td>40HP P1000</td><td style="background-color: #e0f2f1;">10</td><td style="background-color: #e0f2f1;">14 16</td><td></td><td style="background-color: #e0f2f1;">10</td><td style="background-color: #e0f2f1;">14 16</td><td></td><td></td><td></td><td style="background-color: #e0f2f1;">20 20</td><td></td><td></td><td style="background-color: #e0f2f1;">20 20</td></tr> <tr><td>42HP P1050</td><td style="background-color: #e0f2f1;">10</td><td style="background-color: #e0f2f1;">16 16</td><td></td><td style="background-color: #e0f2f1;">10</td><td style="background-color: #e0f2f1;">16 16</td><td></td><td></td><td></td><td style="background-color: #e0f2f1;">20 22</td><td></td><td></td><td style="background-color: #e0f2f1;">20 22</td></tr> <tr><td>44HP P1100</td><td></td><td style="background-color: #e0f2f1;">14 14 16</td><td></td><td></td><td style="background-color: #e0f2f1;">14 14 16</td><td></td><td></td><td></td><td style="background-color: #e0f2f1;">22 22</td><td></td><td></td><td style="background-color: #e0f2f1;">22 22</td></tr> <tr><td>46HP P1150</td><td></td><td style="background-color: #e0f2f1;">14 16 16</td><td></td><td></td><td style="background-color: #e0f2f1;">14 16 16</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>48HP P1200</td><td></td><td style="background-color: #e0f2f1;">16 16 16</td><td></td><td></td><td style="background-color: #e0f2f1;">16 16 16</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>50HP P1250</td><td></td><td style="background-color: #e0f2f1;">16 16 18</td><td></td><td></td><td style="background-color: #e0f2f1;">16 16 18</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>52HP P1300</td><td></td><td style="background-color: #e0f2f1;">16 18 18</td><td></td><td></td><td style="background-color: #e0f2f1;">16 18 18</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>54HP P1350</td><td></td><td style="background-color: #e0f2f1;">18 18 18</td><td></td><td></td><td style="background-color: #e0f2f1;">18 18 18</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>												HP	S	L	XL	S	L	XL	S	L	XL	S	L	XL	8HP P200	8			8			8			8			10HP P250	10			10			10			10			12HP P300	12			12			12			12			14HP P350		14			14			14			14		16HP P400	8 8	16		8 8	16		8 8	16		8 8	16		18HP P450	8 10	18		8 10	18		8 10	18		8 10	18		20HP P500	10 10		20	10 10		20	10 10		20	10 10		20	22HP P550	10 12			10 12			10 12		22	10 12		22	24HP P600	12 12			12 12			12 12			12 12			26HP P650	10	16		10	16		12	14		12	14		28HP P700		14 14			14 14			14 14			14 14		30HP P750		14 16			14 16			14 16			14 16		32HP P800		14 18			14 18			16 16			16 16		34HP P850		16 18			16 18			16 18			16 18		36HP P900		18 18			18 18			18 18			18 18		38HP P950	10	14 14		10	14 14			18	20		18	20	40HP P1000	10	14 16		10	14 16				20 20			20 20	42HP P1050	10	16 16		10	16 16				20 22			20 22	44HP P1100		14 14 16			14 14 16				22 22			22 22	46HP P1150		14 16 16			14 16 16								48HP P1200		16 16 16			16 16 16								50HP P1250		16 16 18			16 16 18								52HP P1300		16 18 18			16 18 18								54HP P1350		18 18 18			18 18 18							
HP	S	L	XL	S	L	XL	S	L	XL	S	L	XL																																																																																																																																																																																																																																																																																																																																					
8HP P200	8			8			8			8																																																																																																																																																																																																																																																																																																																																							
10HP P250	10			10			10			10																																																																																																																																																																																																																																																																																																																																							
12HP P300	12			12			12			12																																																																																																																																																																																																																																																																																																																																							
14HP P350		14			14			14			14																																																																																																																																																																																																																																																																																																																																						
16HP P400	8 8	16		8 8	16		8 8	16		8 8	16																																																																																																																																																																																																																																																																																																																																						
18HP P450	8 10	18		8 10	18		8 10	18		8 10	18																																																																																																																																																																																																																																																																																																																																						
20HP P500	10 10		20	10 10		20	10 10		20	10 10		20																																																																																																																																																																																																																																																																																																																																					
22HP P550	10 12			10 12			10 12		22	10 12		22																																																																																																																																																																																																																																																																																																																																					
24HP P600	12 12			12 12			12 12			12 12																																																																																																																																																																																																																																																																																																																																							
26HP P650	10	16		10	16		12	14		12	14																																																																																																																																																																																																																																																																																																																																						
28HP P700		14 14			14 14			14 14			14 14																																																																																																																																																																																																																																																																																																																																						
30HP P750		14 16			14 16			14 16			14 16																																																																																																																																																																																																																																																																																																																																						
32HP P800		14 18			14 18			16 16			16 16																																																																																																																																																																																																																																																																																																																																						
34HP P850		16 18			16 18			16 18			16 18																																																																																																																																																																																																																																																																																																																																						
36HP P900		18 18			18 18			18 18			18 18																																																																																																																																																																																																																																																																																																																																						
38HP P950	10	14 14		10	14 14			18	20		18	20																																																																																																																																																																																																																																																																																																																																					
40HP P1000	10	14 16		10	14 16				20 20			20 20																																																																																																																																																																																																																																																																																																																																					
42HP P1050	10	16 16		10	16 16				20 22			20 22																																																																																																																																																																																																																																																																																																																																					
44HP P1100		14 14 16			14 14 16				22 22			22 22																																																																																																																																																																																																																																																																																																																																					
46HP P1150		14 16 16			14 16 16																																																																																																																																																																																																																																																																																																																																												
48HP P1200		16 16 16			16 16 16																																																																																																																																																																																																																																																																																																																																												
50HP P1250		16 16 18			16 16 18																																																																																																																																																																																																																																																																																																																																												
52HP P1300		16 18 18			16 18 18																																																																																																																																																																																																																																																																																																																																												
54HP P1350		18 18 18			18 18 18																																																																																																																																																																																																																																																																																																																																												

\*   Indicates single modules and   indicates combination modules.

\*The circled numbers in the table indicate the horse power, and the combination of S, L, and XL modules.

\*For combination modules, be sure to check the complete module's model name including the last part of the model name (e.g.: -A2). Please refer to the "Set Model" rows in the "SPECIFICATIONS".

## Y-Series

Standard

R410A

## PUHY-P YNW-A2(-BS)



Model	PUHY-P200YNW-A2(-BS)		PUHY-P250YNW-A2 (-BS)	PUHY-P300YNW-A2 (-BS)	
Power source	3-phase 4-wire 380-400-415 V 50/60 Hz		3-phase 4-wire 380-400-415 V 50/60 Hz	3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	22.4	33.5	
		BTU / h	76,400	114,300	
		Power input kW	6.03	11.31	
		Current input A	10.1-9.6-9.3	19.0-18.1-17.4	
		EER	3.71	2.96	
	SEER	7.65	6.90		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	
Heating capacity (Max)	*2	kW	25.0	37.5	
		BTU / h	85,300	128,000	
		Power input kW	6.08	10.30	
		Current input A	10.2-9.7-9.3	17.3-16.5-15.9	
		COP	4.11	3.64	
	(Nominal)	*3	kW	22.4	33.5
		BTU / h	76,400	114,300	
		Power input kW	5.18	8.74	
		Current input A	8.7-8.3-8.0	14.7-14.0-13.5	
		COP	4.32	3.83	
	SCOP	4.35	4.12		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity			
	Model / Quantity	P10~P250, M20~M140/1~20			
Sound pressure level (measured in anechoic room)	*4, 5	dB <A>	58.0/59.0	61.0/64.5	
Sound power level (measured in anechoic room)	*4	dB <A>	75/77	80/84	
Refrigerant piping diameter	Liquid pipe	mm (in.)	9.52 (3/8) Brazed	9.52 (3/8) Brazed	
	Gas pipe	mm (in.)	22.2 (7/8) Brazed	22.2 (7/8) Brazed	
FAN	Type x Quantity	Propeller fan x 1			
	Air flow rate	m <sup>3</sup> /min	170	240	
		L/s	2,833	4,000	
		cfm	6,003	8,474	
	Control, Driving mechanism	Inverter-control, Direct-driven by motor			
	Motor output	kW	0.92 x 1	0.92 x 1	
*6 External static press.	0 Pa (0 mmH <sub>2</sub> O)				
Compressor	Type	Inverter scroll hermetic compressor			
	Starting method	Inverter			
	Motor output	kW	3.5	6.7	
	Case heater	-			
External finish	Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>				
External dimension HxWxD	mm	1,858 (1,798 without legs) x 920 x 740			
	in.	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16			
Protection devices	High pressure protection	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)			
	Inverter circuit (COMP./FAN)	Over-heat protection, Over-current protection			
	Compressor	-			
	Fan motor	-			
Refrigerant	Type x original charge	R410A x 6.5 kg (15 lbs)			
Net weight	kg (lbs)	213 (470)			
Heat exchanger	Salt-resistant cross fin & copper tube				
Optional parts	Joint: CMY-Y102SS/LS-G2 Header: CMY-Y104/108/1010-G				

## Notes:

\*1,\*2,\*3 Nominal conditions (subject to JIS B8615-2)

	Indoor	Outdoor	Pipe length	Level difference
Cooling	27°C DB/19°C WB (81°F DB/66°F WB)	35°C DB (95°F DB)	7.5m (24-9/16ft.)	0m (0ft.)
Heating	20°C DB(68°F DB)	7°C DB/6°C WB(45°F DB/43°F WB)	7.5m (24-9/16ft.)	0m (0ft.)

\*3 Eurovent registered

\*4 Cooling mode / Heating mode

\*5 The sound pressure level measured by the conventional method in JIS for reference purpose.

\*6 External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH<sub>2</sub>O, 6.1 mmH<sub>2</sub>O, 8.2 mmH<sub>2</sub>O).

Consult your dealer about the specification when setting External static pressure option.

\*Due to continuing improvement, above specifications may be subject to change without notice.

# Y-Series

Standard

R410A

## PUHY-P YNW-A2(-BS)



Model	PUHY-P350YNW-A2 (-BS)		PUHY-P400YNW-A2 (-BS)		PUHY-P450YNW-A2 (-BS)		PUHY-P500YNW-A2 (-BS)		
Power source	3-phase 4-wire 380-400-415 V 50/60 Hz		3-phase 4-wire 380-400-415 V 50/60 Hz		3-phase 4-wire 380-400-415 V 50/60 Hz		3-phase 4-wire 380-400-415 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW	40.0	45.0	50.0	56.0			
		BTU / h	136,500	153,500	170,600	191,100			
		Power input kW	13.98	17.57	18.86	21.05			
		Current input A	23.6-22.4-21.6	29.6-28.1-27.1	31.8-30.2-29.1	35.5-33.7-32.5			
		EER	2.86	2.56	2.65	2.66			
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)		15.0~24.0°C (59~75°F)		15.0~24.0°C (59~75°F)		
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)		-5.0~52.0°C (23~126°F)		-5.0~52.0°C (23~126°F)		
Heating capacity (Max)	*2	kW	45.0	50.0	56.0	63.0			
		BTU / h	153,500	170,600	191,100	215,000			
		Power input kW	12.32	14.20	16.51	17.89			
		Current input A	20.7-19.7-19.0	23.9-22.7-21.9	27.8-26.4-25.5	30.2-28.6-27.6			
		COP	3.65	3.52	3.39	3.52			
	(Nominal)	*3	kW	40.0	45.0	50.0	56.0		
			BTU / h	136,500	153,500	170,600	191,100		
			Power input kW	10.20	12.00	13.77	14.85		
			Current input A	17.2-16.3-15.7	20.2-19.2-18.5	23.2-22.0-21.2	25.0-23.8-22.9		
			COP	3.92	3.75	3.63	3.77		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)		15.0~27.0°C (59~81°F)		15.0~27.0°C (59~81°F)		
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)		-20.0~15.5°C (-4~60°F)		-20.0~15.5°C (-4~60°F)		
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		50~130% of outdoor unit capacity		50~130% of outdoor unit capacity			
	Model / Quantity	P10~P250, M20~M140/1~35		P10~P250, M20~M140/1~40		P10~P250, M20~M140/1~45			
Sound pressure level (measured in anechoic room)	*4, 5	dB <A>	62.0/64.5		65.0/67.0		65.5/71.0		
Sound power level (measured in anechoic room)	*4	dB <A>	80/84		82/86		84/90		
Refrigerant piping diameter	Liquid pipe	mm (in.)	12.7 (1/2) Brazed		12.7 (1/2) Brazed		15.88 (5/8) Brazed		
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed		
FAN	Type x Quantity	Propeller fan x 2		Propeller fan x 2		Propeller fan x 2			
	Air flow rate	m <sup>3</sup> /min	270		300		305		
		L/s	4,500		5,000		5,083		
		cfm	9,534		10,593		10,770		
	Control, Driving mechanism	Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor			
	Motor output	kW	0.46 x 2		0.46 x 2		0.92 x 2		
Compressor	*6 External static press.	0 Pa (0 mmH <sub>2</sub> O)		0 Pa (0 mmH <sub>2</sub> O)		0 Pa (0 mmH <sub>2</sub> O)			
	Type	Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor			
	Starting method	Inverter		Inverter		Inverter			
	Motor output	kW	8.6		11.4		11.7		
Case heater	kW	-		-		-			
External finish	Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>		
External dimension HxWxD	mm	1,858 (1,798 without legs) x 1,240 x 740		1,858 (1,798 without legs) x 1,240 x 740		1,858 (1,798 without legs) x 1,240 x 740			
		73-3/16 (70-13/16 without legs) x 48-7/8 x 29-3/16		73-3/16 (70-13/16 without legs) x 48-7/8 x 29-3/16		73-3/16 (70-13/16 without legs) x 48-7/8 x 29-3/16			
Protection devices	High pressure protection	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)			
	Inverter circuit (COMP./FAN)	Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection			
	Compressor	-		-		-			
	Fan motor	-		-		-			
Refrigerant	Type x original charge	R410A x 9.8 kg (22 lbs)		R410A x 9.8 kg (22 lbs)		R410A x 10.8 kg (24 lbs)			
Net weight	kg (lbs)	277 (611)		277 (611)		293 (646)			
Heat exchanger	Salt-resistant cross fin & copper tube		Salt-resistant cross fin & copper tube		Salt-resistant cross fin & copper tube		Salt-resistant cross fin & copper tube		
Optional parts	Joint: CMY-Y102SS/LS-G2, CMY-Y202S-G2 Header: CMY-Y104/108/1010-G		Joint: CMY-Y102SS/LS-G2, CMY-Y202S-G2 Header: CMY-Y104/108/1010-G		Joint: CMY-Y102SS/LS-G2, CMY-Y202S-G2 Header: CMY-Y104/108/1010-G		Joint: CMY-Y102SS/LS-G2, CMY-Y202S-G2 Header: CMY-Y104/108/1010-G		

**Notes:**

\*1,\*2,\*3 Nominal conditions (subject to JIS B8615-2)

	Indoor	Outdoor	Pipe length	Level difference
Cooling	27°C DB/19°C WB (81°F DB/66°F WB)	35°C DB (95°F DB)	7.5m (24-9/16ft.)	0m (0ft.)
Heating	20°C DB(68°F DB)	7°C DB/6°C WB(45°F DB/43°F WB)	7.5m (24-9/16ft.)	0m (0ft.)

\*3 Eurovent registered

\*4 Cooling mode / Heating mode

\*5 The sound pressure level measured by the conventional method in JIS for reference purpose.

\*6 External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH<sub>2</sub>O, 6.1 mmH<sub>2</sub>O, 8.2 mmH<sub>2</sub>O).

Consult your dealer about the specification when setting External static pressure option.

\*Due to continuing improvement, above specifications may be subject to change without notice.

Lineup & Functions  
Y-Series  
R2-Series  
ZUBADAN-Series  
S-Series  
BC Controllers  
Ceiling cassette type  
Ceiling concealed type  
Ceiling suspended type  
Wall-mounted type  
Floor standing type  
Functions  
LOSSNAY System  
Remote Controller  
Hot Water Solution

# Y-Series


R32  
R410A

Cooling or Heating Heat pump

- Features ..... P.17 - P.21
- Specifications
  - R32**
    - Standard PUHY-M YNW-A1(-BS) ..... P.22
    - High efficiency PUHY-EM YNW-A1(-BS) ..... P.23
  - R410A**
    - Standard PUHY-P Y(S)NW-A2(-BS) ..... P.24 - P.35
    - High efficiency PUHY-EP Y(S)NW-A2(-BS) ..... P.36 - P.47
- Optional parts ..... P.48
- Technologies and functions ..... P.153



\*This image shows the R410A standard type.

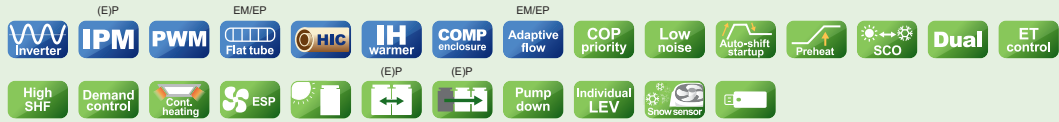


## A two-pipe zoned system designed for heat pump operation

The CITY MULTI Y-Series (for large applications) makes use of a two-pipe refrigerant system, which allows for system changeover from cooling to heating, ensuring that a constant indoor climate is maintained in all zones. The compact outdoor unit utilizes an inverter-driven compressor for effective energy use.

With a wide lineup of indoor units connected to a flexible piping system, the CITY MULTI Series can be configured to suit diverse applications. Up to 50 (Y-Series) indoor units can be connected with up to 130% connected capacity to maximize engineering design options. This feature allows easy air conditioning in each area with convenient individual controllers.

- Installation image (R410A Y-Series)

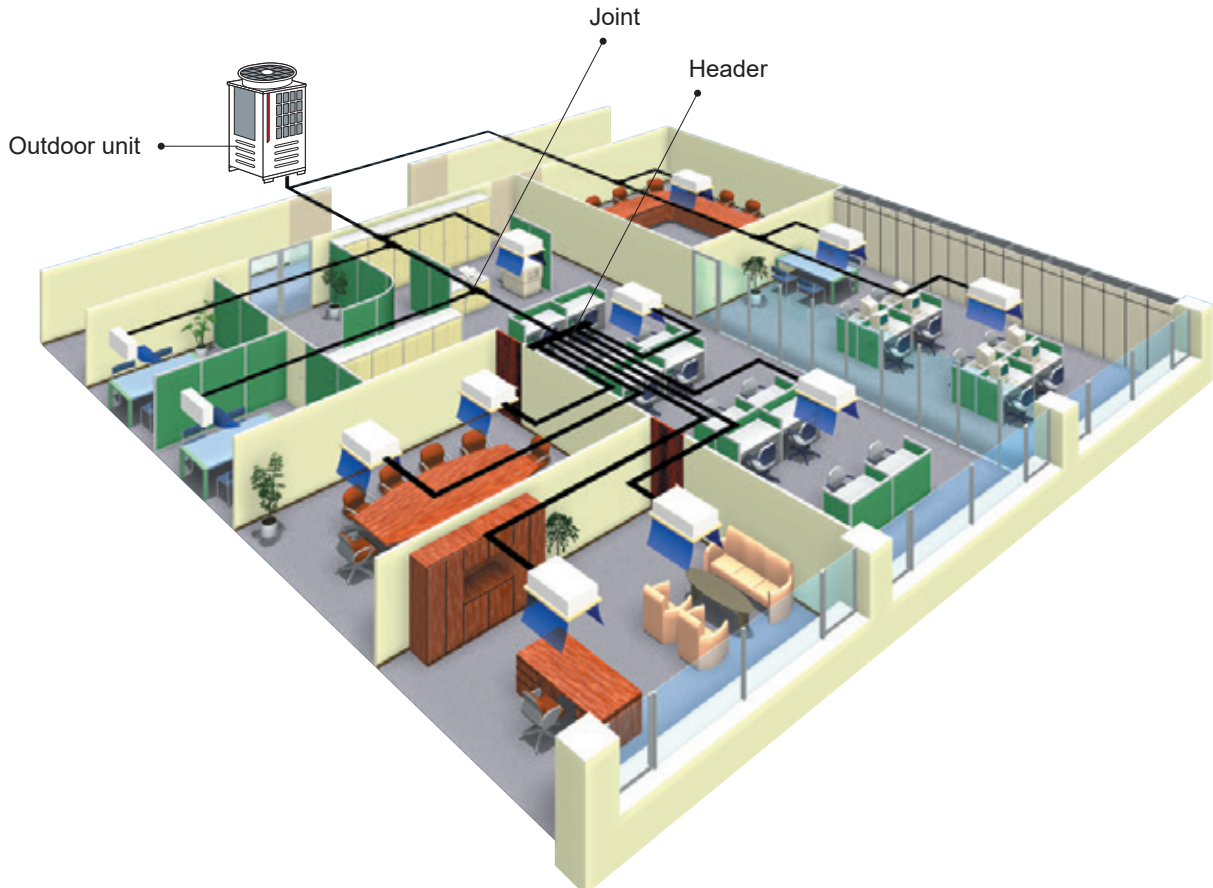

\*For details of the installation restrictions, refer to the DATABOOK.

# Y-Series Standard R32

## PUHY-M YNW-A1(-BS)



Model		PUHY-M200YNW-A1 (-BS)	PUHY-M250YNW-A1 (-BS)	PUHY-M300YNW-A1 (-BS)	
Power source		3-phase 4-wire 380-400-415 V 50/60 Hz	3-phase 4-wire 380-400-415 V 50/60 Hz	3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	22.4	28.0	
		BTU/h	76,400	95,500	
	Power input	kW	6.03	9.62	
	Current input	A	7.9-7.5-7.2	11.7-11.1-10.7	
	EER	kW/kW	3.71	2.91	
	SEER	kW/kW	7.65	6.90	
Temp. range of cooling	Indoor	W.B.	15.0~24.0 °C (59~75 °F)	15.0~24.0 °C (59~75 °F)	
	Outdoor	D.B.	-5.0~52.0 °C (23~126 °F)	-5.0~52.0 °C (23~126 °F)	
Heating capacity (Max)	*2	kW	25.0	31.5	
		BTU/h	85,300	107,500	
	Power input	kW	5.08	7.14	
	Current input	A	8.5-8.1-7.8	12.0-11.4-11.0	
	COP	kW/kW	4.11	3.71	
	(Nominal)	*3	kW	22.4	28.0
			BTU/h	76,400	95,500
		Power input	kW	5.18	7.01
		Current input	A	7.3-6.9-6.6	10.0-9.5-9.1
	COP	kW/kW	4.32	3.99	
SCOP	kW/kW	4.35	4.39		
Temp. range of heating	Indoor	D.B.	15.0~27.0 °C (59~81 °F)	15.0~27.0 °C (59~81 °F)	
	Outdoor	W.B.	-20.0~15.5 °C (-4~60 °F)	-20.0~15.5 °C (-4~60 °F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity			
	Model / Quantity	M20-M140/1~8	M20-M140/1~10	M20-M140/2~12	
Sound pressure level (measured in anechoic room)	*4, 5	dB <A>	58.0 / 59.0	60.0 / 61.0	
Sound power level (measured in anechoic room)	*4	dB <A>	75.0 / 78.0	78.0 / 80.0	
Refrigerant piping diameter	Liquid pipe	mm (in.)	9.52 (3/8) Brazed	9.52 (3/8) Brazed	
	Gas pipe	mm (in.)	22.2 (7/8) Brazed	22.2 (7/8) Brazed	
FAN	Type x Quantity		Propeller fan x 1		
	Air flow rate	m <sup>3</sup> /min	170	185	
		L/s	2,833	3,083	
		cfm	6,003	6,532	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		
	Motor output	kW	0.92 x 1	0.92 x 1	
	*6 External static press.	0 Pa (0 mmH <sub>2</sub> O)			
Compressor	Type		Inverter scroll hermetic compressor		
	Starting method		Inverter		
	Motor output	kW	3.5	5.3	
	Case heater	kW	-	-	
External finish		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>			
External dimension HxWxD	mm	1,858 (1,798 without legs) x 920 x 740	1,858 (1,798 without legs) x 920 x 740	1,858 (1,798 without legs) x 920 x 740	
	in.	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		
	Compressor		-		
	Fan motor		-		
Refrigerant	Type x original charge		R32 x 6.5 kg (15 lbs)		
	Control		LEV and HIC circuit		
Net weight	kg (lbs)	222 (490)	222 (490)	223 (492)	
Heat exchanger		Salt-resistant cross fin & copper tube			
Optional parts		Joint: CMY-Y102SS/LS-G2 Header: CMY-Y104/108/1010-G			

### Notes:

\*1, \*2, \*3 Nominal conditions (subject to JIS B8615-2)

	Indoor	Outdoor	Pipe length	Level difference
Cooling	27°C DB/19°C WB (81°F DB/66°F WB)	35°C DB/24°C WB (95°F DB/75°F WB)	7.5m (24-9/16ft.)	0m (0ft.)
Heating	20°C DB(68°F DB)	7°C DB/6°C WB(45°F DB/43°F WB)	7.5m (24-9/16ft.)	0m (0ft.)

\*4 Cooling mode/Heating mode

\*5 The sound pressure level measured by the conventional method in JIS for reference purpose.

\*6 External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH<sub>2</sub>O, 6.1 mmH<sub>2</sub>O, 8.2 mmH<sub>2</sub>O).

Consult your dealer about the specification when setting External static pressure option.

\*7 R32 is flammable, and certain restrictions apply to the installation of units.

When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.

For detail, refer to the section in the Databook on installation restrictions.

# Y-Series High efficiency R32

## PUHY-EM YNW-A1(-BS)



Model		PUHY-EM200YNW-A1 (-BS)	PUHY-EM250YNW-A1 (-BS)	PUHY-EM300YNW-A1 (-BS)	
Power source		3-phase 4-wire 380-400-415 V 50/60 Hz			
Cooling capacity (Nominal)	*1	kW	22.4	28.0	
		BTU/h	76,400	95,500	
	Power input	kW	5.51	8.21	
	Current input	A	7.3-7.0-6.7	10.7-10.1-9.8	
	EER	kW/kW	4.06	3.41	
	SEER	kW/kW	7.76	7.51	
Temp. range of cooling	Indoor	W.B.	15.0~24.0 °C (59~75 °F)		
	Outdoor	D.B.	-5.0~52.0 °C (23~126 °F)		
Heating capacity (Max)	*2	kW	25.0	31.5	
		BTU/h	85,300	107,500	
	Power input	kW	4.94	6.92	
	Current input	A	8.3-7.9-7.6	11.6-11.0-10.6	
	COP	kW/kW	4.21	3.87	
	(Nominal)	*3	kW	22.4	28.0
			BTU/h	76,400	95,500
		Power input	kW	5.01	6.84
		Current input	A	7.1-6.8-6.5	9.8-9.3-9.0
	COP	kW/kW	4.47	4.09	
SCOP	kW/kW	4.36	4.40		
Temp. range of heating	Indoor	D.B.	15.0~27.0 °C (59~81 °F)		
	Outdoor	W.B.	-20.0~15.5 °C (-4~60 °F)		
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity			
	Model / Quantity	M20~M140/1~8	M20~M140/1~10	M20~M140/2~12	
Sound pressure level (measured in anechoic room)	*4, 5	dB <A>		61.0 / 64.5	
Sound power level (measured in anechoic room)	*4	dB <A>		80.0 / 83.5	
Refrigerant piping diameter	Liquid pipe	mm (in.)		9.52 (3/8) Brazed	
	Gas pipe	mm (in.)		22.2 (7/8) Brazed	
FAN	Type x Quantity		Propeller fan x 1		
	Air flow rate	m <sup>3</sup> /min	170	185	
		L/s	2,833	3,083	
		cfm	6,003	6,532	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		
	Motor output	kW	0.92 x 1		
*6	External static press.	0 Pa (0 mmH <sub>2</sub> O)			
Compressor	Type		Inverter scroll hermetic compressor		
	Starting method		Inverter		
	Motor output	kW	3.4	5.1	
	Case heater	kW	-	-	
External finish		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>			
External dimension HxWxD	mm	1,858 (1,798 without legs) x 920 x 740			
	in.	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16			
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		
	Compressor		-		
	Fan motor		-		
Refrigerant	Type x original charge		R32 x 6.5 kg (15 lbs)		
	Control		LEV and HIC circuit		
Net weight	kg (lbs)	228 (503)			
Heat exchanger		Salt-resistant cross fin & aluminium tube			
Optional parts		Joint: CMY-Y102SS/LS-G2 Header: CMY-Y104/108/1010-G			

**Notes:**

\*1, \*2, \*3 Nominal conditions (subject to JIS B8615-2)

	Indoor	Outdoor	Pipe length	Level difference
Cooling	27°C DB/19°C WB (81°F DB/66°F WB)	35°C DB/24°C WB (95°F DB/75°F WB)	7.5m (24-9/16ft.)	0m (0ft.)
Heating	20°C DB(68°F DB)	7°C DB/6°C WB(45°F DB/43°F WB)	7.5m (24-9/16ft.)	0m (0ft.)

\*4 Cooling mode/Heating mode

\*5 The sound pressure level measured by the conventional method in JIS for reference purpose.

\*6 External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH<sub>2</sub>O, 6.1 mmH<sub>2</sub>O, 8.2 mmH<sub>2</sub>O). Consult your dealer about the specification when setting External static pressure option.

\*7 R32 is flammable, and certain restrictions apply to the installation of units.

When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed. For detail, refer to the section in the Databook on installation restrictions.

Lineup & Functions

Y-Series

R2-Series

ZUBADAN-Series

S-Series

BC Controllers

Ceiling cassette type

Ceiling concealed type

Ceiling suspended type

Wall-mounted type

Floor standing type

Functions

LOSSNAY System

Remote Controller

Hot Water Solution