

R2-Series

R32
R410A

Simultaneous Cooling and Heating Heat recovery

- Features P.15 - P.21
- Specifications
 - R32**
 - Standard **PURY-M YNW-A1(-BS)** P.49
 - High efficiency **PURY-EM YNW-A1(-BS)** P.50
 - R410A**
 - Standard **PURY-P Y(S)NW-A2/TR2/RU2(-BS)** P.51 - P.60
 - High efficiency **PURY-EP Y(S)NW-A2/TR2/RU2(-BS)** P.61 - P.71
- Optional parts P.72
- BC controllers P.93 - P.101
- Technologies and functions P.153




*This image shows the standard type.

The world's first two-pipe system that simultaneously cools and heats

The CITY MULTI R2-Series offers the ultimate in freedom and flexibility. Cool one zone while heating another. Our exclusive BC controller makes two-pipe simultaneous cooling and heating possible. It is the technological heart of the CITY MULTI R2-Series. It houses a liquid and gas separator, allowing the outdoor unit to deliver a mixture of hot gas for heating and liquid for cooling, all through the same pipe.


This innovation results in virtually no energy wasted by being expelled outdoors. Depending on capacity, up to 50 indoor units can be connected with up to 150% connected capacity.

- Installation image (R410A R2-Series)

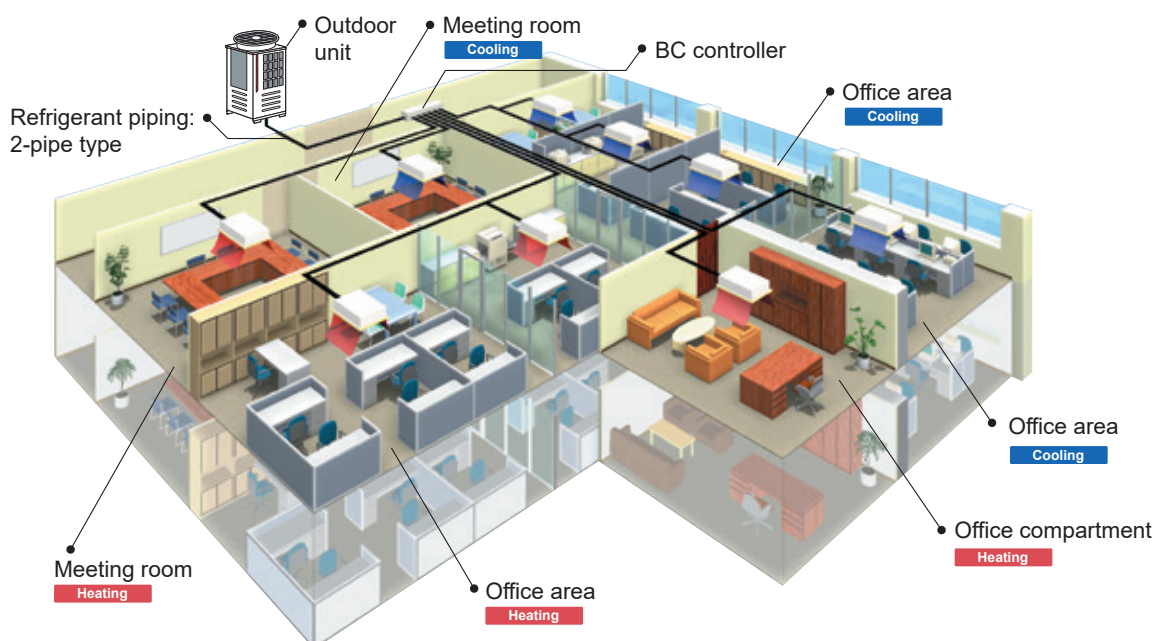

*For details of the installation restrictions, refer to the DATABOOK.

- System example

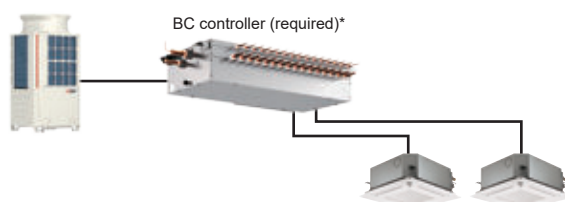

*R2-Series systems require the use of a BC controller.

R32 CITY MULTI-Series R32

17

CITY MULTI series utilizing R32 refrigerant. The lower GWP R32 model is a solution to reduce fluorocarbon emissions.




Low-GWP refrigerant

Adoption of R32 refrigerant

CITY MULTI series uses R32 with a 67% lower GWP than R410A to be more environmentally friendly.*1

*1. Source: IPCC 4th Assessment Report, global warming potential (GWP) 100-year value. Comparison of 2088 (R410A) and 675 (R32).

- Comparison of global warming potential

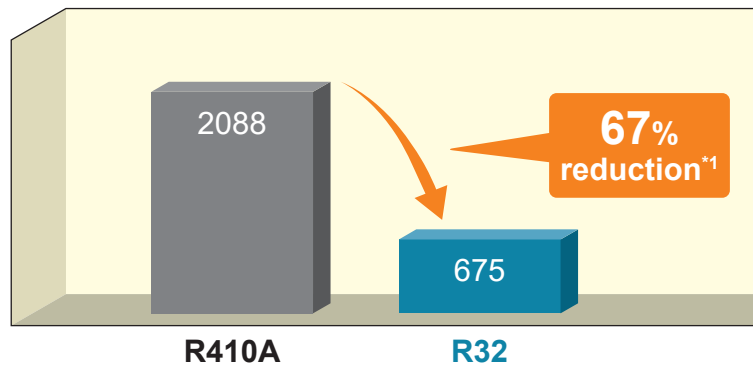


Development of compressor for adopting R32 refrigerant

Stable operation with suction chamber injection mechanism

To suppress rises in discharge temperature, Mitsubishi Electric has developed a compressor that adopts a suction chamber injection mechanism. This solves the problem that R32 has a higher discharge temperature than R410A.

- A mechanism for injecting

This mechanism suppresses the temperature rise of the discharge gas and supports operation in a wide temperature range.

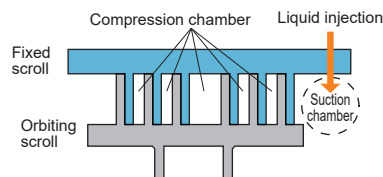


Reduced the amount of refrigerant

Reduced piping diameter

Compared to R410A, R32 is less susceptible to pressure-loss. This characteristics helps to reduce the refrigerant pipe size, reducing the refrigerant amount and the installation cost.

- Comparison of refrigerant piping diameter



Lineup & Functions

Y-Series

R2-Series

ZUBADAN
-Series

S-Series

BC Controllers

Ceiling
cassette type

Ceiling
concealed type

Ceiling
suspended type

Wall-mounted
type

Floor standing
type

Functions

LOSSNAY
System

Remote
Controller

Hot Water
Solution

R2-Series

Standard

R32

PURY-M YNW-A1(-BS)



Model			PURY-M200YNW-A1 (-BS)		PURY-M250YNW-A1 (-BS)		PURY-M300YNW-A1 (-BS)		
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		3-phase 4-wire 380-400-415 V 50/60 Hz		3-phase 4-wire 380-400-415 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW	22.4		28.0		33.5		
		BTU/h	76,400		95,500		114,300		
	Power input	kW	6.68		10.25		11.75		
	Current input	A	8.1-7.7-7.4		11.9-11.3-10.9		14.6-13.9-13.4		
	EER	kW/kW	3.35		2.73		2.85		
Temp. range of cooling	Indoor	W.B.	15.0~24.0 °C (59~75 °F)		15.0~24.0 °C (59~75 °F)		15.0~24.0 °C (59~75 °F)		
		D.B.	-5.0~52.0 °C (23~126 °F)		-5.0~52.0 °C (23~126 °F)		-5.0~52.0 °C (23~126 °F)		
	Outdoor	W.B.	15.0~24.0 °C (59~75 °F)		15.0~24.0 °C (59~75 °F)		15.0~24.0 °C (59~75 °F)		
		D.B.	-5.0~52.0 °C (23~126 °F)		-5.0~52.0 °C (23~126 °F)		-5.0~52.0 °C (23~126 °F)		
	Heating capacity (Max)	*2	kW	25.0		31.5		37.5	
BTU/h			85,300		107,500		128,000		
Power input		kW	5.27		7.32		9.35		
Current input		A	8.8-8.4-8.1		12.3-11.7-11.3		15.7-14.9-14.4		
COP		kW/kW	3.68		3.29		3.48		
(Nominal)		*3	kW	22.4		28.0		33.5	
			BTU/h	76,400		95,500		114,300	
		Power input	kW	5.38		7.36		9.62	
		Current input	A	7.4-7.0-6.8		10.3-9.8-9.4		13.3-12.6-12.1	
		COP	kW/kW	4.16		3.80		3.48	
SCOP	kW/kW	4.01		4.01		4.01			
Temp. range of heating	Indoor	D.B.	15.0~27.0 °C (59~81 °F)		15.0~27.0 °C (59~81 °F)		15.0~27.0 °C (59~81 °F)		
	Outdoor	W.B.	-20.0~15.5 °C (-4~60 °F)		-20.0~15.5 °C (-4~60 °F)		-20.0~15.5 °C (-4~60 °F)		
Indoor unit connectable	Total capacity		50~150% of outdoor unit capacity		50~150% of outdoor unit capacity		50~150% of outdoor unit capacity		
	Model / Quantity		M20~M140/1~9 *8		M20~M140/1~11 *9		M20~M140/2~14 *10		
Sound pressure level (measured in anechoic room)		*4, 5	dB <A>		59.0/59.0		60.5/61.0		
Sound power level (measured in anechoic room)		*4	dB <A>		76.0/78.0		78.5/80.0		
Refrigerant piping diameter	High pressure	mm (in.)	15.88 (5/8) Brazed		15.88 (5/8) Brazed		15.88 (5/8) Brazed		
	Low pressure	mm (in.)	19.05 (3/4) Brazed		22.2 (7/8) Brazed		22.2 (7/8) Brazed		
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 1		Propeller fan x 1		
	Air flow rate	m³/min	170		185		240		
		L/s	2,833		3,083		4,000		
		cfm	6,003		6,532		8,474		
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		
	Motor output	kW	0.92 x 1		0.92 x 1		0.92 x 1		
	*6	External static press.		0 Pa (0 mmH₂O)		0 Pa (0 mmH₂O)		0 Pa (0 mmH₂O)	
		Type	Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		
Compressor	Starting method		Inverter		Inverter		Inverter		
	Motor output	kW	3.6		5.4		7.2		
	Case heater		kW		- (- V)		- (- V)		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		
External dimension HxWxD		mm	1,858 (1,798 without legs) x 920 x 740		1,858 (1,798 without legs) x 920 x 740		1,858 (1,798 without legs) x 920 x 740		
		in.	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16		73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16		73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16		
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		
	Inverter circuit (COMP/FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		
	Compressor		-		-		-		
	Fan motor		-		-		-		
Refrigerant	Type x original charge		R32 x 5.2 kg (12 lbs)		R32 x 5.2 kg (12 lbs)		R32 x 5.2 kg (12 lbs)		
	Control		Indoor LEV and BC controller		Indoor LEV and BC controller		Indoor LEV and BC controller		
Net weight		kg (lbs)	227 (501)		227 (501)		227 (501)		
Heat exchanger			Salt-resistant cross fin & copper tube		Salt-resistant cross fin & copper tube		Salt-resistant cross fin & copper tube		
Optional parts			Joint: CMY-Y102SS-G2,CMY-Y102LS-G2,CMY-R160-J1 BC controller: CMB-M104, 106, 108, 1012, 1016V-J1 Main BC controller: CMB-M108, 1012, 1016V-JA1 Sub BC controller: CMB-M104, 108V-KB1		Joint: CMY-Y102SS-G2,CMY-Y102LS-G2,CMY-R160-J1 BC controller: CMB-M104, 106, 108, 1012, 1016V-J1 Main BC controller: CMB-M108, 1012, 1016V-JA1 Sub BC controller: CMB-M104, 108V-KB1		Joint: CMY-Y102SS-G2,CMY-Y102LS-G2,CMY-R160-J1 BC controller: CMB-M104, 106, 108, 1012, 1016V-J1 Main BC controller: CMB-M108, 1012, 1016V-JA1 Sub BC controller: CMB-M104, 108V-KB1		

Notes:

*1, *2, *3 Nominal conditions (subject to JIS B8615-2)

	Indoor	Outdoor	Pipe length	Level difference
Cooling	27°C DB/19°C WB (81°F DB/66°F WB)	35°C DB/24°C WB (95°F DB/75°F WB)	7.5m (24-9/16ft.)	0m (0ft.)
Heating	20°C DB(68°F DB)	7°C DB/6°C WB(45°F DB/43°F WB)	7.5m (24-9/16ft.)	0m (0ft.)

*4 Cooling mode / Heating mode

*5 The sound pressure level measured by the conventional method in JIS for reference purpose.

*6 External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH₂O, 6.1 mmH₂O, 8.2 mmH₂O).
Consult your dealer about the specification when setting External static pressure option.

*7 R32 is flammable, and certain restrictions apply to the installation of units.

When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.
For detail, refer to the section in the Databook on installation restrictions.

*8 When connecting the indoor units of M20 or M25, the maximum connectable number of indoor units is 8.

*9 When connecting the indoor units of M20 or M25, the maximum connectable number of indoor units is 10.

*10 When connecting the indoor units of M20 or M25, the maximum connectable number of indoor units is 12.

Lineup &
Functions

Y-Series

R2-Series

ZUBADAN
-Series

S-Series

BC Controllers

Ceiling
cassette typeCeiling
concealed typeCeiling
suspended typeWall-mounted
typeFloor standing
type

Functions

LOSSNAY
SystemRemote
ControllerHot Water
Solution

R2-Series

Standard

R410A

PURY-P YNW-A2/TR2/RU2 (-BS)



Model			PURY-P200YNW-A2/TR2/RU2 (-BS)		PURY-P250YNW-A2/TR2/RU2 (-BS)		PURY-P300YNW-A2/TR2/RU2 (-BS)		
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		3-phase 4-wire 380-400-415 V 50/60 Hz		3-phase 4-wire 380-400-415 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW	22.4		28.0		33.5		
		BTU / h	76,400		95,500		114,300		
	Power input	kW	6.68		10.25		11.75		
	Current input	A	11.2-10.7-10.3		17.3-16.4-15.8		19.8-18.8-18.1		
	EER	kW / kW	3.35		2.73		2.85		
SEER	kW / kW	7.27		6.85		6.34			
Temp. range of cooling	*4	Indoor	W.B.	15.0~24.0°C (59~75°F)		15.0~24.0°C (59~75°F)		15.0~24.0°C (59~75°F)	
		Outdoor	D.B.	-5.0~52.0°C (23~126°F)		-5.0~52.0°C (23~126°F)		-5.0~52.0°C (23~126°F)	
Heating capacity (Max)	*2	kW	25.0		31.5		33.5		
		BTU / h	85,300		107,500		114,300		
	Power input	kW	6.79		9.57		9.62		
	Current input	A	11.4-10.8-10.4		16.1-15.3-14.7		16.2-15.4-14.8		
	COP	kW / kW	3.68		3.29		3.48		
	(Nominal)	*3	kW	22.4		28.0		33.5	
			BTU / h	76,400		95,500		114,300	
		Power input	kW	5.38		7.36		9.62	
		Current input	A	9.0-8.6-8.3		12.4-11.8-11.3		16.2-15.4-14.8	
		COP	kW / kW	4.16		3.80		3.80	
		SCOP	kW / kW	4.01		4.01		4.01	
Temp. range of heating	*4	Indoor	D.B.	15.0~27.0°C (59~81°F)		15.0~27.0°C (59~81°F)		15.0~27.0°C (59~81°F)	
		Outdoor	W.B.	-20.0~15.5°C (-4~60°F)		-20.0~15.5°C (-4~60°F)		-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity		50~150% of outdoor unit capacity		50~150% of outdoor unit capacity		50~150% of outdoor unit capacity		
	Model / Quantity		P10~P250, M20~M140/1~20		P10~P250, M20~M140/1~25		P10~P250, M20~M140/1~30		
Sound pressure level (measured in anechoic room)	*5, 6	dB <A>	59.0/59.0		60.5/64.0		61.0/67.0		
Sound power level (measured in anechoic room)	*5	dB <A>	76/76		78/83		80/86		
Refrigerant piping diameter	High pressure	mm (in.)	15.88 (5/8) Brazed		19.05 (3/4) Brazed		19.05 (3/4) Brazed		
	Low pressure	mm (in.)	19.05 (3/4) Brazed		22.2 (7/8) Brazed		22.2 (7/8) Brazed		
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 1		Propeller fan x 1		
Compressor	*7	Air flow rate	m³/min	170		220		240	
		L/s	2,833		3,667		4,000		
		cfm	6,003		7,768		8,474		
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		
	Motor output	kW	0.92 x 1		0.92 x 1		0.92 x 1		
	External static press.		0 Pa (0 mmH₂O)		0 Pa (0 mmH₂O)		0 Pa (0 mmH₂O)		
	Type x Quantity		Inverter scroll hermetic compressor x 1		Inverter scroll hermetic compressor x 1		Inverter scroll hermetic compressor x 1		
	Starting method		Inverter		Inverter		Inverter		
	Motor output	kW	5.0		8.0		9.2		
	Case heater	kW	—		—		—		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		
External dimension HxWxD		mm	1,858 (1,798 without legs) x 920 x 740		1,858 (1,798 without legs) x 920 x 740		1,858 (1,798 without legs) x 920 x 740		
		in.	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16		73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16		73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16		
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		
	Inverter circuit (COMP/FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		
	Compressor		—		—		—		
	Fan motor		—		—		—		
Refrigerant	Type x original charge		R410A x 5.2 kg (12 lbs)		R410A x 5.2 kg (12 lbs)		R410A x 5.2 kg (12 lbs)		
Net weight	kg (lbs)		214 (472)		223 (492)		225 (497)		
Heat exchanger			Salt-resistant cross fin & copper tube		Salt-resistant cross fin & copper tube		Salt-resistant cross fin & copper tube		
Optional parts			Joint: CMY-Y102SS-G2,CMY-Y102LS-G2, CMY-R160-J1		Joint: CMY-Y102SS-G2,CMY-Y102LS-G2, CMY-R160-J1		Joint: CMY-Y102SS-G2,CMY-Y102LS-G2, CMY-R160-J1		

Notes:

*1,*2,*3 Nominal conditions (subject to JIS B8615-2)

	Indoor	Outdoor	Pipe length	Level difference
Cooling	27°C DB/19°C WB (81°F DB/66°F WB)	35°C DB/24°C WB (95°F DB/75°F WB)	7.5m (24-9/16ft.)	0m (0ft.)
Heating	20°C DB/68°F DB	7°C DB/6°C WB(45°F DB/43°F WB)	7.5m (24-9/16ft.)	0m (0ft.)

*3 Eurovent registered

*4 -10°C D.B. (14°F D.B.), -11°C W.B. (12°F W.B.) to 21°C D.B. (70°F D.B.)/15.5°C W.B. (60°F W.B.) with cooling/heating mixed operation.

*5 Cooling mode / Heating mode

*6 The sound pressure level measured by the conventional method in JIS for reference purpose.

*7 External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH₂O, 6.1 mmH₂O, 8.2 mmH₂O).

Consult your dealer about the specification when setting External static pressure option.

*Due to continuing improvement, above specifications may be subject to change without notice.

Lineup &
Functions

Y-Series

R2-Series

ZUBADAN
-Series

S-Series

BC Controllers

Ceiling
cassette typeCeiling
concealed typeCeiling
suspended typeWall-mounted
typeFloor standing
type

Functions

LOSSNAY
SystemRemote
ControllerHot Water
Solution

R410A

Two Carrier HVAC units are shown side-by-side. They are white with blue and red accents. The units have a grid of blue panels on the front and a red vertical stripe. The Carrier logo is visible on the bottom right of each unit.

Notes:

*1.*2.*3 Nominal conditions (subject to JIS B8615-2)

	Indoor	Outdoor	Pipe length	Level difference
Cooling	27°C DB/19°C WB (81°F DB/66°F WB)	35°C DB/24°C WB (95°F DB/75°F WB)	7.5m (24-9/16ft.)	0m (0ft.)
Heating	20°C DB/68°F WB)	7°C DB/6°C WB(45°F DB/43°F WB)	7.5m (24-9/16ft.)	0m (0ft.)

*3 Eurovent registered

*4 -10°C D.B. (14°F D.B.)/-11°C W.B. (12°F W.B.) to 21°C D.B. (70°F D.B.)/15.5°C W.B. (60°F W.B.) with cooling/heating mixed operation.

*5 Cooling mode / Heating mode

*6 The sound pressure level measured by the conventional method in JIS for reference purpose.

*7 External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH₂O, 6.1 mmH₂O, 8.2 mmH₂O).

7 External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH₂O, 6.1 mmH₂O, 8.1 mmH₂O). Consult your dealer about the specification when setting External static pressure option.

*Due to continuing improvement, above specifications may be subject to change without notice.

R2-Series

Standard

R410A

PURY-P YNW-A2/TR2/RU2 (-BS)



Model			PURY-P550YNW-A2/TR2/RU2 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	60.0	
		BTU / h	204,700	
	Power input	kW	25.86	
	Current input	A	43.6-41.4-39.9	
	EER	kW / kW	2.32	
	SEER	kW / kW	6.25	
Temp. range of cooling	*4	Indoor	W.B.	15.0~24.0°C (59~75°F)
		Outdoor	D.B.	-5.0~52.0°C (23~126°F)
Heating capacity (Max)	*2	kW	69.0	
		BTU / h	235,400	
	Power input	kW	24.55	
	Current input	A	41.4-39.3-37.9	
	COP	kW / kW	2.81	
	(Nominal)	*3	kW	63.0
			BTU / h	215,000
		Power input	kW	20.00
		Current input	A	33.7-32.0-30.9
		COP	kW / kW	3.15
SCOP		kW / kW	3.51	
Temp. range of heating	*4	Indoor	D.B.	15.0~27.0°C (59~81°F)
		Outdoor	W.B.	-20.0~15.5°C (-4~60°F)
Indoor unit connectable	Total capacity		50~150% of outdoor unit capacity	
	Model / Quantity		P10~P250, M20~M140/2~50	
Sound pressure level (measured in anechoic room)	*5, 6	dB <A>	70.0/70.0	
Sound power level (measured in anechoic room)	*5	dB <A>	89/89	
Refrigerant piping diameter	High pressure	mm (in.)	22.2 (7/8) Brazed (28.58 (1-1/8) Brazed for the part that exceeds 65 m)	
	Low pressure	mm (in.)	28.58 (1-1/8) Brazed	
FAN	Type x Quantity	Propeller fan x 2		
	Air flow rate	m³/min	410	
		L/s	6,833	
		cfm	14,477	
	Control, Driving mechanism	Inverter-control, Direct-driven by motor		
	Motor output	kW	0.92 x 2	
	*7	External static press.	0 Pa (0 mmH₂O)	
Compressor	Type x Quantity	Inverter scroll hermetic compressor x 1		
	Starting method	Inverter		
	Motor output	kW	20.5	
	Case heater	kW	—	
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension HxWxD		mm	1,858 (1,798 without legs) x 1,750 x 740	
		in.	73-3/16 (70-13/16 without legs) x 68-15/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection	
	Compressor		—	
	Fan motor		—	
Refrigerant	Type x original charge		R410A x 10.8 kg (24 lbs)	
Net weight	kg (lbs)		335 (739)	
Heat exchanger			Salt-resistant cross fin & copper tube	
Optional parts			Joint: CMY-Y102SS-G2, CMY-Y102LS-G2, CMY-R160-J1	

Notes:

*1,*2,*3 Nominal conditions (subject to JIS B8615-2)

	Indoor	Outdoor	Pipe length	Level difference
Cooling	27°C DB/19°C WB (81°F DB/66°F WB)	35°C DB/24°C WB (95°F DB/75°F WB)	7.5m (24-9/16ft.)	0m (0ft.)
Heating	20°C DB(68°F DB)	7°C DB/6°C WB(45°F DB/43°F WB)	7.5m (24-9/16ft.)	0m (0ft.)

*3 Eurovent registered

*4 -10°C D.B. (14°F D.B.)/-11°C W.B. (12°F W.B.) to 21°C D.B. (70°F D.B.)/15.5°C W.B. (60°F W.B.) with cooling/heating mixed operation.

*5 Cooling mode / Heating mode

*6 The sound pressure level measured by the conventional method in JIS for reference purpose.

*7 External static pressure option is available (30 Pa/3.1 mmH₂O).

Consult your dealer about the specification when setting External static pressure option.

*Due to continuing improvement, above specifications may be subject to change without notice.

Lineup &
Functions

Y-Series

R2-Series

ZUBADAN
-Series

S-Series

BC Controllers

Ceiling
cassette typeCeiling
concealed typeCeiling
suspended typeWall-mounted
typeFloor standing
type

Functions

LOSSNAY
SystemRemote
ControllerHot Water
Solution