PCFY-MS-VKM2-E

Ceiling Suspended Indoor Unit



INDOOR UNITS		PCFY-MS40VKM2-E	PCFY-MS63VKM2-E	PCFY-MS100VKM2-E	PCFY-MS125VKM2-E
CAPACITY (kW)	Heating (nominal)	5.0	8.0	12.5	16.0
	Cooling (nominal)	4.5	7.1	11.2	14.0
	Heating	5.0	8.0	12.5	16.0
	Total Cooling - Hi (Sensible)	4.00 (3.00)	6.40 (4.60)	10.00 (7.10)	12.50 (8.80)
	Total Cooling - Mi1	3.93	6.22	9.84	12.07
	Total Cooling - Mi2	3.82	6.09	9.61	11.57
	Total Cooling - Lo	3.69	5.93	9.13	10.92
POWER INPUT (kW)	Heating (nominal)	0.04	0.05	0.09	0.11
	Cooling (nominal)	0.04	0.05	0.09	0.11
AIRFLOW (l/s)	Lo-Mi2-Mi1-Hi	167–183–200–217	233–250–267–300	350–400–433–467	350-400-450-517
SOUND PRESSURE LEVEL (dBA)	Lo-Mi2-Mi1-Hi	29-32-34-36	31-33-35-37	36-38-41-43	36-39-42-44
WEIGHT (kg)		25	32	37	39
DIMENSIONS (mm)	Width	960	1280	1600	1600
	Depth	680	680	680	680
	Height	230	230	230	230
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single
RUNNING CURRENT (A)	Heating / Cooling	0.28 / 0.28	0.33 / 0.33	0.65 / 0.65	0.76 / 0.76
FUSE RATING (BS88) - HRC (A)		6	6	6	6
MAINS CABLE No. Cores		3	3	3	3

Notes: PCFY-MS-VKM2-E units are compatible for use with PURY-(E)M-YXM-A, PUHY-M-YXM-A, PURY-(E)P-YNW-A2, PUHY-P-YNW-A2, PUMY-(S)P-V/YKM/YBM, PUMY-(S)M-V/YKM, PQRY-P-Y(S)LM-A1 & PQHY-P-Y(S)LM-A1 outdoor units only.

PCFY-MS-VKM2-E DIMENSIONS

PCFY-MS40VKM2-E

FRONT VIEW



LOWER VIEW



SIDE VIEW



PCFY-MS63VKM2-E

FRONT VIEW



LOWER VIEW



SIDE VIEW



PCFY-MS100/125VKM2-E

FRONT VIEW



LOWER VIEW

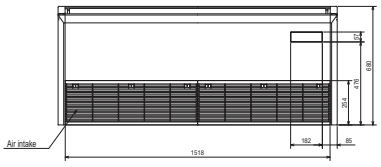

SIDE VIEW

